

SLIDE BUSH

SLIDE BUSH

STRUCTURE AND ADVANTAGES	C-2
TYPES	C-3
BLOCK SERIES	C-6
SPECIFICATIONS	C-7
ACCURACY	C-7
LIFE CALCULATION	C-7
LOAD RATING FOR OPEN TYPE SLIDE BUSH	C-8
MOUNTING	C-8
LUBRICATION	C-11
DUST PREVENTION	C-11
COUNTERMEASURE FOR DUST PREVENTION	C-12
FIT SERIES	C-13
SURFACE TREATMENT ANTIRUST EFFECT	C-14
SPECIAL SPECIFICATIONS	C-14
ACCURACY OF CE-CD TYPE	C-14
USE AND HANDLING PRECAUTIONS	C-15
NOTES ON USAGE OF BLOCK SERIES	C-15
DIMENSION TABLE	C-16~

SLIDE BUSH

The NB slide bush is a linear motion mechanism utilizing the rotational motion of ball elements. Since linear motion is obtained using a simple mechanism, the slide bush can be used in a wide variety of applications, including transportation equipment, food processing equipment, and semiconductor manufacturing equipment.

STRUCTURE AND ADVANTAGES

The outer cylinder of slide bush contains a ball retainer that is perfectly designed to control the circulation of ball elements, resulting in smooth linear motion.

Compact Mechanism

The NB slide bush uses a round shaft for the guiding axis, resulting in space-saving, which allows for compact designs.

A Wide Variety of Shapes and Installation Methods

The NB slide bush is available in various types, standard, clearance-adjustable, open, flange, etc., for a various applications.

Selection According to Environment

NB slide bushes are available in standard and anti-corrosion types. Available options include steel-retainer suitable for use in harsh environments and resin retainer for low acoustic, low-cost requirement. Other options can be specified according to the application requirements.

Compatibility

The NB slide bush is fully compatible with a variety of shaft types.

Doublelip-Seal

Doublelip-seals reduce the grease leakage, keeping the same function as UU seals which prevent the foreign particles from entering the bush. (see page C-11)

Figure C-1 Basic Structure of NB Slide Bush (SM, KB, SW)


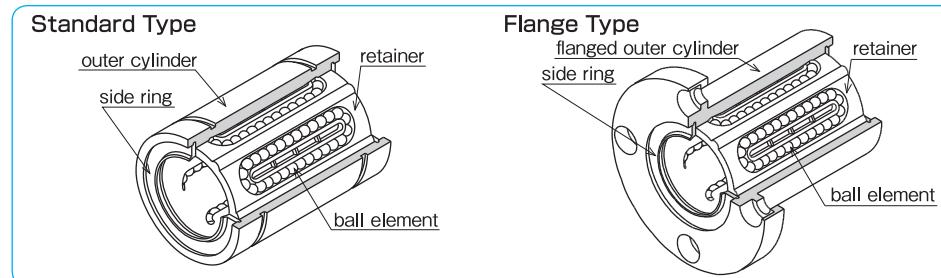


Figure C-2 Basic Structure of NB Slide Bush (GM)

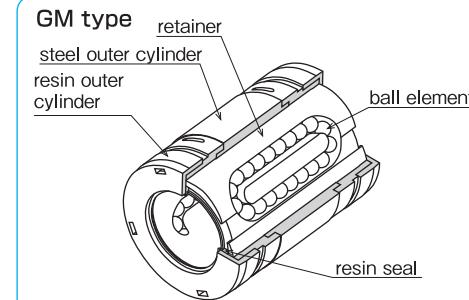

TYPES

Table C-1 Type (1)

type	standard	anti-corrosion	page
standard type	SM KB SW	SMS KBS SWS	C- 16 C- 80 C-100
clearance-adjustable (AJ) type	SM-AJ KB-AJ SW-AJ	SMS-AJ KBS-AJ SWS-AJ	C- 18 C- 82 C-102
open (OP) type	SM-OP KB-OP SW-OP	SMS-OP KBS-OP SWS-OP	C- 20 C- 84 C-104
long type	SM-G-L	—	C- 22
double-wide type	SM-W KB-W SW-W	SMS-W KBS-W SWS-W	C- 24 C- 86 C-106

Table C-2 Type (2)




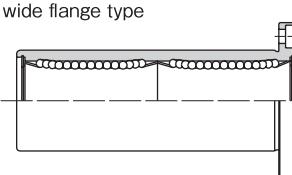
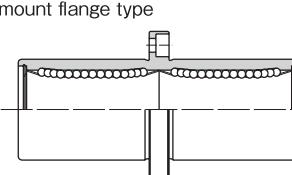
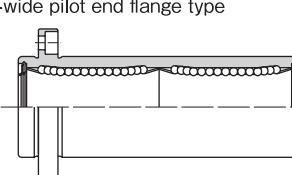
	type		standard	anti-corrosion	page
flange type		  	SMF KBF SWF SMK KBK SWK	SMSF KBSF SWSF SMSK KBSK SWSK	C- 26 C- 88 C-108 C- 28 C- 90 C-110
			SMT	SMST	C- 30
flange type with pilot end		  	SMF-E SMK-E SMT-E	SMSF-E SMSK-E SMST-E	C- 32 C- 34 C- 36
long flange type			SMK-G-L	—	C- 38
double wide flange type		  	SMF-W KBF-W SWF-W SMK-W KBK-W SWK-W	SMSF-W KBSF-W SWSF-W SMSK-W KBSK-W SWSK-W	C- 40 C- 92 C-112 C- 42 C- 94 C-114
center mount flange type		   	SMFC KBFC SMKC KBKC	SMSFC KBSFC SMSKC KBSKC	C- 46 C- 96 C- 48 C- 98
double-wide pilot end flange type		  	SMF-W-E SMK-W-E SMT-W-E	SMSF-W-E SMSK-W-E SMST-W-E	C- 52 C- 54 C- 56

Table C-3 Type (3)

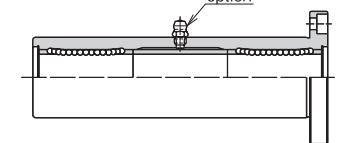
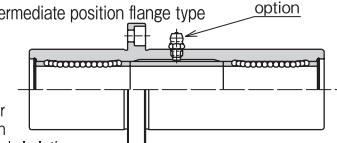
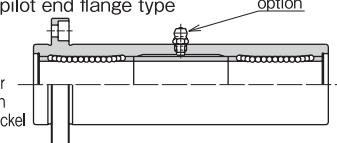
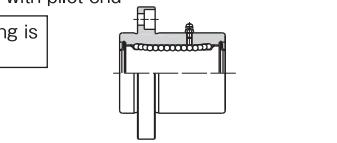
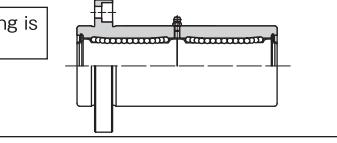


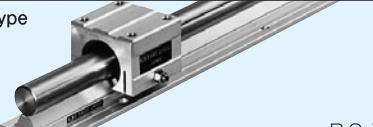
	type		standard	page
triple wide flange type		  	TRF	C- 58
			TRK	C- 60
			TRT	C- 62
※ Outer cylinder is treated with electroless nickel plating				
triple-wide intermediate position flange type		  	TRFC	C- 64
※ Outer cylinder is treated with electroless nickel plating				
triple-wide pilot end flange type		  	TRF-E	C- 68
※ Outer cylinder is treated with electroless nickel plating				
flange type with pilot end		  	TQF-E	C- 72
Grease fitting is standard				
double flange type with pilot end		  	TQF-W-E	C- 76
Grease fitting is standard				
			TQK-W-E	C- 78

Table C-4 Type (4) GM Series

	type		standard	page
GM single type			GM	C-116
GM double-wide type			GM-W	C-117

BLOCK SERIES

	single	double-wide
SMA・AK・SWA Type This type is the most commonly used standard type. The housing is made of aluminum alloy. The wide (W) type is also available for SMA and AK types.	SMA type  P.C-118	SMA-W type  P.C-120
	AK type  P.C-122	AK-W type  P.C-124
	SWA type  P.C-140	
SMP Type The housing has a self-aligning feature. This feature will absorb inaccuracy of the installation base so that a smooth movement is expected.	SMP type  P.C-126	
SMJ・SWJ Type Clearance-adjustment is achieved by creating a slit on the SMA/SWA type housing. Less clearance between block and shaft results in higher positioning accuracy by tightening the adjustment screw.	SMJ type  P.C-128	SWJ type  P.C-142
SME・SMD・SWD Type Open type housing allows a support from below so that a deflection of the shaft is minimized for high loading or long-stroke applications. The wide(W) type is also available for SME type.	SME type  P.C-130	SME-W type  P.C-132
	SMD type  P.C-134	SWD type  P.C-144
CE・CD Type This type is a unit of block(s), shaft, and support rail that contributes to a total cost reduction. The maximum length is 2,000mm for the support rail and for the shaft the maximum length is 4,500mm.	CE type  P.C-136	CD type  P.C-138

SPECIFICATIONS

Series

The NB slide bush is available in three primary dimensional series, each with different dimensions and tolerances depending on the location of use. Please select the series that is most appropriate for your location.

Table C-5 Series and Use Location

series	location			
	Japan	Asia	Europe	North America
metric	SM	◎	◎	○
	GM	○	○	○
	KB	○	○	○
inch	SW	○	○	○

◎ generally used ○ rarely used

Table C-6 Load Comparison

type	basic dynamic load rating	basic static load rating	allowable static moment
single	1	1	1
long	1.3	1.8	approx. 4
GM-W	1.6	2	approx. 4
SM double	1.6	2	approx. 6
triple	1.6	2	approx. 21


* The single type is designated as "1" for comparison purposes.

Table C-7 Operating Environment Temperature

outer cylinder	retainer	material	temperature range
		steel	
steel	steel	—20°C~110°C	
	resin	—20°C~ 80°C	
stainless	steel	—20°C~140°C*	
	resin	—20°C~ 80°C	

* If a seal is used in the stainless steel slide bush, the temperature is up to 120°C. Please contact NB if a temperature range exceeds 140°C.

Figure C-3

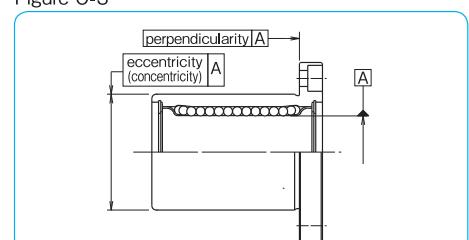

ACCURACY

The accuracy of the NB slide bush is represented as eccentricity (concentricity) and perpendicularity as shown in Fig. C-3.

LIFE CALCULATION

Since ball elements are used as the rolling element in the NB slide bush, the following equation is used to calculate the travel life.

$$L = \left(\frac{f_H \cdot f_T \cdot f_C}{f_W} \cdot \frac{C}{P} \right)^3 \cdot 50$$

L: rated life (km) f_H: hardness coefficient
f_T: temperature coefficient f_C: contact coefficient
f_W: applied load coefficient C: basic dynamic load rating (N)

P: applied load (N)

*Refer to page Eng-5 for the coefficients.

If the stroke distance and number of strokes per unit time are constant, the life time is calculated using the following equation.

$$L_h = \frac{L \cdot 10^3}{2 \cdot l_s \cdot n_1 \cdot 60}$$

L_h: life time (hr) l_s: stroke length (m)

L: rated life (km) n₁: number of cycles per minute (cpm)

LOAD RATING FOR OPEN TYPE SLIDE BUSH

For the open type slide bush an opening is provided to allow the shaft to be supported from underneath. In case a load is constantly applied in the direction of the opening (for example, being used with a vertical shaft or an overhang loading is applied), the load rating decreases due to less number of loaded rows of ball elements (Table C-8). Therefore, the load rating must be calibrated at the time of design based on the direction of the loading.

Table C-8 Direction of Load and Basic Static Load Rating

part number	SM10G~16G-OP KB10G~16G-OP SW 8G~10G-OP SME (D) 10G~16G CE (D) 16 <small>(The loading from below cannot be received by retainer made of stainless steel.)</small>	SM20 (G) -OP KB20 (G) -OP SW12 (G) -OP SME (D) 20 CE (D) 20	SM25 (G) ~100-OP KB25 (G) ~80-OP SW16 (G) ~64-OP SME25~50 SMD25~30 CE (D) 25~30	SM120,150-OP
loading from above				
C				
loading from below				
	0.64C	0.54C	0.57C	0.35C

* Excludes all 3-row steel retainer types. Please contact NB for 3-row steel retainer.

MOUNTING

Examples of Mounting methods are shown in Figures C-4~7.

Figure C-4 Standard Type

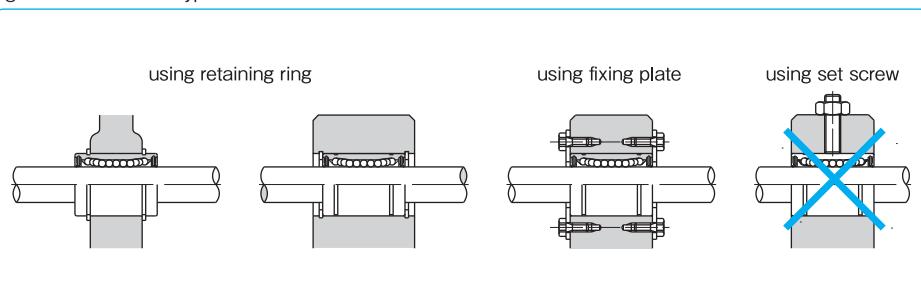


Figure C-5 Clearance Adjustable Type

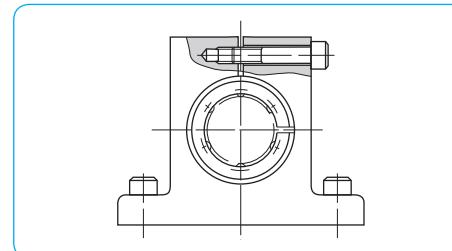


Figure C-6 Open Type


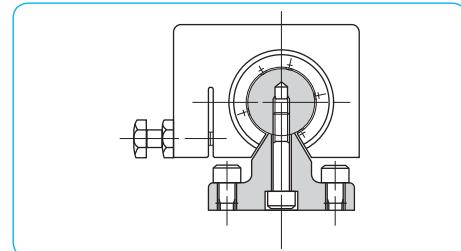


Figure C-7 Flange Type

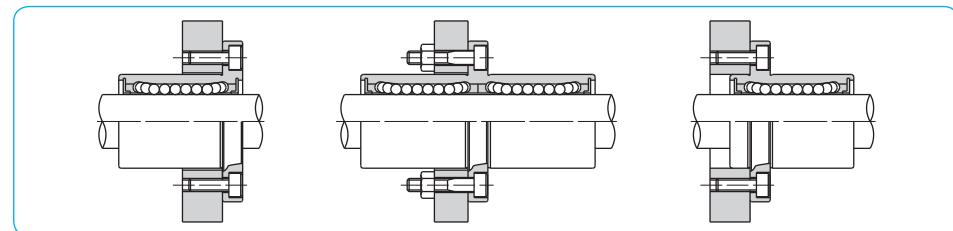

Fit

The normal clearance fit listed in Table C-9 is generally selected as a shaft outer diameter tolerance for the NB slide bush. The transition fit is selected for a higher accuracy by reducing clearance between slide bush and shaft. Matching bush and shaft (FIT series) is also available for customer's specified clearance. Please be cautious not to apply excess preloading with clearance adjustable and open types. Please keep pre-loading within the maximum radial clearance listed in the dimension table. The flange-type bush is generally inserted into an installation bore, which is slightly larger than the outer cylinder. However, if the outer cylinder is used as the pilot, H7 tolerance is recommended for housing. The recommended clearances for the flange type are listed in Table C-10.

Table C-9 Recommended Fit

series	accuracy grade	shaft diameter clearance fit	housing inner diameter transition fit	series	shaft diameter clearance fit	housing inner diameter transition fit
SM	high	g6	h6	H7	J7	
	precision(P)	g5	h5	H6	J6	
SM-G-L	high	g6	—	H7	—	
SM-W	high	g6	—	H7	—	
KB	high	h6	j6	H7	J7	
KB-W	high	h6	—	H7	—	
SW	high	g6	h6	H7	J7	
	precision(P)	g5	h5	H6	J6	
SW-W	high	g6	—	H7	—	
GM	high	g6	h6	H7	—	
GM-W	high	g6	—	H7	—	

Table C-10 Recommended Fit (Flange Type)

series	shaft diameter clearance fit	transition fit
SMF	g6	h6
SMK-G-L	g6	—
SMF-W	g6	—
TRF	g6	—
KBF	h6	j6
KBF-W	h6	—
SWF	g6	h6
SWF-W	g6	—

Notes on Shaft Selection:

In order to ensure a high accuracy motion of the bush, it is essential to select a high quality shaft.

In selecting a shaft, please take note of:

Hardness: 58HRC or more (refer to hardness coefficient on page Eng-5) recommended

Surface Roughness: less than Ra0.4 recommended

Retaining Ring for Mounting

It is possible to mount NB slide bush by retaining ring. It is recommended to select the retaining ring with reference to the Table C-11.

Figure C-8 Retaining Ring

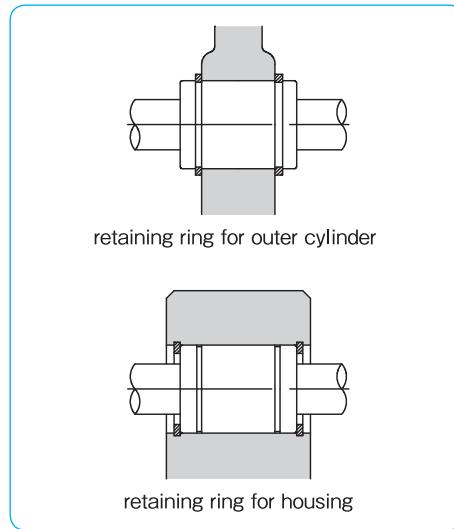


Table C-11 Applicable retaining ring

part number	size of retaining ring for outer cylinder	size of retaining ring for housing
SM 3 KB 3	—	※ 7
SM 4 KB 4	—	※ 8
SM 5	10	※ 10
SM 6 GM 6 KB 5	12	※ 12
SM 8s	15	15
SM 8 GM 8	15	15
KB 8	16	16
SM 10 GM10 KB10	19	19
SM 12 GM12	21	21
KB12	22	22
SM 13 GM13	※ 23	※ 23
KB16	26	26
SM 16 GM16	28	28
SM 20 GM20 KB20	32	32
SM 25 GM25 KB25	40	40
SM 30 GM30	45	45
KB30	※ 47	47
SM 35	52	52
SM 40	60	60
KB40	62	62
KB50	75	75
SM 50	80	80
SM 60 KB60	90	90
SM 80 KB80	120	120
SM100	※ 150	※ 150
SM120	※ 180	※ 180
SM150	※ 210	※ 210

* part is not in the JIS standard. Please contact NB for details.

LUBRICATION

It is important to lubricate the slide bush for an accurate operation and for a long life. Anti-rust oil is applied to NB slide bush prior to shipment. The NB selected anti-rust oil has a little effect on the lubricant, however, please apply lubricant after cleaning the slide bush by, for example, kerosene, etc.

Grease Lubricant

Prior to usage, please apply grease, then re-lubricate periodically according to the operating conditions. (Lithium soap-based grease is recommended.) Re-lubrication can be done by directly applying grease inside the ball bush or by using a grease fitting as Figure C-9 shows.

A special low dust generating grease is optional for clean room application, please refer to page Eng-40.

Oil Lubricant

Prior to usage, please apply oil directly to the shaft surface or by using an oil hole as Figure C-10 shows. Turbine oil (ISO standard VG32-68) is recommended.

Oil holes can be machined (see Figure C-10) in the center portion of the outer cylinder. Please contact NB for oil hole specification.

Figure C-9 Grease Fitting


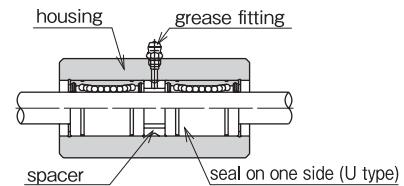


Figure C-10 Oil Hole -Specification-

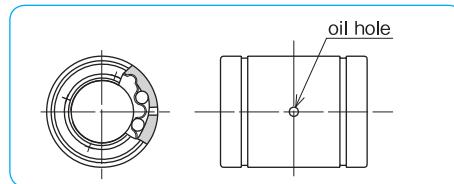

DUST PREVENTION

Seal

The seals prevent dust from entering the slide bush in order to retain the motion accuracy, resulting in a long life time. The UU type is a standard option that has seals on both sides. The U type has a seal on one side only and is available for the standard, clearance adjustable, and open types. Nitril rubber, which has low wear and good sealing characteristics, is used as the seal material.

* Resin seals are used for GM and GW series.

Doublelip-Seal

A doublelip-seal is a combination of outside lip-seal and inside lip-seal. Outside lip-seal prevents foreign particles from entering the bush and inside lip-seal prevents grease from leaking out of the bush.

By the doublelip-seal, the seal resistance shall be increased by some margin. Applicable Part Number: SM(S) 6 to 30, TRF 6 to 30.

Please refer to the dimension table for seal option.

Fluororubber Seal

For a high temperature application, fluororubber seals are available on the SM series size 3 to 30. Please contact NB for details.

Figure C-11 Seal Profile


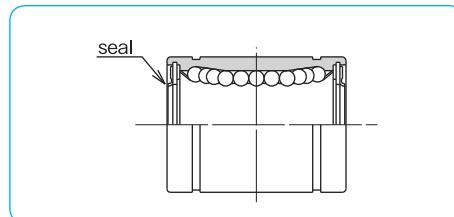



Figure C-12 Doublelip-Seal

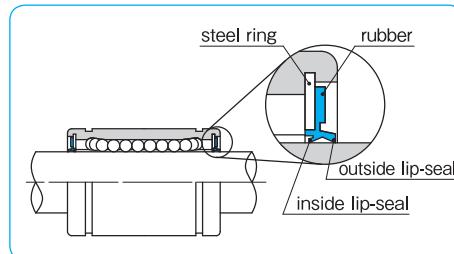

COUNTERMEASURE FOR DUST PREVENTION

A smooth ball circulation is hindered by dust or foreign particles inside the slide bush. Seals on both sides is a standard option for the NB slide bush, however, in a harsh environment it is necessary to attach bellows or protective covers.

Figure C-13 Example of Dust Prevention

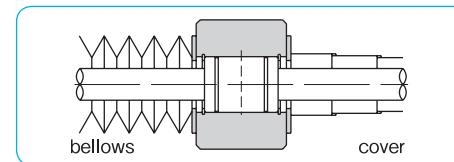

Felt Seal (Except Flange Type)

If the above dust prevention mechanism is difficult to design, a felt seal is recommended. Due to the oil impregnation effect of the felt, it is possible to extend the lubrication interval and to improve dust resistance.

●Instruction

The felt seal is used by press-fitting into a housing which is manufactured according to the recommended fits in Table C-9.

Stopper of slide bush is necessary other than felt seal.

Insert it between the slide bush and retaining ring as shown in the left figure of Fig. C15, or provide a place to press fit outside the retaining ring as shown in the right figure.

※At the time of shipment, the oil impregnation to the felt seal is not applied.

Figure C-14 Felt Seal


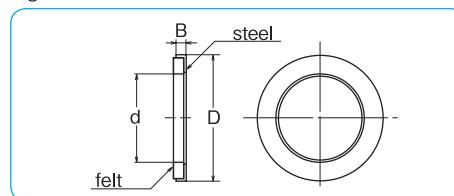


Table C-12

part number	major dimensions(mm)		applicable slide bush
d	D	B	
FLM 6	6	12	2 SM 6 / GM 6
FLM 8	8	15	2 SM 8 / GM 8
FLM 10	10	19	3 SM 10 / GM10
FLM 12	12	21	3 SM 12 / GM12
FLM 13	13	23	3 SM 13 / GM13
FLM 16	16	28	4 SM 16 / GM16
FLM 20	20	32	4 SM 20 / GM20
FLM 25	25	40	5 SM 25 / GM25
FLM 30	30	45	5 SM 30 / GM30
FLM 35	35	52	5 SM 35
FLM 40	40	60	5 SM 40
FLM 50	50	80	10 SM 50
FLM 60	60	90	10 SM 60
FLM 80	80	120	10 SM 80
FLM100	100	150	10 SM100

Figure C-15 Example of Felt Seal Installation

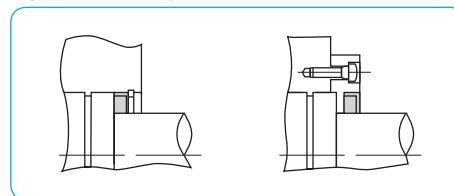


FIT SERIES

Due to the combined tolerances of the bush's bore and the shaft's diameter, accuracy can be affected by clearance or increased dynamic friction caused by preloading.

NB's FIT Series takes advantages of the lower cost slide bush and the precision ground shaft to achieve a target clearance in order for the linear system to produce a smooth, high-accuracy performance.

part number structure

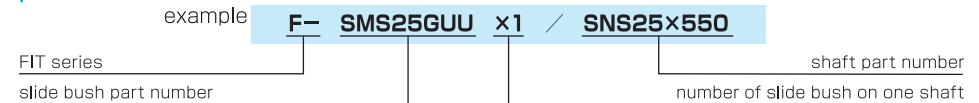

- Please refer to corresponding catalog pages for details.

- Please specify on the drawing about the shaft machining, radial clearance, match-marking, etc.

Recommended Radial Clearance

Depending on the type of application, the clearance range varies, please use the chart below as a guideline.

target	clearance (+)	← 0 →	clearance (-)
light motion			
high accuracy			
no play			

Slide Bush, Radial Clearance (-) , Negative Limit


Negative clearance is opted to reduce backlash. Please refer to the chart below for the negative clearance limits.

size	3~8	10~13	16~25	30~35	40	50~60
radial clearance limit	-3μm	-4μm	-6μm	-8μm	-10μm	-13μm

- The off-center of the housing causes uneven loading on the slide bush, please pay special attention to the centering of the housing especially when negative clearance is a requirement.

- Please contact NB for details on the extra preloading requirement or on other part numbers like SRE, SR, etc.

Figure C-16 Radial Clearance between Slide Bush and Shaft

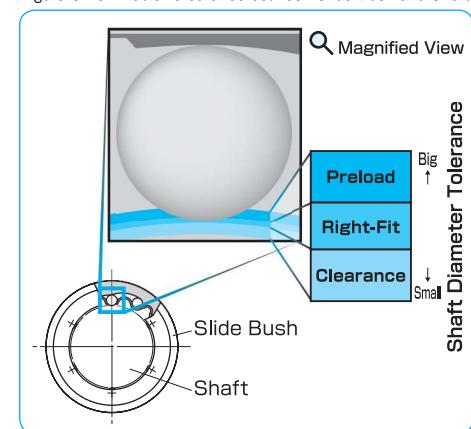

SURFACE TREATMENT AND ANTIRUST EFFECT

In order to adapt various kinds of environment, NB provides flange bushes with surface treatment as a standard.

Table C-13 Surface Treatment

part number	surface treatment	anti-rust effect	color
SK	electroless nickel plating	◎	silver
LF	low temperature black chrome treatment with fluoride coating	◎	black
SB	black oxide (excluding anti-corrosion type)	△	black
SC	industrial chrome plating	○	silver
standard	High-carbon chromium bearing steel (without surface treatment)	—*2	silver
anti-corrosion	Martensite stainless steel (without surface treatment)	○	silver

◎:excellent ○:highly effective ○:effective △:mildly effective

*1 : Please note that tolerance of bushes with surface treatment may be different from the tolerance in dimension table.
Please contact NB for details of thickness of plating.


*2 : In order to prevent corrosion, please do not leave de-greased standard bush without surface treatment.

SPECIAL SPECIFICATIONS

Special Specifications

Please contact NB for more information on surface treatment, oil hole (Figure C-10), flange mounting hole (Figure C-17), etc.

Figure C-17 Examples of Special Installation Hole

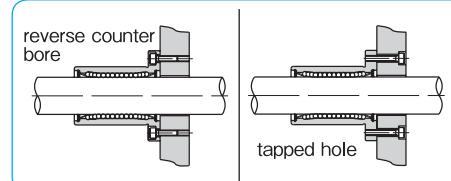

ACCURACY OF CE・CD TYPE

The accuracy of CE・CD-type support rails are measured as shown in Figure C-18.

Figure C-18 Accuracy Measurement


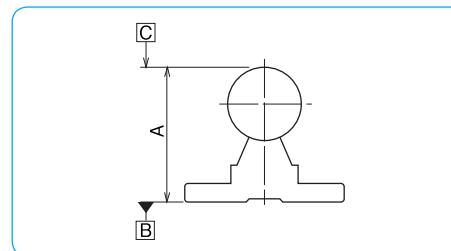


Figure C-19 Accuracy of CE・CD-type Support Rails

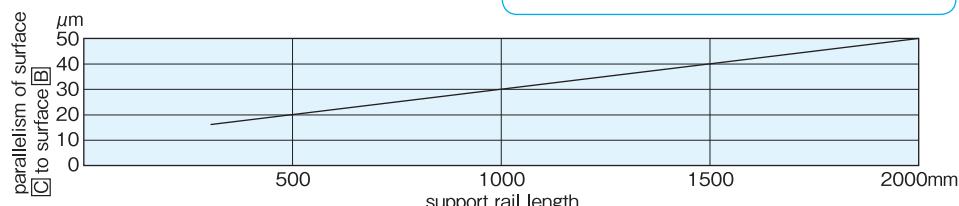

USE AND HANDLING PRECAUTIONS

The NB slide bush is a precision component, please handle with care to maintain its high motion accuracy.

The slide bush is designed for linear motion, so that for applications in which a combination of linear and rotational motion is a requirement, let us recommend Stroke Bush, Slide Rotary Bush, or Rotary Ball Spline.

Notes on Installation

When inserting a slide bush into a housing, carefully insert it by using a jig to apply a uniform pushing force at the end of the outer cylinder, as illustrated in Figure C-21. Motion performance may be diminished if an excessive force is applied to the resin portion of the outer cylinder, the side-ring, or the seal. Ensure that all burrs are removed from the shaft and carefully install the bush by aligning it with the center of the bore. Excessive force may drop out the ball elements during insertion. When two or more shafts are used, the parallelism of the shafts will greatly affect the motion characteristics and life of the slide bush. Please check the parallelism by moving the slide bush back and forth the length of stroke to check for freedom of movement before final fixing of the shaft. Please refer to page F-3 for shaft specifications.

GM Standard Type

Please avoid a tension load when retaining rings are used for installation.

NOTES ON USAGE OF BLOCK SERIES

Reference Surface

The NB slide units have a reference surface as shown in Figure C-23. Accuracy is achieved by simply pushing the reference surface against the shoulder of the installation surface. (Excluding RBW and SMP types)

Clearance Adjustment

On the clearance adjustment type please avoid excessive preloading. In the same manner please do not apply excessive torque when tightening the screws.

Mounting of RBW Type

RBW type has a resin housing. Table C-14 shows proper torque values.

Recommended Fit

For clearance fit please use a shaft with g6 tolerance and for transition fit a shaft with h6 tolerance. (Excluding adjustable-clearance and open types)

Special Installation Case of SMJ Type

Special mounting holes will be required for installations such as Figure C-24 shows. Please contact NB for special requirements.

Figure C-20 Direction of Motion




Figure C-21 Insertion of Slide Bush

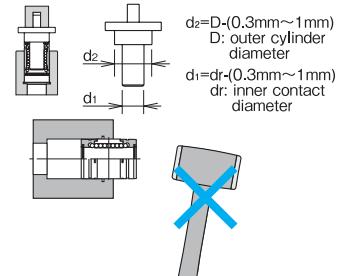


Figure C-22 Installation of GM Standard Type

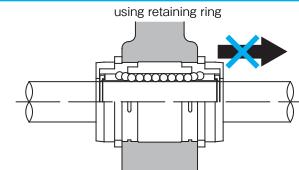


Figure C-23 Reference Surface


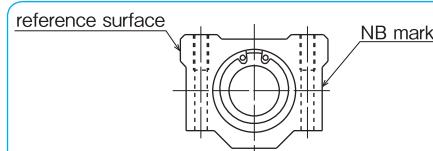


Table C-14 Recommended Torque for RBW Type

part number	mounting screw	torque N・m
RBW8	#6	1.3
RBW10,12	#8	1.9
RBW16	#10	5.2

Figure C-24 Special Installation of SMJ Type

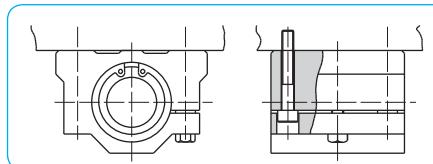

SM TYPE



— Standard Type —

**part number structure**

example	SMS 25 G UU-P
specification	
SM: standard	
SMS: anti-corrosion	
inner contact diameter (dr)	
retainer material	
blank: standard/steel	
anti-corrosion/stainless steel	
G: resin	
seal	accuracy grade
blank: without seal	blank: high
U: seal on one side	P: precision
UU: seals on both sides	
Z: doublelip-seal on one side	
ZZ: doublelip-seals on both sides	

Doublelip-seal is available for size 6 to 30.

part number		standard		anti-corrosion		number of ball circuits	major dimensions		D tolerance μm
steel retainer	resin retainer	stainless retainer	resin retainer	mm	dr precision	μm	high	mm	
SM 3	SM 3G	SMS 3	SMS 3G	4	3	0	0	7	0
SM 4	SM 4G	SMS 4	SMS 4G	4	4	-5	-8	8	-9
SM 5	SM 5G	SMS 5	SMS 5G	4	5			10	
SM 6	SM 6G	SMS 6	SMS 6G	4	6			12	
SM 8s	SM 8sG	SMS 8s	SMS 8sG	4	8			15	0
SM 8	SM 8G	SMS 8	SMS 8G	4	8			15	-11
SM 10	SM10G	SMS10	SMS10G	4	10	-6	-9	19	
SM 12	SM12G	SMS12	SMS12G	4	12			21	0
SM 13	SM13G	SMS13	SMS13G	4	13			23	-13
SM 16	SM16G	SMS16	SMS16G	4	16			28	
SM 20	SM20G	SMS20	SMS20G	5	20	0	0	32	0
SM 25	SM25G	SMS25	SMS25G	6	25	-7	-10	40	
SM 30	SM30G	SMS30	SMS30G	6	30			45	-16
SM 35	SM35G	SMS35	SMS35G	6	35	0	0	52	0
SM 40	SM40G	SMS40	SMS40G	6	40	-8	-12	60	-19
SM 50	SM50G	SMS50	SMS50G	6	50			80	
SM 60	SM60G	SMS60	SMS60G	6	60	0	0	90	0
SM 80	SM80G	SMS80	SMS80G	6	80	-9	-15	120	-22
SM100	—	—	—	6	100	0	0	150	0
SM120	—	—	—	8	120	-10	-20	180	-25
SM150	—	—	—	8	150	0/-13	0/-25	210	0/-29

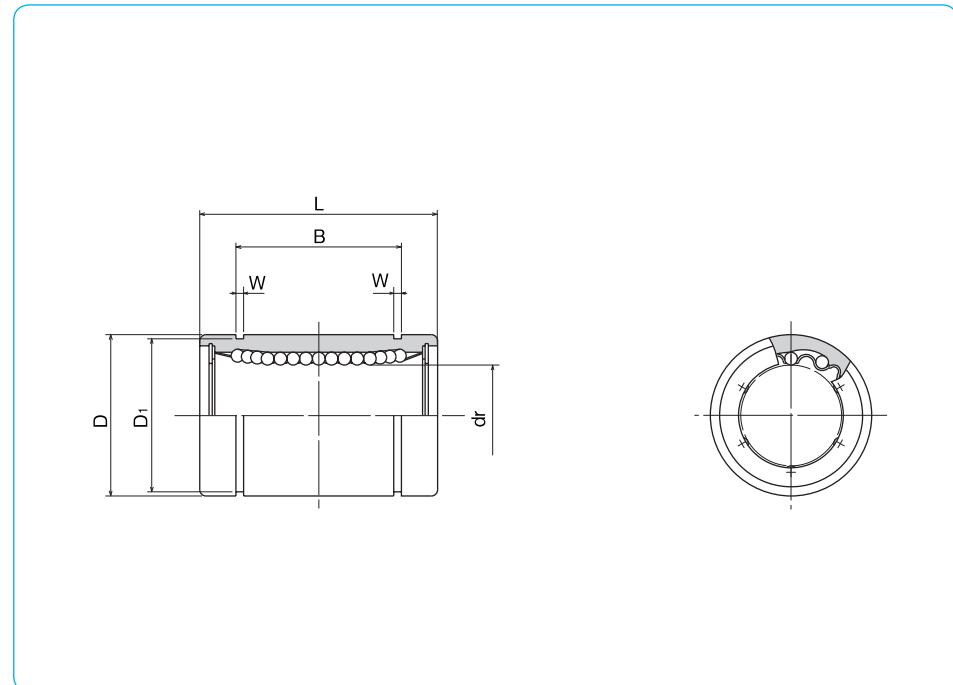

L mm	tolerance mm	B mm	tolerance mm	W mm	D ₁ mm	eccentricity	radial clearance (maximum) μm	basic load rating dynamic C N	load rating static Co N	mass g	shaft diameter mm
						precision μm	high μm				
10	0	—	—	—	—	4	8	69	105	1.4	3
12	-0.12	—	—	—	—			88	127	2.0	4
15		10.2		1.1	9.6			167	206	4.0	5
19		13.5		1.1	11.5			206	265	8.5	6
17		11.5		1.1	14.3			176	216	11	8
24		17.5		1.1	14.3			274	392	17	8
29	0	22	-0.2	1.3	18	8	12	372	549	36	10
30	-0.2	23		1.3	20			510	784	42	12
32		23		1.3	22			510	784	49	13
37		26.5		1.6	27			774	1,180	76	16
42		30.5		1.6	30.5			882	1,370	100	20
59		41		1.85	38	10	15	980	1,570	240	25
64		44.5		1.85	43			1,570	2,740	270	30
70		49.5	0	2.1	49			1,670	3,140	425	35
80	-0.3	60.5	-0.3	2.1	57	12	20	2,160	4,020	654	40
100		74		2.6	76.5			3,820	7,940	1,700	50
110		85		3.15	86.5	17	25	4,700	10,000	2,000	60
140		105.5		4.15	116			7,350	16,000	4,520	80
175		125.5	0	4.15	145			14,100	34,800	8,600	100
200	-0.4	158.6	-0.4	4.15	175	20	30	16,400	40,000	15,000	120
240		170.6		5.15	204	25	40	21,100	54,300	20,250	150

1N = 0.102kgf

SM-AJ TYPE


— Clearance Adjustable Type —

**part number structure**

example	SMS	25	G	UU	-AJ	
specification SM: standard SMS: anti-corrosion						
inner contact diameter (dr)			clearance-adjustable			
retainer material blank: standard/steel anti-corrosion/stainless steel G: resin						
seal			blank: without seal U: seal on one side UU: seals on both sides			

steel retainer	part number		number of ball circuits	dr tolerance*	major dimensions	
	standard	anti-corrosion			D tolerance*	
	steel retainer	resin retainer	resin retainer	mm	mm	μm
—	SM 6G-AJ	—	SMS 6G-AJ	4	6	
—	SM 8sG-AJ	—	SMS 8sG-AJ	4	8	
—	SM 8G-AJ	—	SMS 8G-AJ	4	8	
—	SM10G-AJ	—	SMS10G-AJ	4	10	
SM 12-AJ	SM12G-AJ	SMS12-AJ	SMS12G-AJ	4	12	
SM 13-AJ	SM13G-AJ	SMS13-AJ	SMS13G-AJ	4	13	
SM 16-AJ	SM16G-AJ	SMS16-AJ	SMS16G-AJ	4	16	
SM 20-AJ	SM20G-AJ	SMS20-AJ	SMS20G-AJ	5	20	
SM 25-AJ	SM25G-AJ	SMS25-AJ	SMS25G-AJ	6	25	
SM 30-AJ	SM30G-AJ	SMS30-AJ	SMS30G-AJ	6	30	
SM 35-AJ	SM35G-AJ	SMS35-AJ	SMS35G-AJ	6	35	
SM 40-AJ	SM40G-AJ	SMS40-AJ	SMS40G-AJ	6	40	
SM 50-AJ	SM50G-AJ	SMS50-AJ	SMS50G-AJ	6	50	
SM 60-AJ	SM60G-AJ	SMS60-AJ	SMS60G-AJ	6	60	
SM 80-AJ	SM80G-AJ	—	—	6	80	
SM100-AJ	—	—	—	6	100	
SM120-AJ	—	—	—	8	120	
SM150-AJ	—	—	—	8	150	0/-25
					210	0/-29

* Accuracy is measured prior to machining clearance slit.

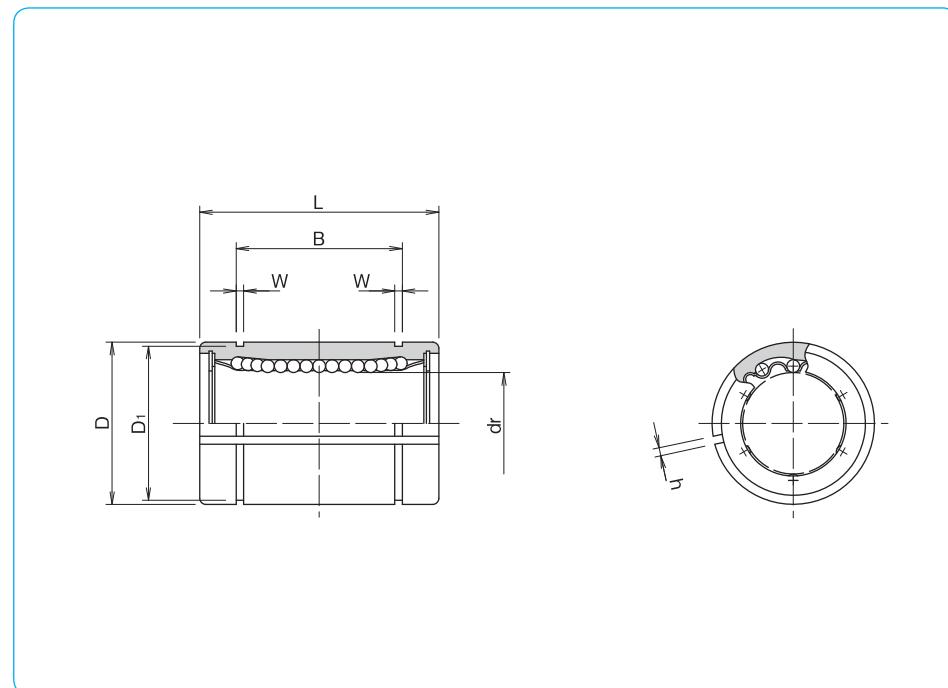


L tolerance mm	B tolerance mm	W mm	D1 mm	h mm	eccentricity* μm	basic load rating dynamic C N	basic load rating static Co N	mass g	shaft diameter mm
0 -0.2	0 -0.2	13.5	1.1	11.5	1	12	206	265	7.5
		11.5	1.1	14.3	1		176	216	8
		17.5	1.1	14.3	1		274	392	14.7
		22	1.3	18	1		372	549	29
		23	1.3	20	1.5		510	784	41
		23	1.3	22	1.5		510	784	48
		26.5	1.6	27	1.5		774	1,180	75
		30.5	1.6	30.5	1.5		882	1,370	98
0 -0.3	0 -0.3	41	1.85	38	2	15	980	1,570	237
		44.5	1.85	43	2.5		1,570	2,740	262
		49.5	2.1	49	2.5		1,670	3,140	420
		60.5	2.1	57	3		2,160	4,020	640
		74	2.6	76.5	3		3,820	7,940	1,680
		85	3.15	86.5	3		4,700	10,000	1,980
		105.5	4.15	116	3		7,350	16,000	4,400
		125.5	4.15	145	3		14,100	34,800	8,540
0 -0.4	0 -0.4	158.6	4.15	175	3	30	16,400	40,000	14,900
		170.6	5.15	204	3		21,100	54,300	20,150

1N ≈ 0.102kgf



SM-OP TYPE

— Open Type —

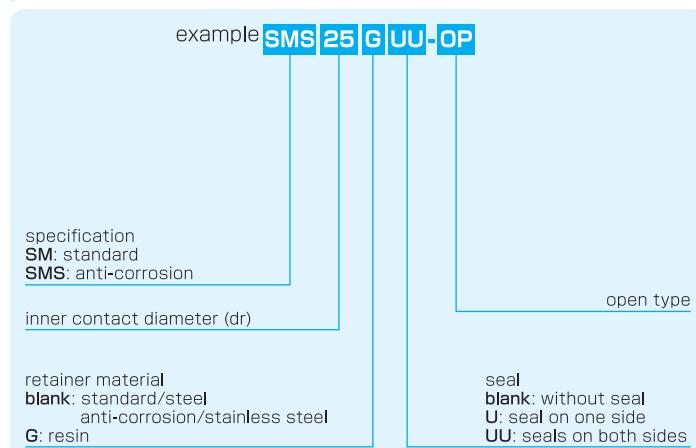**part number structure**

part number				number of ball circuits	dr mm	tolerance* μm	major dimensions	
standard steel retainer	resin retainer	anti-corrosion stainless retainer	resin retainer				D mm	tolerance* μm
—	SM10G-OP	—	SMS10G-OP	3	10	0	19	0
SM 12-OP	SM12G-OP	SMS12-OP	SMS12G-OP	3	12	— 9	21	—13
SM 13-OP	SM13G-OP	SMS13-OP	SMS13G-OP	3	13		23	
SM 16-OP	SM16G-OP	SMS16-OP	SMS16G-OP	3	16		28	
SM 20-OP	SM20G-OP	SMS20-OP	SMS20G-OP	4	20	0	32	0
SM 25-OP	SM25G-OP	SMS25-OP	SMS25G-OP	5	25	—10	40	—16
SM 30-OP	SM30G-OP	SMS30-OP	SMS30G-OP	5	30		45	
SM 35-OP	SM35G-OP	SMS35-OP	SMS35G-OP	5	35	0	52	0
SM 40-OP	SM40G-OP	SMS40-OP	SMS40G-OP	5	40	—12	60	—19
SM 50-OP	SM50G-OP	SMS50-OP	SMS50G-OP	5	50		80	
SM 60-OP	SM60G-OP	SMS60-OP	SMS60G-OP	5	60	0	90	0
SM 80-OP	SM80G-OP	—	—	5	80	—15	120	—22
SM100-OP	—	—	—	5	100	0	150	0
SM120-OP	—	—	—	6	120	—20	180	—25
SM150-OP	—	—	—	6	150	0/-25	210	0/-29

* Accuracy is measured prior to machining open slit.

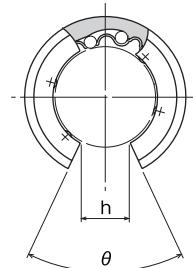
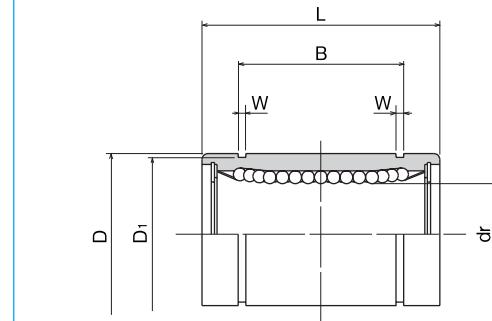


L mm	tolerance mm	B mm	tolerance mm	W mm	D1 mm	h mm	θ	eccentricity* μm	basic load rating dynamic C N	static Co N	mass g	shaft diameter mm
29	0 —0.2	22	0 —0.2	1.3	18	6.8	80°	12	372	549	23	10
30		23		1.3	20	8	80°		510	784	32	12
32		23		1.3	22	9	80°		510	784	37	13
37		26.5		1.6	27	11	80°		774	1,180	58	16
42	30.5	30.5	1.6	30.5	11	60°			882	1,370	79	20
59	0 —0.3	41	0 —0.3	1.85	38	12	50°	15	980	1,570	203	25
64		44.5		1.85	43	15	50°		1,570	2,740	228	30
70		49.5		2.1	49	17	50°		1,670	3,140	355	35
80		60.5		2.1	57	20	50°		2,160	4,020	546	40
100	0 —0.4	74	0 —0.4	2.6	76.5	25	50°	20	3,820	7,940	1,420	50
110		85		3.15	86.5	30	50°		4,700	10,000	1,650	60
140		105.5		4.15	116	40	50°		7,350	16,000	3,750	80
175		125.5		4.15	145	50	50°		14,100	34,800	7,200	100
200	—0.4	158.6	—0.4	4.15	175	85	80°	30	16,400	40,000	11,600	120
240		170.6		5.15	204	105	80°		21,100	54,300	15,700	150

1N=0.102kgf

SM-G-L TYPE

— Long Type —

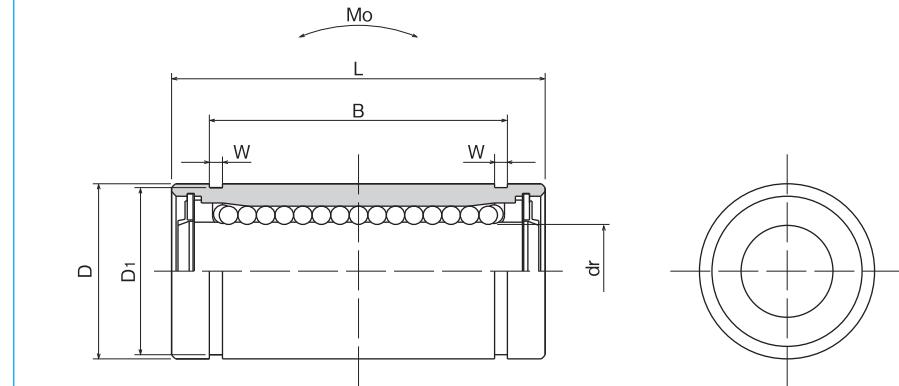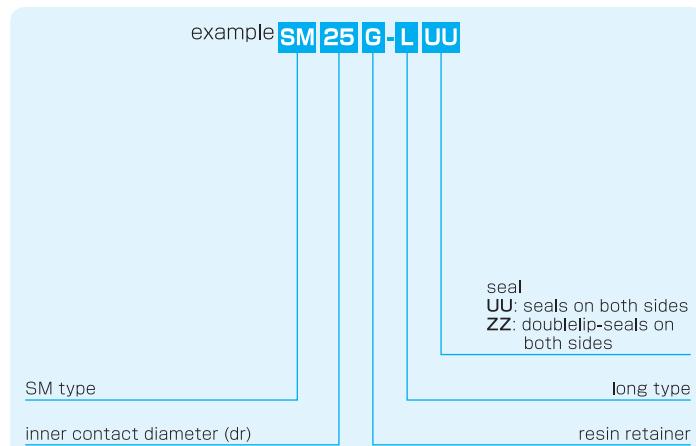**part number structure**

part number*	number of ball circuits	mm	dr tolerance μm	major dimensions			
				D tolerance μm	L tolerance mm	B tolerance mm	
SM 6G-LUU	4	6	0 -10	12	0	26	20.5
SM 8G-LUU	4	8		15	-13	32	25.5
SM10G-LUU	4	10		19		39	32
SM12G-LUU	4	12		21	0	41	34
SM13G-LUU	4	13		23	-16	45	36
SM16G-LUU	4	16		28		53	42
SM20G-LUU	5	20		32	0	59	47.5
SM25G-LUU	6	25		40	-19	83	69
SM30G-LUU	6	30		45		90	75
							-0.3

* Seals-on-both-sides is standard.

W mm	D ₁ mm	eccentricity μm	basic load rating		allowable static moment Mo N·m	mass g	shaft diameter mm
			dynamic C N	static Co N			
1.1	11.5	15	262	476	1.15	10	6
1.1	14.3		352	615	1.94	19	8
1.3	18		493	1,000	3.98	38	10
1.3	20		637	1,430	6.26	43	12
1.3	22		682	1,560	7.68	62	13
1.6	27		1,039	2,350	13.2	99	16
1.6	30.5	20	1,160	2,740	17.9	125	20
1.85	38		1,300	2,960	27.2	315	25
1.85	43		2,160	5,880	61.3	347	30

1N ≈ 0.102kgf 1N · m ≈ 0.102kgf · m

SM-W TYPE

— Double-Wide Type —





part number structure

example	SMS	25	G	W	UU
specification					
SM: standard					
SMS: anti-corrosion					
inner contact diameter (dr)					
retainer material					
blank: standard/steel					
anti-corrosion/stainless steel					
G: resin					
double-wide type					

Doublelip-seal is available for size 6 to 30.

part number		standard		anti-corrosion		number of ball circuits	dr mm	tolerance μm	major dimensions	
steel retainer	resin retainer	stainless retainer	resin retainer	mm	mm				D mm	tolerance μm
SM 3W	SM 3GW	SMS 3W	SMS 3GW	4	3			0	7	0
SM 4W	SM 4GW	SMS 4W	SMS 4GW	4	4			-10	8	-11
SM 5W	SM 5GW	SMS 5W	SMS 5GW	4	5				10	
SM 6W	SM 6GW	SMS 6W	SMS 6GW	4	6				12	0
SM 8W	SM 8GW	SMS 8W	SMS 8GW	4	8				15	-13
SM10W	SM10GW	SMS10W	SMS10GW	4	10				19	
SM12W	SM12GW	SMS12W	SMS12GW	4	12				21	0
SM13W	SM13GW	SMS13W	SMS13GW	4	13				23	-16
SM16W	SM16GW	SMS16W	SMS16GW	4	16				28	
SM20W	SM20GW	SMS20W	SMS20GW	5	20			0	32	0
SM25W	SM25GW	SMS25W	SMS25GW	6	25			-12	40	-19
SM30W	SM30GW	SMS30W	SMS30GW	6	30				45	
SM35W	SM35GW	SMS35W	SMS35GW	6	35			0	52	0
SM40W	SM40GW	SMS40W	SMS40GW	6	40			-15	60	-22
SM50W	SM50GW	SMS50W	SMS50GW	6	50				80	
SM60W	SM60GW	SMS60W	SMS60GW	6	60	0/-20	90	0/-25		

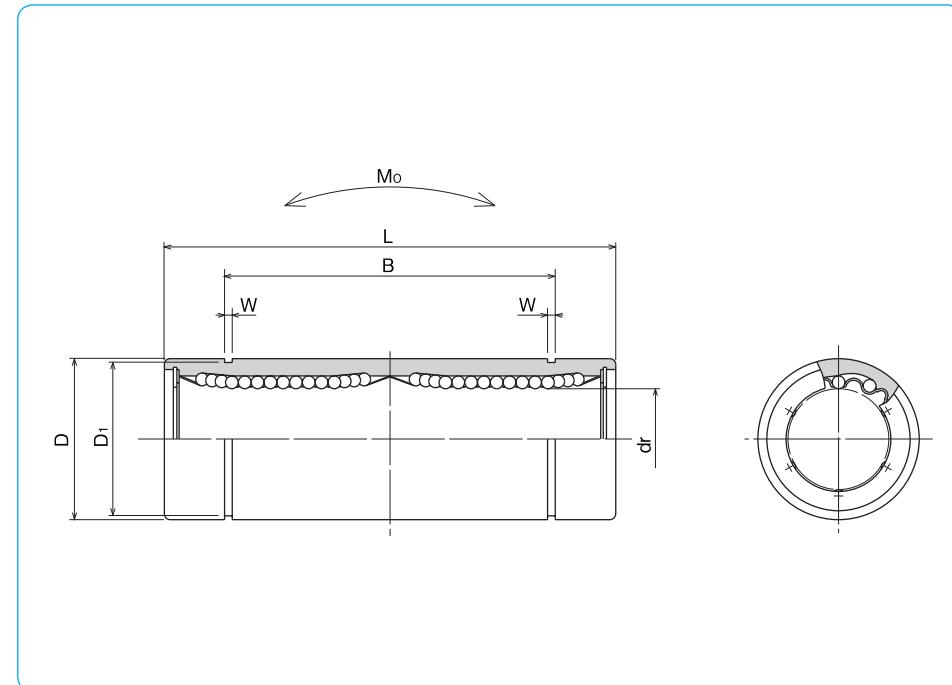

L mm	B mm	W mm	D1 mm	eccentricity μm	basic load rating dynamic C N	basic load rating static Co N	allowable static moment Mo N · m	mass g	shaft diameter mm
0	0	0	0	0	138	210	0.51	3.2	3
					176	254	0.63	4.8	4
					265	412	1.38	11	5
					323	530	2.18	16	6
					431	784	4.31	31	8
					588	1,100	7.24	62	10
-0.3	-0.3	-0.3	-0.3	-0.3	813	1,570	10.9	80	12
					813	1,570	11.6	90	13
					1,230	2,350	19.7	145	16
					1,400	2,740	26.8	180	20
					1,560	3,140	43.4	440	25
					2,490	5,490	82.8	480	30
0	0	0	0	-0.4	2,650	6,270	110	795	35
					3,430	8,040	147	1,170	40
					6,080	15,900	397	3,100	50
					7,550	20,000	530	3,500	60

1N ≈ 0.102kgf 1N · m ≈ 0.102kgf · m

SMF TYPE

— Round Flange Type —


**part number structure**example **SMSF 25 G UU-SK**specification
SMF: standard
SMSF: anti-corrosion

inner contact diameter (dr)

retainer material
blank: standard/steel
anti-corrosion/stainless steel
G: resinouter cylinder
surface treatment
blank: no surface treatment
SK: electroless nickel plating
LF: low temperature black chrome
treatment with fluoride coating
SB: black oxide (not available on
anti-corrosion type)
SC: industrial chrome platingseal
blank: without seal
UU: seals on both sides
ZZ: doublelip-seals on both sides

Doublelip-seal is available for size 6 to 30.

part number		standard		anti-corrosion		number of ball circuits	dr mm	tolerance μm	major dimensions		
steel retainer	resin retainer	stainless retainer	resin retainer	D mm	tolerance μm				L ± 0.3 mm		
SMF 6	SMF 6G	SMSF 6	SMSF 6G	4	6		12	0	19		
SMF 8s	SMF 8sG	SMSF 8s	SMSF 8sG	4	8		15	-13	17		
SMF 8	SMF 8G	SMSF 8	SMSF 8G	4	8		15		24		
SMF 10	SMF10G	SMSF10	SMSF10G	4	10		19		29		
SMF 12	SMF12G	SMSF12	SMSF12G	4	12		21	0	30		
SMF 13	SMF13G	SMSF13	SMSF13G	4	13		23	-16	32		
SMF 16	SMF16G	SMSF16	SMSF16G	4	16		28		37		
SMF 20	SMF20G	SMSF20	SMSF20G	5	20		32	0	42		
SMF 25	SMF25G	SMSF25	SMSF25G	6	25		40	-10	59		
SMF 30	SMF30G	SMSF30	SMSF30G	6	30		45	-19	64		
SMF 35	SMF35G	SMSF35	SMSF35G	6	35		52		70		
SMF 40	SMF40G	SMSF40	SMSF40G	6	40		60	0	80		
SMF 50	SMF50G	SMSF50	SMSF50G	6	50		80	-12	100		
SMF 60	SMF60G	SMSF60	SMSF60G	6	60	0	90	0	110		
SMF 80	—	—	—	6	80	-15	120	-25	140		
SMF100	—	—	—	6	100	0/-20	150	0/-29	175		

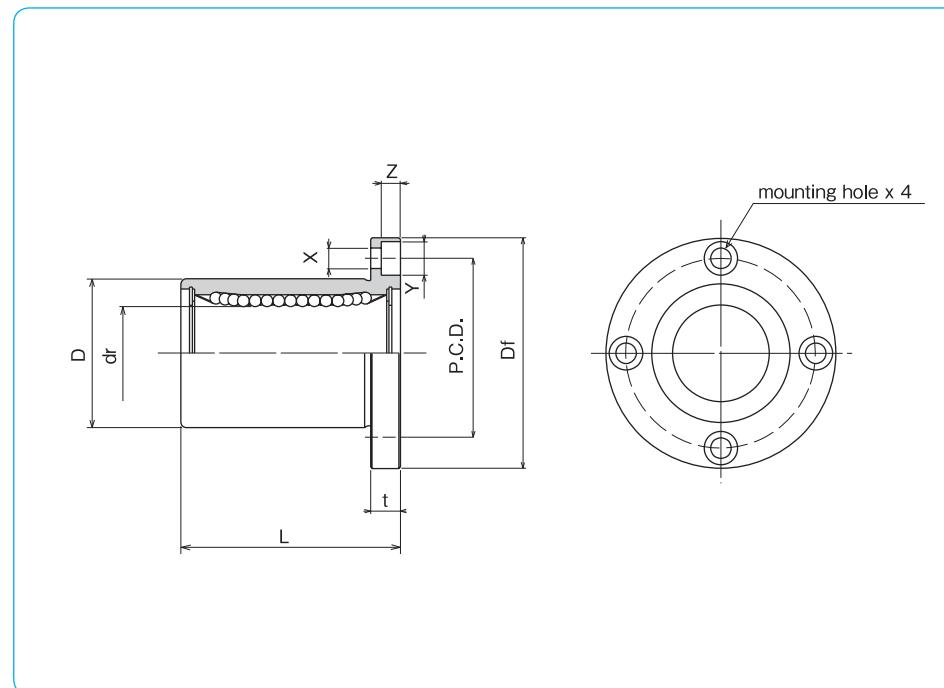

Df mm	t mm	flange P.C.D. mm	X×Y×Z mm	eccentricity μm	perpendicularity μm	basic load rating		mass g	shaft diameter mm
						dynamic C N	static Co N		
12	5	20	3.5×6×3.1	12	12	206	265	24	6
	5	24	3.5×6×3.1			176	216	32	8
	5	24	3.5×6×3.1			274	392	37	8
	6	29	4.5×7.5×4.1			372	549	72	10
	6	32	4.5×7.5×4.1			510	784	76	12
	6	33	4.5×7.5×4.1			510	784	88	13
	6	38	4.5×7.5×4.1			774	1,180	120	16
	8	43	5.5×9×5.1			882	1,370	180	20
15	8	51	5.5×9×5.1	15	15	980	1,570	340	25
	10	60	6.6×11×6.1			1,570	2,740	470	30
	10	67	6.6×11×6.1			1,670	3,140	650	35
	13	78	9×14×8.1			2,160	4,020	1,060	40
20	13	98	9×14×8.1	20	20	3,820	7,940	2,200	50
	18	112	11×17×11.1			4,700	10,000	3,000	60
	18	142	11×17×11.1			7,350	16,000	5,800	80
	20	175	14×20×13.1			14,100	34,800	10,600	100

1N=0.102kgf

SMK TYPE

— Square Flange Type —


**part number structure**example **SMSK 25 G UU-SK**specification
SMK: standard
SMSK: anti-corrosion

inner contact diameter (dr)

retainer material
blank: standard/steel
anti-corrosion/stainless steel
G: resinouter cylinder surface treatment
blank: no surface treatment
SK: electroless nickel plating
LF: low temperature black chrome treatment with fluoride coating
SB: black oxide (not available on anti-corrosion type)
SC: industrial chrome platingseal
blank: without seal
UU: seals on both sides
ZZ: doublelip-seals on both sides

Doublelip-seal is available for size 6 to 30.

part number		standard		anti-corrosion		number of ball circuits	dr tolerance	major dimensions	
steel retainer	resin retainer	stainless retainer	resin retainer	mm	μm			mm	μm
SMK 6	SMK 6G	SMSK 6	SMSK 6G	4	6	12	0	19	
SMK 8s	SMK 8sG	SMSK 8s	SMSK 8sG	4	8	15	-13	17	
SMK 8	SMK 8G	SMSK 8	SMSK 8G	4	8	15		24	
SMK 10	SMK10G	SMSK10	SMSK10G	4	10	19		29	
SMK 12	SMK12G	SMSK12	SMSK12G	4	12	21	0	30	
SMK 13	SMK13G	SMSK13	SMSK13G	4	13	23	-16	32	
SMK 16	SMK16G	SMSK16	SMSK16G	4	16	28		37	
SMK 20	SMK20G	SMSK20	SMSK20G	5	20	32	0	42	
SMK 25	SMK25G	SMSK25	SMSK25G	6	25	40	-10	59	
SMK 30	SMK30G	SMSK30	SMSK30G	6	30	45	-19	64	
SMK 35	SMK35G	SMSK35	SMSK35G	6	35	52		70	
SMK 40	SMK40G	SMSK40	SMSK40G	6	40	60	0	80	
SMK 50	SMK50G	SMSK50	SMSK50G	6	50	80	-12	100	
SMK 60	SMK60G	SMSK60	SMSK60G	6	60	90	0	110	
SMK 80	—	—	—	6	80	120	-15	140	
SMK100	—	—	—	6	100	150	0/-20	175	0/-29

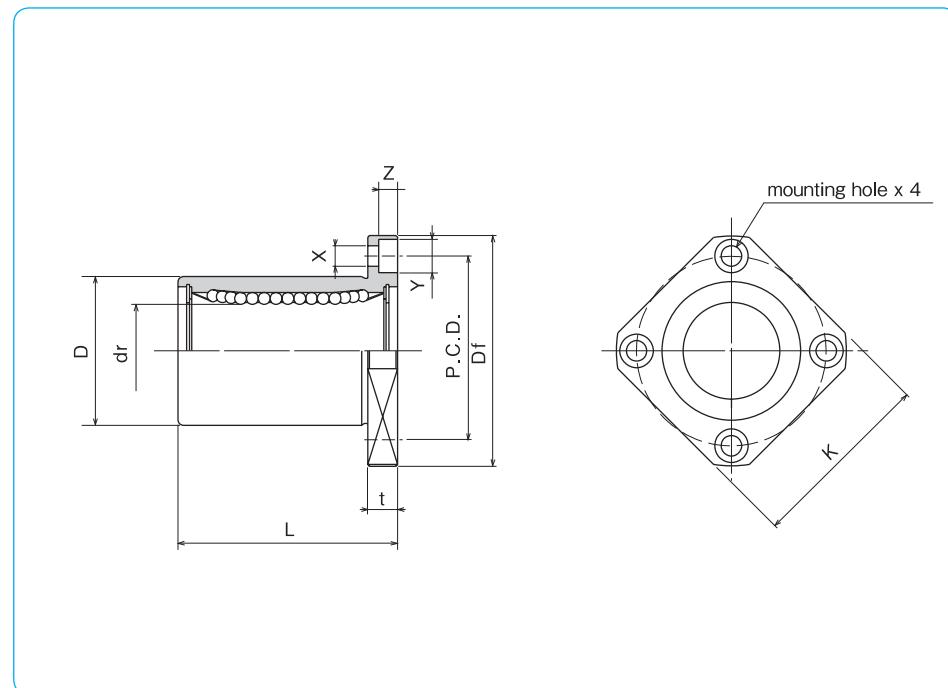

Df mm	K mm	t mm	flange P.C.D. mm			X×Y×Z mm	eccentricity μm	perpendicularity μm	basic load rating dynamic C N	basic load rating static Co N	mass g	shaft diameter mm
			3.5×6×3.1	3.5×6×3.1	3.5×6×3.1							
28	22	5	20	3.5×6×3.1	12	3.5×6×3.1	12	12	206	265	18	6
32	25	5	24	3.5×6×3.1		3.5×6×3.1			176	216	24	8
32	25	5	24	3.5×6×3.1		3.5×6×3.1			274	392	29	8
40	30	6	29	4.5×7.5×4.1		4.5×7.5×4.1			372	549	52	10
42	32	6	32	4.5×7.5×4.1		4.5×7.5×4.1			510	784	57	12
43	34	6	33	4.5×7.5×4.1		4.5×7.5×4.1			510	784	72	13
48	37	6	38	4.5×7.5×4.1		4.5×7.5×4.1			774	1,180	104	16
54	42	8	43	5.5×9×5.1	15	5.5×9×5.1	15	15	882	1,370	145	20
62	50	8	51	5.5×9×5.1		5.5×9×5.1			980	1,570	300	25
74	58	10	60	6.6×11×6.1		6.6×11×6.1			1,570	2,740	375	30
82	64	10	67	6.6×11×6.1		6.6×11×6.1			1,670	3,140	560	35
96	75	13	78	9×14×8.1	20	9×14×8.1	20	20	2,160	4,020	880	40
116	92	13	98	9×14×8.1		9×14×8.1			3,820	7,940	2,000	50
134	106	18	112	11×17×11.1		11×17×11.1			4,700	10,000	2,560	60
164	136	18	142	11×17×11.1	25	11×17×11.1	25	25	7,350	16,000	5,300	80
200	170	20	175	14×20×13.1		14×20×13.1			14,100	34,800	9,900	100

1N=0.102kgf

SMT TYPE

— Two Side Cut Flange Type —



part number structure

example **SMST 25 G UU-SK**


specification
SMT: standard
SMST: anti-corrosion

inner contact diameter (dr)

retainer material
blank: standard/steel
anti-corrosion/stainless steel
G: resin

outer cylinder surface treatment
blank: no surface treatment
SK: electroless nickel plating
LF: low temperature black chrome treatment with fluoride coating
SB: black oxide (not available on anti-corrosion type)
SC: industrial chrome plating

seal
UU: seals on both sides
ZZ: doublelip-seals on both sides

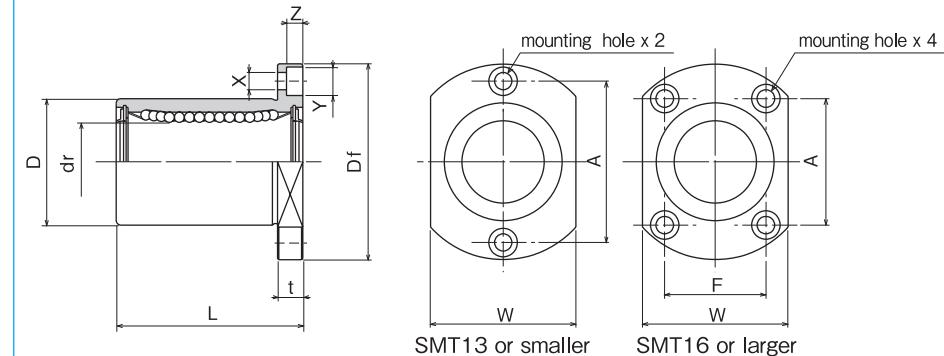

SMT13 or smaller

SMT16 or larger

standard		part number*		number of ball circuits	dr tolerance	major dimensions		
steel retainer	resin retainer	anti-corrosion	stainless retainer			mm	μm	D tolerance
SMT 6UU	SMT 6GUU	SMST 6UU	SMST 6GUU	4	6	12	0	19
SMT 8UU	SMT 8GUU	SMST 8UU	SMST 8GUU	4	8	15	-13	24
SMT10UU	SMT10GUU	SMST10UU	SMST10GUU	4	10	19		29
SMT12UU	SMT12GUU	SMST12UU	SMST12GUU	4	12	21	0	30
SMT13UU	SMT13GUU	SMST13UU	SMST13GUU	4	13	23	-16	32
SMT16UU	SMT16GUU	SMST16UU	SMST16GUU	4	16	28		37
SMT20UU	SMT20GUU	SMST20UU	SMST20GUU	5	20	32	0	42
SMT25UU	SMT25GUU	SMST25UU	SMST25GUU	6	25	40	-10	59
SMT30UU	SMT30GUU	SMST30UU	SMST30GUU	6	30	45	-19	64

* Seals-on-both-sides is standard.

Df mm	W mm	t mm	flange			X×Y×Z mm	eccentricity μm	perpendicularity μm	basic load rating dynamic C N	basic load rating static Co N	mass g	shaft diameter mm
			A mm	F mm	X×Y×Z mm							
28	18	5	20	—	3.5×6×3.1	12	12	206	265	21	6	
32	21	5	24	—	3.5×6×3.1			274	392	33	8	
40	25	6	29	—	4.5×7.5×4.1			372	549	64	10	
42	27	6	32	—	4.5×7.5×4.1			510	784	68	12	
43	29	6	33	—	4.5×7.5×4.1			510	784	81	13	
48	34	6	31	22	4.5×7.5×4.1			774	1,180	112	16	
54	38	8	36	24	5.5×9×5.1	15	15	882	1,370	167	20	
62	46	8	40	32	5.5×9×5.1			980	1,570	325	25	
74	51	10	49	35	6.6×11×6.1			1,570	2,740	388	30	

1N ≈ 0.102kgf

SMF-E TYPE

— Round Flange Type with Pilot End —




part number structure

example	SMSF	25	G	UU	-E	-SK
specification						
SMF: standard						
SMSF: anti-corrosion						
inner contact diameter (dr)						
retainer material						
blank: standard/steel						
anti-corrosion/stainless steel						
G: resin						
with pilot end						
seal						
UU: seals on both sides						
ZZ: doublelip-seals on both sides						

Doublelip-seal is available for size 6 to 30.

part number*		standard		anti-corrosion		number of ball circuits	dr tolerance mm	major dimensions		
steel retainer	resin retainer	stainless retainer	resin retainer	mm	μm			D tolerance μm	L ±0.3 mm	
SMF 6UU-E	SMF 6GUU-E	SMSF 6UU-E	SMSF 6GUU-E	4	6	12	0	19		
SMF 8UU-E	SMF 8GUU-E	SMSF 8UU-E	SMSF 8GUU-E	4	8	15	-13	24		
SMF10UU-E	SMF10GUU-E	SMSF10UU-E	SMSF10GUU-E	4	10	19		29		
SMF12UU-E	SMF12GUU-E	SMSF12UU-E	SMSF12GUU-E	4	12	21	0	30		
SMF13UU-E	SMF13GUU-E	SMSF13UU-E	SMSF13GUU-E	4	13	23	-16	32		
SMF16UU-E	SMF16GUU-E	SMSF16UU-E	SMSF16GUU-E	4	16	28		37		
SMF20UU-E	SMF20GUU-E	SMSF20UU-E	SMSF20GUU-E	5	20	32	0	42		
SMF25UU-E	SMF25GUU-E	SMSF25UU-E	SMSF25GUU-E	6	25	40	-10	59		
SMF30UU-E	SMF30GUU-E	SMSF30UU-E	SMSF30GUU-E	6	30	45		64		
SMF35UU-E	SMF35GUU-E	—	—	6	35	52	0	70		
SMF40UU-E	SMF40GUU-E	—	—	6	40	60	-12	80		
SMF50UU-E	SMF50GUU-E	—	—	6	50	80		100		
SMF60UU-E	SMF60GUU-E	—	—	6	60	90	0/-15	110		

* Seals-on-both-sides is standard.

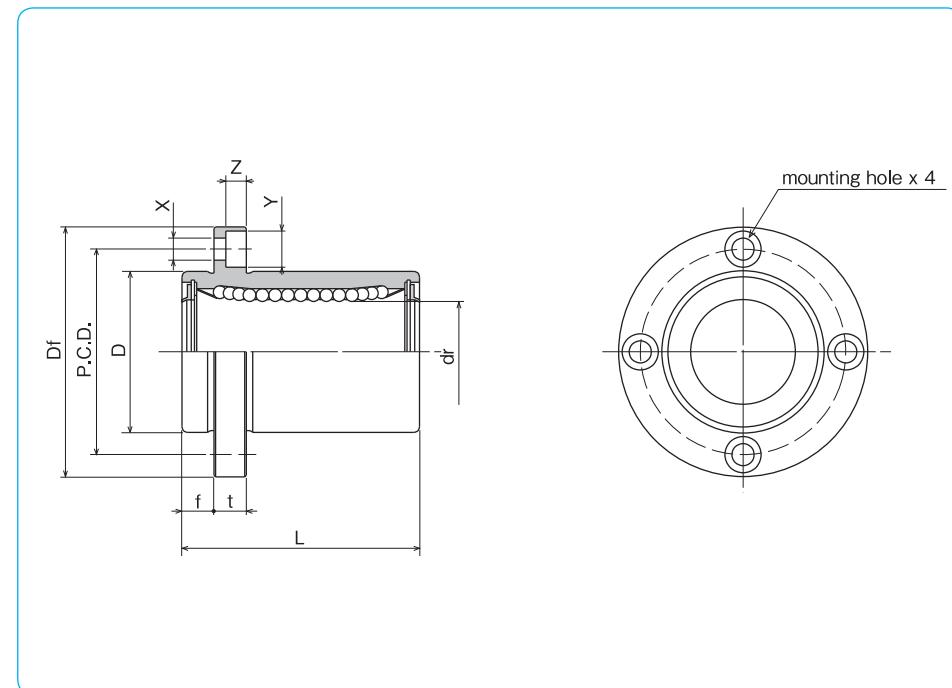

f mm	Df mm	t mm	flange P.C.D. mm	X×Y×Z mm	eccentricity μm	perpendicularity μm	basic load rating dynamic C N	basic load rating static Co N	mass g	shaft diameter mm
5	28	5	20	3.5×6×3.1	12	12	206	265	24	6
5	32	5	24	3.5×6×3.1			274	392	37	8
6	40	6	29	4.5×7.5×4.1			372	549	72	10
6	42	6	32	4.5×7.5×4.1			510	784	76	12
6	43	6	33	4.5×7.5×4.1			510	784	88	13
6	48	6	38	4.5×7.5×4.1			774	1,180	120	16
8	54	8	43	5.5×9×5.1	15	15	882	1,370	180	20
8	62	8	51	5.5×9×5.1			980	1,570	340	25
10	74	10	60	6.6×11×6.1			1,570	2,740	470	30
10	82	10	67	6.6×11×6.1	20	20	1,670	3,140	650	35
13	96	13	78	9×14×8.1			2,160	4,020	1,060	40
13	116	13	98	9×14×8.1			3,820	7,940	2,200	50
18	134	18	112	11×17×11.1	25	25	4,700	10,000	3,000	60

1N ≈ 0.102kgf

SMK-E TYPE

— Square Flange Type with Pilot End —




part number structure

example	SMSK 25 G UU - E - SK
specification	
SMK: standard	
SMSK: anti-corrosion	
inner contact diameter (dr)	
retainer material	
blank: standard/steel	
anti-corrosion/stainless steel	
G: resin	
seal	with pilot end
UU: seals on both sides	
ZZ: doublelip-seals on both sides	

Doublelip-seal is available for size 6 to 30.

part number*		standard		anti-corrosion		number of ball circuits	dr tolerance mm	major dimensions		
steel retainer	resin retainer	stainless retainer	resin retainer	mm	μm			D tolerance mm	μm	L ±0.3 mm
SMK 6UU-E	SMK 6GUU-E	SMSK 6UU-E	SMSK 6GUU-E	4	6	12	0	19		
SMK 8UU-E	SMK 8GUU-E	SMSK 8UU-E	SMSK 8GUU-E	4	8	15	-13	24		
SMK10UU-E	SMK10GUU-E	SMSK10UU-E	SMSK10GUU-E	4	10	19		29		
SMK12UU-E	SMK12GUU-E	SMSK12UU-E	SMSK12GUU-E	4	12	21	0	30		
SMK13UU-E	SMK13GUU-E	SMSK13UU-E	SMSK13GUU-E	4	13	23	-16	32		
SMK16UU-E	SMK16GUU-E	SMSK16UU-E	SMSK16GUU-E	4	16	28		37		
SMK20UU-E	SMK20GUU-E	SMSK20UU-E	SMSK20GUU-E	5	20	32	0	42		
SMK25UU-E	SMK25GUU-E	SMSK25UU-E	SMSK25GUU-E	6	25	40	-19	59		
SMK30UU-E	SMK30GUU-E	SMSK30UU-E	SMSK30GUU-E	6	30	45		64		
SMK35UU-E	SMK35GUU-E	—	—	6	35	52	0	70		
SMK40UU-E	SMK40GUU-E	—	—	6	40	60	-22	80		
SMK50UU-E	SMK50GUU-E	—	—	6	50	80		100		
SMK60UU-E	SMK60GUU-E	—	—	6	60	0/-15	90	0/-25	110	

* Seals-on-both-sides is standard.

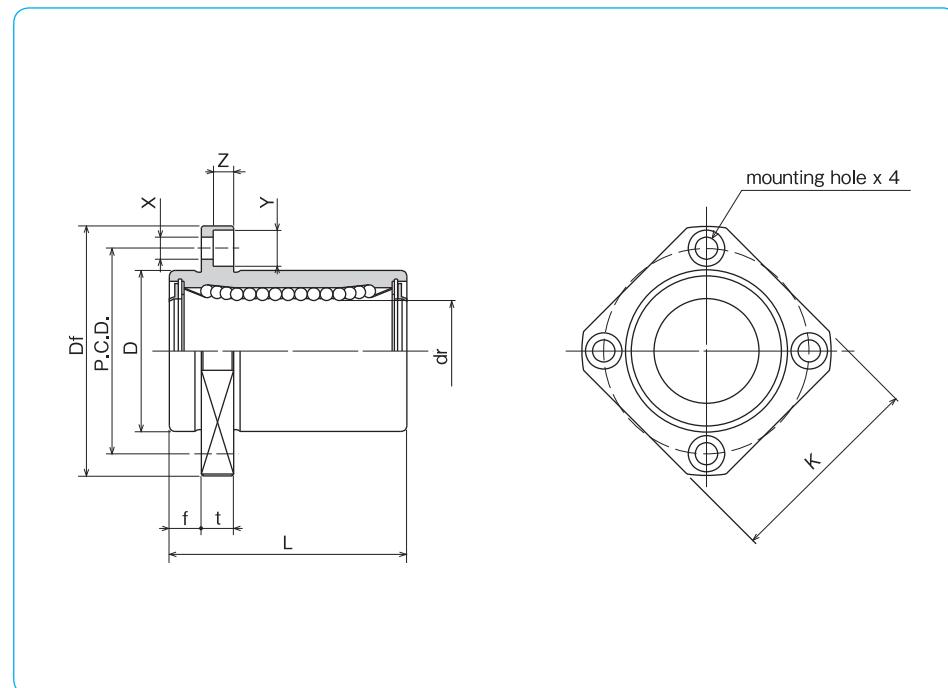

f mm	Df mm	K mm	t mm	P.C.D. mm	X×Y×Z mm	eccentricity μm	perpendicularity μm	basic load rating		mass g	shaft diameter mm
								dynamic C N	static Co N		
5	28	22	5	20	3.5×6×3.1	12	12	206	265	18	6
5	32	25	5	24	3.5×6×3.1			274	392	29	8
6	40	30	6	29	4.5×7.5×4.1			372	549	52	10
6	42	32	6	32	4.5×7.5×4.1			510	784	57	12
6	43	34	6	33	4.5×7.5×4.1			510	784	72	13
6	48	37	6	38	4.5×7.5×4.1			774	1,180	104	16
8	54	42	8	43	5.5×9×5.1	15	15	882	1,370	145	20
8	62	50	8	51	5.5×9×5.1			980	1,570	300	25
10	74	58	10	60	6.6×11×6.1			1,570	2,740	375	30
10	82	64	10	67	6.6×11×6.1	20	20	1,670	3,140	560	35
13	96	75	13	78	9×14×8.1			2,160	4,020	880	40
13	116	92	13	98	9×14×8.1			3,820	7,940	2,000	50
18	134	106	18	112	11×17×11.1			4,700	10,000	2,560	60

1N ≈ 0.102kgf

SMT-E TYPE

— Two Side Cut Pilot End Flange Type —



part number structure

example **SMST|25|G|UU-E-SK**

specification
SMT: standard
SMST: anti-corrosion


inner contact diameter (dr)

retainer material
blank: standard/steel
anti-corrosion/stainless steel
G: resin

outer cylinder
surface treatment
blank: no surface treatment
SK: electroless nickel plating
LF: low temperature black chrome
treatment with fluoride coating
SB: black oxide (not available on
anti-corrosion type)
SC: industrial chrome plating

with pilot end

seal
UU: seals on both sides
ZZ: doublelip-seals on both sides

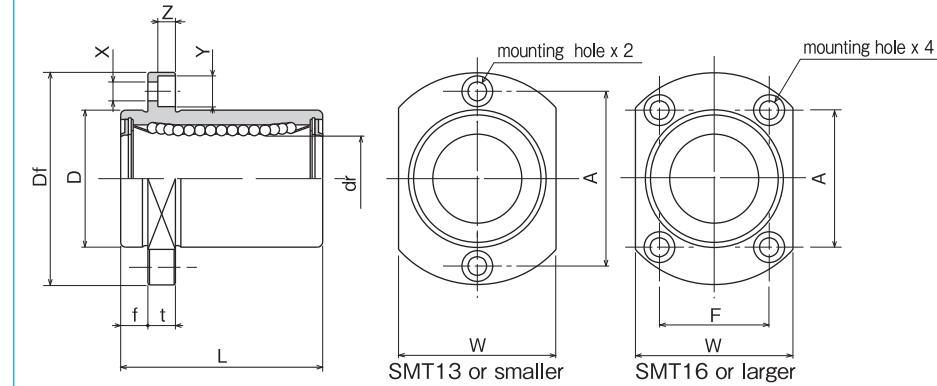

standard		part number*		number of ball circuits	dr tolerance	major dimensions			
steel retainer	resin retainer	anti-corrosion	stainless retainer			resin retainer	mm	μm	mm
SMT 6UU-E	SMT 6GUU-E	SMST 6UU-E	SMST 6GUU-E	4	0 - 9	12	0	19	
SMT 8UU-E	SMT 8GUU-E	SMST 8UU-E	SMST 8GUU-E			15	-13	24	
SMT10UU-E	SMT10GUU-E	SMST10UU-E	SMST10GUU-E			19		29	
SMT12UU-E	SMT12GUU-E	SMST12UU-E	SMST12GUU-E			21	0	30	
SMT13UU-E	SMT13GUU-E	SMST13UU-E	SMST13GUU-E			23	-16	32	
SMT16UU-E	SMT16GUU-E	SMST16UU-E	SMST16GUU-E			28		37	
SMT20UU-E	SMT20GUU-E	SMST20UU-E	SMST20GUU-E	5	20	32	0	42	
SMT25UU-E	SMT25GUU-E	SMST25UU-E	SMST25GUU-E	6	25	40	-10	59	
SMT30UU-E	SMT30GUU-E	SMST30UU-E	SMST30GUU-E	6	30	45	-19	64	

* Seals-on-both-sides is standard.

f mm	Df mm	W mm	t mm	flange		X×Y×Z mm	eccentricity μm	perpendicularity μm	basic load rating dynamic C N	static Co N	mass g	shaft diameter mm
				A mm	F mm							
5	28	18	5	20	—	3.5×6×3.1	12	12	206	265	21	6
5	32	21	5	24	—	3.5×6×3.1			274	392	33	8
6	40	25	6	29	—	4.5×7.5×4.1			372	549	64	10
6	42	27	6	32	—	4.5×7.5×4.1			510	784	68	12
6	43	29	6	33	—	4.5×7.5×4.1			510	784	81	13
6	48	34	6	31	22	4.5×7.5×4.1			774	1,180	112	16
8	54	38	8	36	24	5.5×9×5.1	15	15	882	1,370	167	20
8	62	46	8	40	32	5.5×9×5.1			980	1,570	325	25
10	74	51	10	49	35	6.6×11×6.1			1,570	2,740	388	30

1N ≈ 0.102kgf

SMK-G-L TYPE

— Square Flange Long type —

**part number structure**example **SMK|25|G-L|UU-SK**

SMK type

inner contact diameter (dr)

resin retainer


outer cylinder surface treatment
blank: no surface treatment
SK: electroless nickel plating
LF: low temperature black chrome treatment with fluoride coating
SB: black oxide (not available on anti-corrosion type)
SC: industrial chrome plating

seal
UU: seals on both sides
ZZ: doublelip-seals on both sides

long type

part number*	number of ball circuits	dr tolerance mm	D tolerance μm	major dimensions			flange		
				L ±0.3 mm	Df mm	K mm	t mm	P.C.D. mm	
SMK 6G-LUU	4	6	12	0	26	28	22	5	20
SMK 8G-LUU	4	8	15	-13	32	32	25	5	24
SMK10G-LUU	4	10	19	0	39	40	30	6	29
SMK12G-LUU	4	12	21	0	41	42	32	6	32
SMK13G-LUU	4	13	23	-16	45	43	34	6	33
SMK16G-LUU	4	16	28		53	48	37	6	38
SMK20G-LUU	5	20	32	0	59	54	42	8	43
SMK25G-LUU	6	25	40	-12	83	62	50	8	51
SMK30G-LUU	6	30	45	-19	90	74	58	10	60

* Seals-on-both-sides is standard.

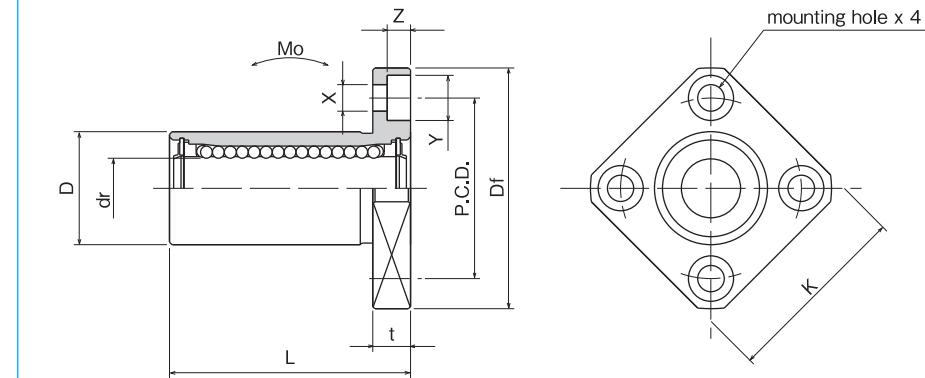

X×Y×Z mm	eccentricity μm	perpendicularity μm	basic load rating dynamic C N	static Co N	allowable static moment Mo N·m	mass g	shaft diameter mm
3.5×6×3.1	15	15	262	476	1.15	20	6
3.5×6×3.1			352	615	1.94	32	8
4.5×7.5×4.1			493	1,000	3.98	59	10
4.5×7.5×4.1			637	1,430	6.26	67	12
4.5×7.5×4.1			682	1,560	7.68	88	13
4.5×7.5×4.1			1,039	2,350	13.2	125	16
5.5×9×5.1	20	20	1,160	2,740	17.9	170	20
5.5×9×5.1			1,300	2,960	27.2	380	25
6.6×11×6.1			2,160	5,880	61.3	460	30

1N ≈ 0.102kgf 1N · m ≈ 0.102kgf · m

SMF-W TYPE

— Round Flange Double-Wide Type —

**part number structure**


example	SMSF	25	G	W	UU	-SK
specification	SMF:	standard				
	SMSF:	anti-corrosion				
inner contact diameter (dr)						
retainer material	blank:	standard/steel				
		anti-corrosion/stainless steel				
G: resin						
double-wide type						

outer cylinder surface treatment
blank: no surface treatment
SK: electroless nickel plating
LF: low temperature black chrome treatment with fluoride coating
SB: black oxide (not available on anti-corrosion type)
SC: industrial chrome plating

seal
blank: without seal
UU: seals on both sides
ZZ: doublelip-seals on both sides

Doublelip-seal is available for size 6 to 30.

part number		standard		anti-corrosion		number of ball circuits	dr tolerance mm	major dimensions		
steel retainer	resin retainer	stainless retainer	resin retainer	mm	μm			D tolerance mm	μm	L ±0.3 mm
SMF 6W	SMF 6GW	SMSF 6W	SMSF 6GW	4	6	12	0	35		
SMF 8W	SMF 8GW	SMSF 8W	SMSF 8GW	4	8	15	-13	45		
SMF10W	SMF10GW	SMSF10W	SMSF10GW	4	10	19		55		
SMF12W	SMF12GW	SMSF12W	SMSF12GW	4	12	21	0	57		
SMF13W	SMF13GW	SMSF13W	SMSF13GW	4	13	23	-16	61		
SMF16W	SMF16GW	SMSF16W	SMSF16GW	4	16	28		70		
SMF20W	SMF20GW	SMSF20W	SMSF20GW	5	20	32	0	80		
SMF25W	SMF25GW	SMSF25W	SMSF25GW	6	25	40	-19	112		
SMF30W	SMF30GW	SMSF30W	SMSF30GW	6	30	45		123		
SMF35W	SMF35GW	SMSF35W	SMSF35GW	6	35	52	0	135		
SMF40W	SMF40GW	SMSF40W	SMSF40GW	6	40	60	-22	151		
SMF50W	SMF50GW	SMSF50W	SMSF50GW	6	50	80		192		
SMF60W	SMF60GW	SMSF60W	SMSF60GW	6	60	0/-20	90	0/-25	209	

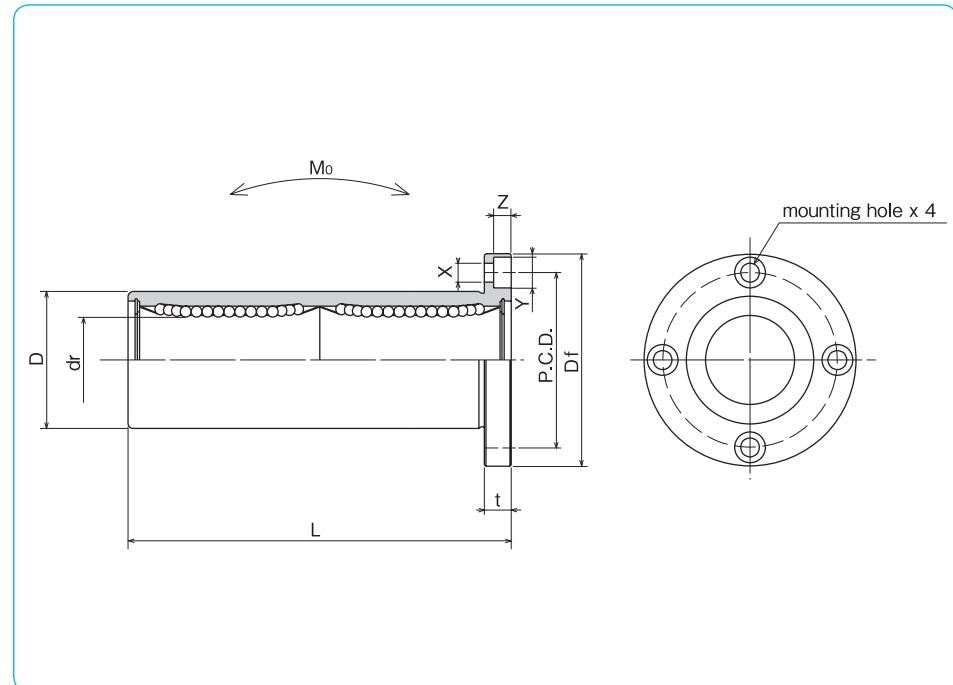

Df mm	t mm	flange P.C.D. mm	X×Y×Z mm	eccentricity μm	perpendicularity μm	basic load rating	allowable static moment Mo N·m	mass g	shaft diameter mm
						dynamic C N			
28	5	20	3.5×6×3.1	15	15	323	530	2.18	31
32	5	24	3.5×6×3.1			431	784	4.31	51
40	6	29	4.5×7.5×4.1			588	1,100	7.24	98
42	6	32	4.5×7.5×4.1			813	1,570	10.9	110
43	6	33	4.5×7.5×4.1			813	1,570	11.6	130
48	6	38	4.5×7.5×4.1			1,230	2,350	19.7	190
54	8	43	5.5×9×5.1	20	20	1,400	2,740	26.8	260
62	8	51	5.5×9×5.1			1,560	3,140	43.4	540
74	10	60	6.6×11×6.1			2,490	5,490	82.8	680
82	10	67	6.6×11×6.1			2,650	6,270	110	1,020
96	13	78	9×14×8.1	25	25	3,430	8,040	147	1,570
116	13	98	9×14×8.1			6,080	15,900	397	3,600
134	18	112	11×17×11.1			7,550	20,000	530	4,500

1N=0.102kgf 1N·m=0.102kgf·m

SMK-W TYPE


— Square Flange Double-Wide Type —

**part number structure**

example	SMSK	25	G	W	UU	-SK
specification						
SMK:	standard					
SMSK:	anti-corrosion					
inner contact diameter (dr)						
retainer material						
blank:	standard/steel					
	anti-corrosion/stainless steel					
G:	resin					
double-wide type						
seal						
blank:	without seal					
UU:	seals on both sides					
ZZ:	doublelip-seals on both sides					

Doublelip-seal is available for size 6 to 30.

part number		standard		anti-corrosion		number of ball circuits	dr tolerance mm	major dimensions		
steel retainer	resin retainer	stainless retainer	resin retainer	mm	μm			D tolerance mm	μm	L ±0.3 mm
SMK 6W	SMK 6GW	SMSK 6W	SMSK 6GW	4	6	12	0	35		
SMK 8W	SMK 8GW	SMSK 8W	SMSK 8GW	4	8	15	-13	45		
SMK10W	SMK10GW	SMSK10W	SMSK10GW	4	10	19		55		
SMK12W	SMK12GW	SMSK12W	SMSK12GW	4	12	21	0	57		
SMK13W	SMK13GW	SMSK13W	SMSK13GW	4	13	23	-16	61		
SMK16W	SMK16GW	SMSK16W	SMSK16GW	4	16	28		70		
SMK20W	SMK20GW	SMSK20W	SMSK20GW	5	20	32	0	80		
SMK25W	SMK25GW	SMSK25W	SMSK25GW	6	25	40	-19	112		
SMK30W	SMK30GW	SMSK30W	SMSK30GW	6	30	45		123		
SMK35W	SMK35GW	SMSK35W	SMSK35GW	6	35	52		135		
SMK40W	SMK40GW	SMSK40W	SMSK40GW	6	40	60	0	151		
SMK50W	SMK50GW	SMSK50W	SMSK50GW	6	50	80	-22	192		
SMK60W	SMK60GW	SMSK60W	SMSK60GW	6	60	90	0/-20	209		

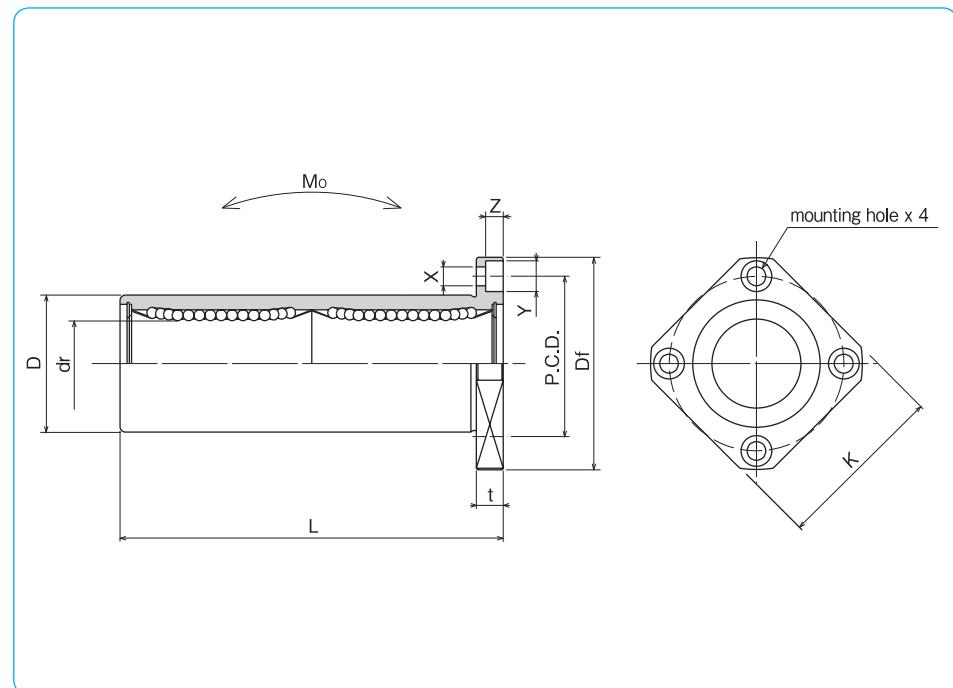

Df mm	K mm	t mm	flange P.C.D. mm			X×Y×Z mm	eccentricity μm	perpendicularity μm	basic load rating		allowable static moment Mo N·m	mass g	shaft diameter mm
			C N	dynamic	static Co N								
28	22	5	20	3.5×6×3.1			15	15	323	530	2.18	25	6
32	25	5	24	3.5×6×3.1					431	784	4.31	43	8
40	30	6	29	4.5×7.5×4.1					588	1,100	7.24	78	10
42	32	6	32	4.5×7.5×4.1					813	1,570	10.9	90	12
43	34	6	33	4.5×7.5×4.1					813	1,570	11.6	108	13
48	37	6	38	4.5×7.5×4.1					1,230	2,350	19.7	165	16
54	42	8	43	5.5×9×5.1			20	20	1,400	2,740	26.8	225	20
62	50	8	51	5.5×9×5.1					1,560	3,140	43.4	500	25
74	58	10	60	6.6×11×6.1					2,490	5,490	82.8	590	30
82	64	10	67	6.6×11×6.1			25	25	2,650	6,270	110	930	35
96	75	13	78	9×14×8.1					3,430	8,040	147	1,380	40
116	92	13	98	9×14×8.1					6,080	15,900	397	3,400	50
134	106	18	112	11×17×11.1					7,550	20,000	530	4,060	60

1N ≈ 0.102kgf 1N · m ≈ 0.102kgf · m


SMT-W TYPE

— Two Side Cut Double-Wide Flange Type —



part number structure

example	SMST	25	G	W	UU	-SK
specification	SMT:	standard				
	SMST:	anti-corrosion				
inner contact diameter (dr)						
retainer material	blank:	standard/steel				
		anti-corrosion/stainless steel				
G: resin						
seal	UU:	seals on both sides				
	ZZ:	doublelip-seals on both sides				
			double-wide type			

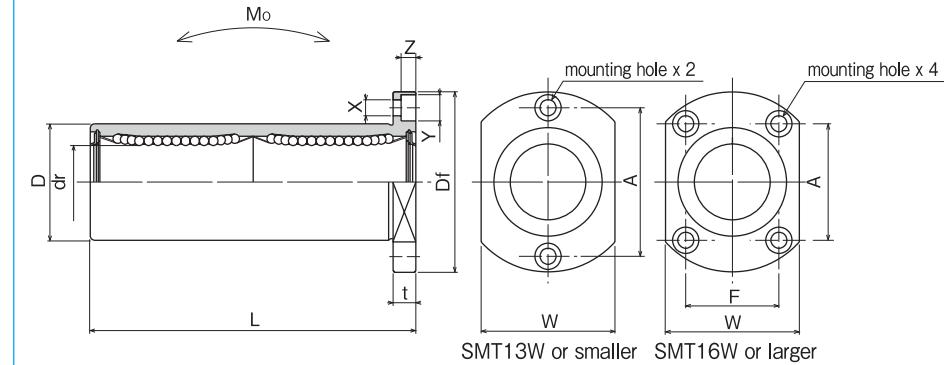

part number*		standard		anti-corrosion		number of ball circuits	dr tolerance	major dimensions		
steel retainer	resin retainer	stainless retainer	resin retainer	mm	μm			mm	tolerance	±0.3 mm
						mm	μm			
SMT 6WUU	SMT 6GWUU	SMST 6WUU	SMST 6GWUU	4	6			12	0	35
SMT 8WUU	SMT 8GWUU	SMST 8WUU	SMST 8GWUU	4	8			15	-13	45
SMT10WUU	SMT10GWUU	SMST10WUU	SMST10GWUU	4	10		0	19		55
SMT12WUU	SMT12GWUU	SMST12WUU	SMST12GWUU	4	12		-10	21	0	57
SMT13WUU	SMT13GWUU	SMST13WUU	SMST13GWUU	4	13			23	-16	61
SMT16WUU	SMT16GWUU	SMST16WUU	SMST16GWUU	4	16			28		70
SMT20WUU	SMT20GWUU	SMST20WUU	SMST20GWUU	5	20		0	32	0	80
SMT25WUU	SMT25GWUU	SMST25WUU	SMST25GWUU	6	25		-12	40	-19	112
SMT30WUU	SMT30GWUU	SMST30WUU	SMST30GWUU	6	30			45		123

* Seals-on-both-sides is standard.

Df mm	W mm	t mm	flange			eccentricity μm	perpendicularity μm	basic load rating dynamic C N	basic load rating static Co N	allowable static moment Mo N·m	mass g	shaft diameter mm
			A mm	F mm	X×Y×Z mm							
28	18	5	20	—	3.5×6×3.1	15	15	323	530	2.18	28	6
32	21	5	24	—	3.5×6×3.1			431	784	4.31	47	8
40	25	6	29	—	4.5×7.5×4.1			588	1,100	7.24	90	10
42	27	6	32	—	4.5×7.5×4.1			813	1,570	10.9	102	12
43	29	6	33	—	4.5×7.5×4.1			813	1,570	11.6	123	13
48	34	6	31	22	4.5×7.5×4.1			1,230	2,350	19.7	182	16
54	38	8	36	24	5.5×9×5.1	20	20	1,400	2,740	26.8	247	20
62	46	8	40	32	5.5×9×5.1			1,560	3,140	43.4	525	25
74	51	10	49	35	6.6×11×6.1			2,490	5,490	82.8	645	30

1N ≈ 0.102kgf 1N · m ≈ 0.102kgf · m

SMFC TYPE


— Center Mount Round Flange Type —

**part number structure**

example	SMSFC 25 G UU-SK	
specification		
SMFC: standard		
SMSFC: anti-corrosion		
inner contact diameter (dr)		
retainer material		
blank: standard/steel		
anti-corrosion/stainless steel		
G: resin		
seal		
blank: without seal		
UU: seals on both sides		
ZZ: doublelip-seals on both sides		

Doublelip-seal is available for size 6 to 30.

part number		standard		anti-corrosion		number of ball circuits	dr tolerance mm	major dimensions		
steel retainer	resin retainer	stainless retainer	resin retainer	mm	μm			D tolerance mm	μm	L ±0.3 mm
SMFC 6	SMFC 6G	SMSFC 6	SMSFC 6G	4	6	12	0	35		
SMFC 8	SMFC 8G	SMSFC 8	SMSFC 8G	4	8	15	-13	45		
SMFC10	SMFC10G	SMSFC10	SMSFC10G	4	10	19		55		
SMFC12	SMFC12G	SMSFC12	SMSFC12G	4	12	21	0	57		
SMFC13	SMFC13G	SMSFC13	SMSFC13G	4	13	23	-16	61		
SMFC16	SMFC16G	SMSFC16	SMSFC16G	4	16	28		70		
SMFC20	SMFC20G	SMSFC20	SMSFC20G	5	20	32	0	80		
SMFC25	SMFC25G	SMSFC25	SMSFC25G	6	25	40	-19	112		
SMFC30	SMFC30G	SMSFC30	SMSFC30G	6	30	45		123		
SMFC35	SMFC35G	SMSFC35	SMSFC35G	6	35	52	0	135		
SMFC40	SMFC40G	SMSFC40	SMSFC40G	6	40	60	-22	151		
SMFC50	SMFC50G	SMSFC50	SMSFC50G	6	50	80		192		
SMFC60	SMFC60G	SMSFC60	SMSFC60G	6	60	0/-20	90	0/-25	209	

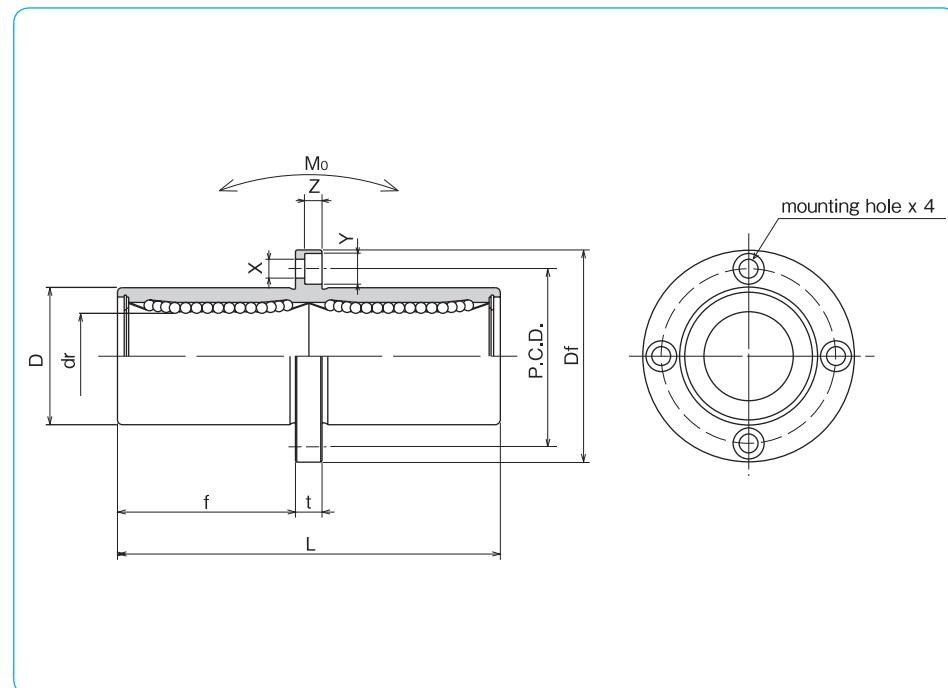

f mm	Df mm	t mm	P.C.D. mm	X×Y×Z mm	eccentricity μm	perpendicularity μm	basic load rating		allowable static moment Mo N·m	mass g	shaft diameter mm
							dynamic C N	static Co N			
15	28	5	20	3.5×6×3.1	15	15	323	530	2.18	31	6
20	32	5	24	3.5×6×3.1			431	784	4.31	51	8
24.5	40	6	29	4.5×7.5×4.1			588	1,100	7.24	98	10
25.5	42	6	32	4.5×7.5×4.1			813	1,570	10.9	110	12
27.5	43	6	33	4.5×7.5×4.1			813	1,570	11.6	130	13
32	48	6	38	4.5×7.5×4.1			1,230	2,350	19.7	190	16
36	54	8	43	5.5×9×5.1	20	20	1,400	2,740	26.8	260	20
52	62	8	51	5.5×9×5.1			1,560	3,140	43.4	540	25
56.5	74	10	60	6.6×11×6.1			2,490	5,490	82.8	680	30
62.5	82	10	67	6.6×11×6.1			2,650	6,270	110	1,020	35
69	96	13	78	9×14×8.1	25	25	3,430	8,040	147	1,570	40
89.5	116	13	98	9×14×8.1			6,080	15,900	397	3,600	50
95.5	134	18	112	11×17×11.1			7,550	20,000	530	4,500	60

1N ≈ 0.102kgf 1N · m ≈ 0.102kgf · m

SMKC TYPE

— Center Mount Square Flange Type —

**part number structure**example **SMSKC|25|G|UU-SK**

specification
SMKC: standard
SMSKC: anti-corrosion

inner contact diameter (dr)


retainer material
blank: standard/steel
anti-corrosion/stainless steel
G: resin

outer cylinder surface treatment
blank: no surface treatment
SK: electroless nickel plating
LF: low temperature black chrome treatment with fluoride coating
SB: black oxide (not available on anti-corrosion type)
SC: industrial chrome plating

seal
blank: without seal
UU: seals on both sides
ZZ: doublelip-seals on both sides

Doublelip-seal is available for size 6 to 30.

part number				number of ball circuits	dr tolerance	major dimensions		
standard	anti-corrosion	stainless retainer	resin retainer			mm	μm	L ±0.3 mm
SMKC 6	SMKC 6G	SMSKC 6	SMSKC 6G	4	6	12	0	35
SMKC 8	SMKC 8G	SMSKC 8	SMSKC 8G	4	8	15	-13	45
SMKC10	SMKC10G	SMSKC10	SMSKC10G	4	10	19		55
SMKC12	SMKC12G	SMSKC12	SMSKC12G	4	12	21	0	57
SMKC13	SMKC13G	SMSKC13	SMSKC13G	4	13	23	-16	61
SMKC16	SMKC16G	SMSKC16	SMSKC16G	4	16	28		70
SMKC20	SMKC20G	SMSKC20	SMSKC20G	5	20	32	0	80
SMKC25	SMKC25G	SMSKC25	SMSKC25G	6	25	40	-19	112
SMKC30	SMKC30G	SMSKC30	SMSKC30G	6	30	45		123
SMKC35	SMKC35G	SMSKC35	SMSKC35G	6	35	52	0	135
SMKC40	SMKC40G	SMSKC40	SMSKC40G	6	40	60	-22	151
SMKC50	SMKC50G	SMSKC50	SMSKC50G	6	50	80		192
SMKC60	SMKC60G	SMSKC60	SMSKC60G	6	60	0/-20	90	0/-25 209

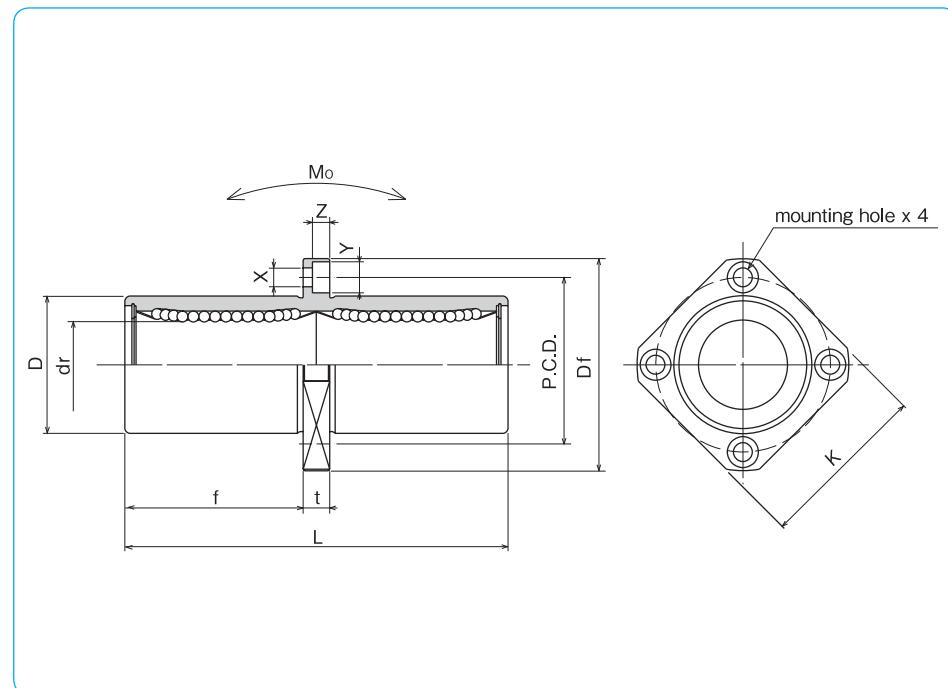

f mm	Df mm	K mm	t mm	P.C.D. mm	X×Y×Z mm	eccentricity μm	perpendicularity μm	basic load rating	allowable static moment	mass g	shaft diameter mm
								dynamic C N	static Co N	Mo N·m	
15	28	22	5	20	3.5×6×3.1	15	15	323	530	2.18	25 6
20	32	25	5	24	3.5×6×3.1			431	784	4.31	43 8
24.5	40	30	6	29	4.5×7.5×4.1			588	1,100	7.24	78 10
25.5	42	32	6	32	4.5×7.5×4.1			813	1,570	10.9	90 12
27.5	43	34	6	33	4.5×7.5×4.1			813	1,570	11.6	108 13
32	48	37	6	38	4.5×7.5×4.1			1,230	2,350	19.7	165 16
36	54	42	8	43	5.5×9×5.1		20	1,400	2,740	26.8	225 20
52	62	50	8	51	5.5×9×5.1			1,560	3,140	43.4	500 25
56.5	74	58	10	60	6.6×11×6.1			2,490	5,490	82.8	590 30
62.5	82	64	10	67	6.6×11×6.1			2,650	6,270	110	930 35
69	96	75	13	78	9×14×8.1	25	25	3,430	8,040	147	1,380 40
89.5	116	92	13	98	9×14×8.1			6,080	15,900	397	3,400 50
95.5	134	106	18	112	11×17×11.1			7,550	20,000	530	4,060 60

1N ≈ 0.102kgf 1N · m ≈ 0.102kgf · m

SMTC TYPE

— Two Side Cut Center Flange Type —




part number structure

example	SMSTC 25 G UU-SK					
specification						
SMTC: standard						
SMSTC: anti-corrosion						
inner contact diameter (dr)						
retainer material						
blank: standard/steel						
anti-corrosion/stainless steel						
G: resin						
seal						
UU: seals on both sides						
ZZ: doublelip-seals on both sides						

standard		anti-corrosion		number of ball circuits	dr tolerance	major dimensions		
steel retainer	resin retainer	stainless retainer	resin retainer			mm	μm	L ±0.3 mm
SMTC 6UU	SMTC 6GUU	SMSTC 6UU	SMSTC 6GUU	4	6	12	0	35
SMTC 8UU	SMTC 8GUU	SMSTC 8UU	SMSTC 8GUU	4	8	15	-13	45
SMTC10UU	SMTC10GUU	SMSTC10UU	SMSTC10GUU	4	10	19		55
SMTC12UU	SMTC12GUU	SMSTC12UU	SMSTC12GUU	4	12	21	0	57
SMTC13UU	SMTC13GUU	SMSTC13UU	SMSTC13GUU	4	13	23	-16	61
SMTC16UU	SMTC16GUU	SMSTC16UU	SMSTC16GUU	4	16	28		70
SMTC20UU	SMTC20GUU	SMSTC20UU	SMSTC20GUU	5	20	32	0	80
SMTC25UU	SMTC25GUU	SMSTC25UU	SMSTC25GUU	6	25	40	-19	112
SMTC30UU	SMTC30GUU	SMSTC30UU	SMSTC30GUU	6	30	45		123

* Seals-on-both-sides is standard.

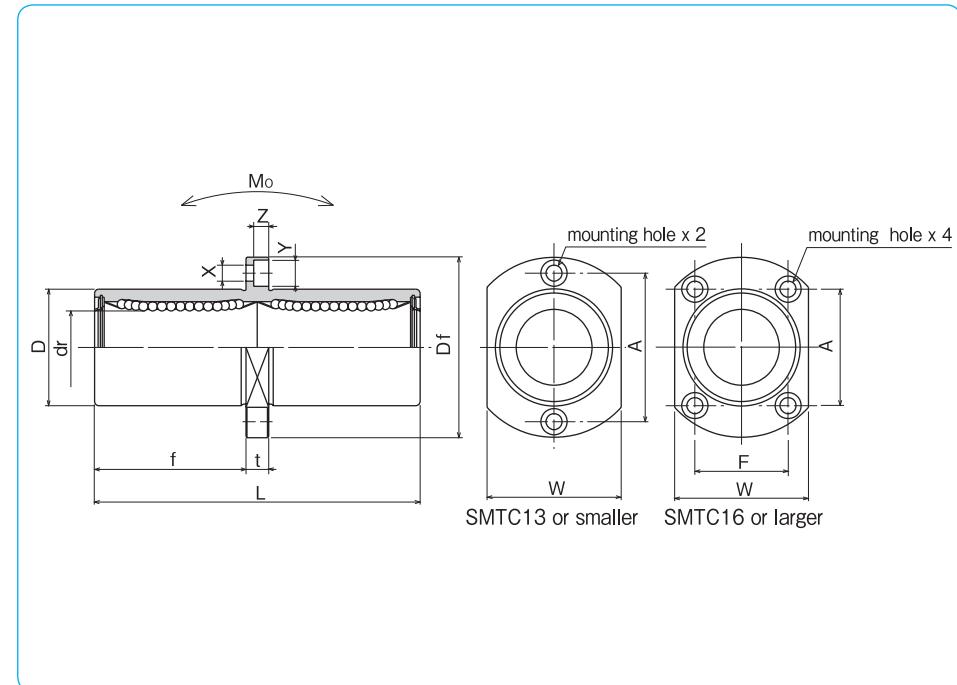

f mm	Df mm	W mm	t mm	flange			X×Y×Z mm	eccentricity μm	perpendicularity μm	basic load rating dynamic C N	basic load rating static Co N	allowable static moment Mo N·m	mass g	shaft diameter mm
				A mm	F mm	X×Y×Z mm								
15	28	18	5	20	—	3.5×6×3.1	15	15	20	323	530	2,18	28	6
20	32	21	5	24	—	3.5×6×3.1				431	784	4,31	47	8
24.5	40	25	6	29	—	4.5×7.5×4.1				588	1,100	7,24	90	10
25.5	42	27	6	32	—	4.5×7.5×4.1				813	1,570	10,9	102	12
27.5	43	29	6	33	—	4.5×7.5×4.1				813	1,570	11,6	123	13
32	48	34	6	31	22	4.5×7.5×4.1				1,230	2,350	19,7	182	16
36	54	38	8	36	24	5.5×9×5.1	20	20	20	1,400	2,740	26,8	247	20
52	62	46	8	40	32	5.5×9×5.1				1,560	3,140	43,4	525	25
56.5	74	51	10	49	35	6.6×11×6.1				2,490	5,490	82,8	645	30

SMF-W-E TYPE

— Round Flange Double-Wide Pilot End Type —




part number structure

example	SMSF 25 G W UU - E - SK	
specification		
SMF: standard		
SMSF: anti-corrosion		
inner contact diameter (dr)		
retainer material		
blank: standard/steel		
anti-corrosion/stainless steel		
G: resin		
double-wide type		
outer cylinder surface treatment		
blank: no surface treatment		
SK: electroless nickel plating		
LF: low temperature black chrome treatment with fluoride coating		
SB: black oxide (not available on anti-corrosion type)		
SC: industrial chrome plating		
with pilot end		
seal		
UU: seals on both sides		
ZZ: doublelip-seals on both sides		

Doublelip-seal is available for size 6 to 30.

part number*		standard		anti-corrosion		number of ball circuits	dr tolerance	major dimensions			±0.3 mm
steel retainer	resin retainer	stainless retainer	resin retainer	mm	μm			mm	tolerance	D	
SMF 6WUU-E	SMF 6GWUU-E	SMSF 6WUU-E	SMSF 6GWUU-E	4	6			12	0	35	
SMF 8WUU-E	SMF 8GWUU-E	SMSF 8WUU-E	SMSF 8GWUU-E	4	8			15	-13	45	
SMF10WUU-E	SMF10GWUU-E	SMSF10WUU-E	SMSF10GWUU-E	4	10		0	19		55	
SMF12WUU-E	SMF12GWUU-E	SMSF12WUU-E	SMSF12GWUU-E	4	12		-10	21	0	57	
SMF13WUU-E	SMF13GWUU-E	SMSF13WUU-E	SMSF13GWUU-E	4	13			23	-16	61	
SMF16WUU-E	SMF16GWUU-E	SMSF16WUU-E	SMSF16GWUU-E	4	16			28		70	
SMF20WUU-E	SMF20GWUU-E	SMSF20WUU-E	SMSF20GWUU-E	5	20		0	32	0	80	
SMF25WUU-E	SMF25GWUU-E	SMSF25WUU-E	SMSF25GWUU-E	6	25		-12	40	-19	112	
SMF30WUU-E	SMF30GWUU-E	SMSF30WUU-E	SMSF30GWUU-E	6	30			45		123	
SMF35WUU-E	SMF35GWUU-E	—	—	6	35		0	52	0	135	
SMF40WUU-E	SMF40GWUU-E	—	—	6	40		-15	60	-22	151	
SMF50WUU-E	SMF50GWUU-E	—	—	6	50			80		192	
SMF60WUU-E	SMF60GWUU-E	—	—	6	60	0/-20	90	0/-25		209	

* Seals-on-both-sides is standard.

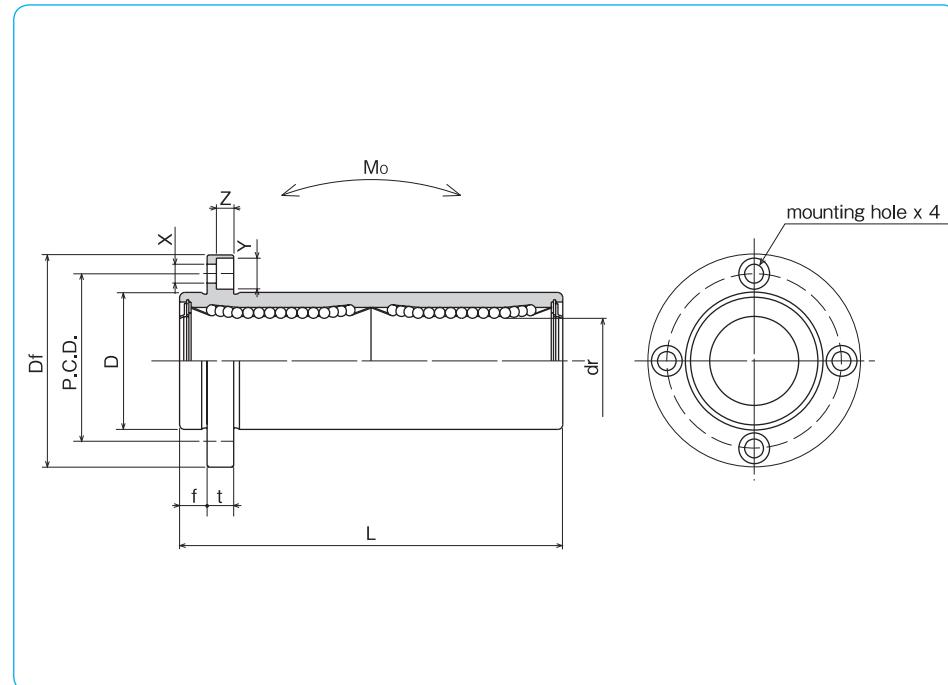

f mm	Df mm	t mm	flange			eccentricity μm	perpendicularity μm	basic load rating dynamic C N	load rating static Co N	allowable static moment Mo N·m	mass g	shaft diameter mm
			P.C.D. mm	X×Y×Z mm								
5	28	5	20	3.5×6×3.1		15	15	323	530	2.18	31	6
5	32	5	24	3.5×6×3.1				431	784	4.31	51	8
6	40	6	29	4.5×7.5×4.1				588	1,100	7.24	98	10
6	42	6	32	4.5×7.5×4.1				813	1,570	10.9	110	12
6	43	6	33	4.5×7.5×4.1				813	1,570	11.6	130	13
6	48	6	38	4.5×7.5×4.1				1,230	2,350	19.7	190	16
8	54	8	43	5.5×9×5.1		20	20	1,400	2,740	26.8	260	20
8	62	8	51	5.5×9×5.1				1,560	3,140	43.4	540	25
10	74	10	60	6.6×11×6.1				2,490	5,490	82.8	680	30
10	82	10	67	6.6×11×6.1		25	25	2,650	6,270	110	1,020	35
13	96	13	78	9×14×8.1				3,430	8,040	147	1,570	40
13	116	13	98	9×14×8.1				6,080	15,900	397	3,600	50
18	134	18	112	11×17×11.1				7,550	20,000	530	4,500	60

1N ≈ 0.102kgf 1N · m ≈ 0.102kgf · m

SMK-W-E TYPE

— Square Flange Double-Wide Pilot End Type —




part number structure

example	SMSK 25 G W UU - E - SK
specification	
SMK: standard	
SMSK: anti-corrosion	
inner contact diameter (dr)	
retainer material	
blank: standard/steel	
anti-corrosion/stainless steel	
G: resin	
double-wide type	
outer cylinder surface treatment	
blank: no surface treatment	
SK: electroless nickel plating	
LF: low temperature black chrome treatment with fluoride coating	
SB: black oxide (not available on anti-corrosion type)	
SC: industrial chrome plating	
with pilot end	
seal	
UU: seals on both sides	
ZZ: doublelip-seals on both sides	

Doublelip-seal is available for size 6 to 30.

part number*		standard		anti-corrosion		number of ball circuits	dr tolerance mm	major dimensions		
steel retainer	resin retainer	stainless retainer	resin retainer	mm	μm			D tolerance mm	μm	L ±0.3 mm
SMK 6WUU-E	SMK 6GWUU-E	SMSK 6WUU-E	SMSK 6GWUU-E	4	6	12	0	35		
SMK 8WUU-E	SMK 8GWUU-E	SMSK 8WUU-E	SMSK 8GWUU-E	4	8	15	-13	45		
SMK10WUU-E	SMK10GWUU-E	SMSK10WUU-E	SMSK10GWUU-E	4	10	19		55		
SMK12WUU-E	SMK12GWUU-E	SMSK12WUU-E	SMSK12GWUU-E	4	12	21	0	57		
SMK13WUU-E	SMK13GWUU-E	SMSK13WUU-E	SMSK13GWUU-E	4	13	23	-16	61		
SMK16WUU-E	SMK16GWUU-E	SMSK16WUU-E	SMSK16GWUU-E	4	16	28		70		
SMK20WUU-E	SMK20GWUU-E	SMSK20WUU-E	SMSK20GWUU-E	5	20	32	0	80		
SMK25WUU-E	SMK25GWUU-E	SMSK25WUU-E	SMSK25GWUU-E	6	25	40	-19	112		
SMK30WUU-E	SMK30GWUU-E	SMSK30WUU-E	SMSK30GWUU-E	6	30	45		123		
SMK35WUU-E	SMK35GWUU-E	—	—	6	35	52	0	135		
SMK40WUU-E	SMK40GWUU-E	—	—	6	40	60	-22	151		
SMK50WUU-E	SMK50GWUU-E	—	—	6	50	80		192		
SMK60WUU-E	SMK60GWUU-E	—	—	6	60	0/-20	90	0/-25	209	

* Seals-on-both-sides is standard.

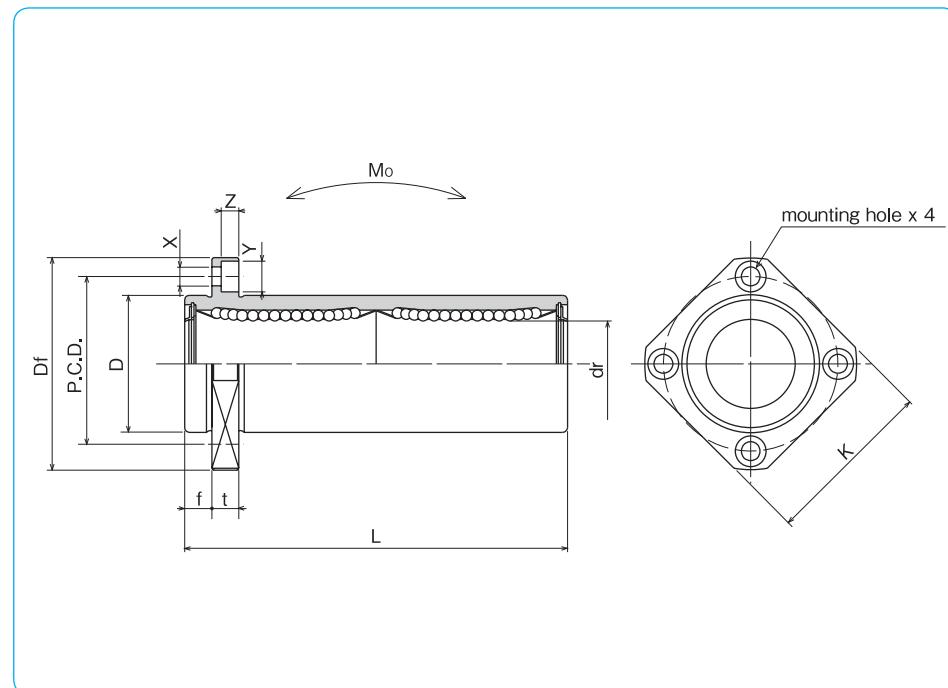

f mm	Df mm	K mm	t mm	P.C.D. mm	X×Y×Z mm	eccentricity μm	perpendicularity μm	basic load rating		allowable static moment Mo N·m	mass g	shaft diameter mm
								dynamic C N	static Co N			
5	28	22	5	20	3.5×6×3.1	15	15	323	530	2.18	25	6
5	32	25	5	24	3.5×6×3.1			431	784	4.31	43	8
6	40	30	6	29	4.5×7.5×4.1			588	1,100	7.24	78	10
6	42	32	6	32	4.5×7.5×4.1			813	1,570	10.9	90	12
6	43	34	6	33	4.5×7.5×4.1			813	1,570	11.6	108	13
6	48	37	6	38	4.5×7.5×4.1			1,230	2,350	19.7	165	16
8	54	42	8	43	5.5×9×5.1	20	20	1,400	2,740	26.8	225	20
8	62	50	8	51	5.5×9×5.1			1,560	3,140	43.4	500	25
10	74	58	10	60	6.6×11×6.1			2,490	5,490	82.8	590	30
10	82	64	10	67	6.6×11×6.1			2,650	6,270	110	930	35
13	96	75	13	78	9×14×8.1	25	25	3,430	8,040	147	1,380	40
13	116	92	13	98	9×14×8.1			6,080	15,900	397	3,400	50
18	134	106	18	112	11×17×11.1			7,550	20,000	530	4,060	60

1N ≈ 0.102kgf 1N · m ≈ 0.102kgf · m

SMT-W-E TYPE

— Two Side Cut Double-Wide Flange Pilot End Type —




part number structure

example	SMST 25 G W UU-E-SK	
specification		
SMT: standard		
SMST: anti-corrosion		
inner contact diameter (dr)		
retainer material		
blank: standard/steel		
anti-corrosion/stainless steel		
G: resin		
double-wide type		
outer cylinder surface treatment		
blank: no surface treatment		
SK: electroless nickel plating		
LF: low temperature black chrome treatment with fluoride coating		
SB: black oxide (not available on anti-corrosion type)		
SC: industrial chrome plating		
with pilot end		
seal		
UU: seals on both sides		
ZZ: doublelip-seals on both sides		

part number*		standard		anti-corrosion		number of ball circuits	dr tolerance mm	major dimensions	
steel retainer	resin retainer	stainless retainer	resin retainer	mm	μm			D tolerance mm	±0.3 μm
SMT 6WUU-E	SMT 6GWUU-E	SMST 6WUU-E	SMST 6GWUU-E	4	6	12	0	35	
SMT 8WUU-E	SMT 8GWUU-E	SMST 8WUU-E	SMST 8GWUU-E	4	8	15	-13	45	
SMT10WUU-E	SMT10GWUU-E	SMST10WUU-E	SMST10GWUU-E	4	10	19		55	
SMT12WUU-E	SMT12GWUU-E	SMST12WUU-E	SMST12GWUU-E	4	12	21	0	57	
SMT13WUU-E	SMT13GWUU-E	SMST13WUU-E	SMST13GWUU-E	4	13	23	-16	61	
SMT16WUU-E	SMT16GWUU-E	SMST16WUU-E	SMST16GWUU-E	4	16	28		70	
SMT20WUU-E	SMT20GWUU-E	SMST20WUU-E	SMST20GWUU-E	5	20	32	0	80	
SMT25WUU-E	SMT25GWUU-E	SMST25WUU-E	SMST25GWUU-E	6	25	40	-19	112	
SMT30WUU-E	SMT30GWUU-E	SMST30WUU-E	SMST30GWUU-E	6	30	45		123	

* Seals-on-both-sides is standard.

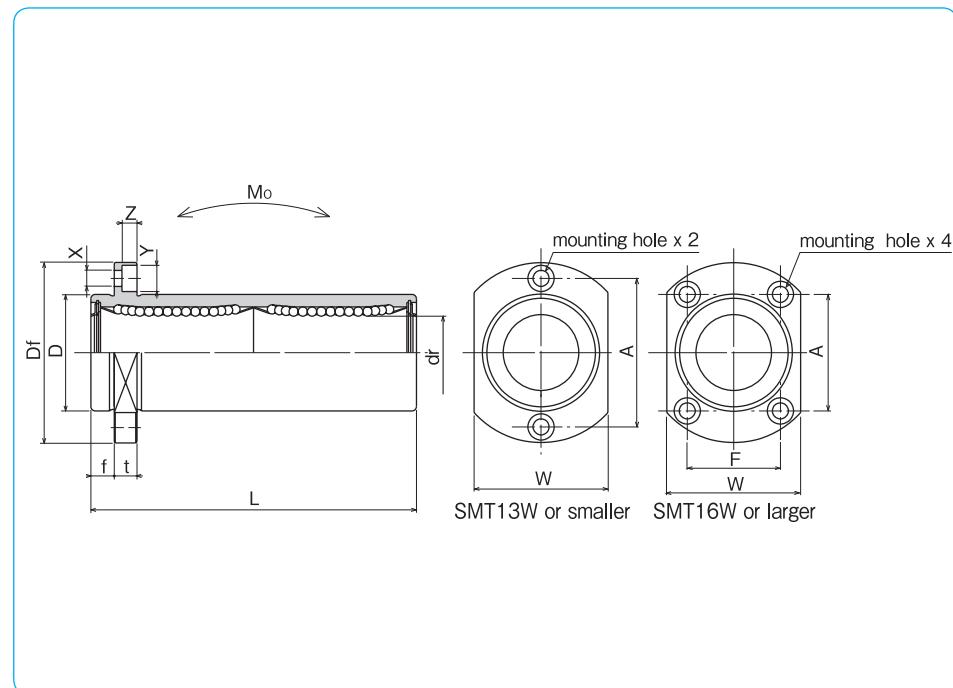


f mm	Df mm	flange					eccentricity μm	perpendicularity μm	basic load rating dynamic C N	basic load rating static Co N	allowable static moment Mo N·m	mass g	shaft diameter mm
		W mm	t mm	A mm	F mm	X×Y×Z mm							
5	28	18	5	20	—	3.5×6×3.1	15	15	323	530	2.18	28	6
5	32	21	5	24	—	3.5×6×3.1			431	784	4.31	47	8
6	40	25	6	29	—	4.5×7.5×4.1			588	1,100	7.24	90	10
6	42	27	6	32	—	4.5×7.5×4.1			813	1,570	10.9	102	12
6	43	29	6	33	—	4.5×7.5×4.1			813	1,570	11.6	123	13
6	48	34	6	31	22	4.5×7.5×4.1			1,230	2,350	19.7	182	16
8	54	38	8	36	24	5.5×9×5.1	20	20	1,400	2,740	26.8	247	20
8	62	46	8	40	32	5.5×9×5.1			1,560	3,140	43.4	525	25
10	74	51	10	49	35	6.6×11×6.1			2,490	5,490	82.8	645	30

1N=0.102kgf 1N·m=0.102kgf·m

TRF TYPE

— Triple-Wide Round Flange Type —

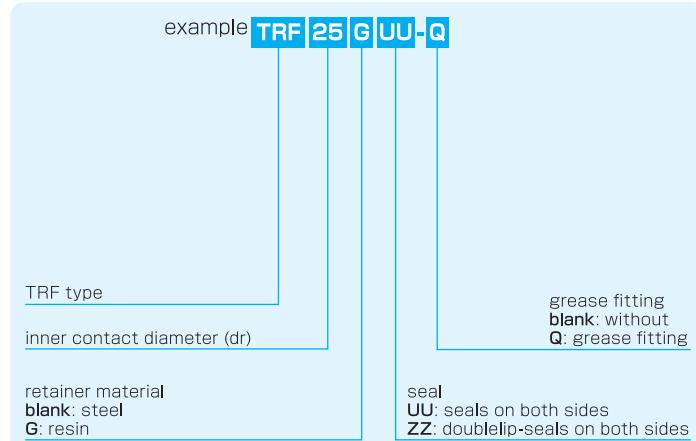**part number structure**


Doublelip-seal is available for size 6 to 30.

part number*		number of ball circuits	dr tolerance mm	major dimensions		
steel retainer	resin retainer			D tolerance μm	L ±0.3 mm	
TRF 6UU	TRF 6GUU	4	6	15	0/-18	51
TRF 8UU	TRF 8GUU	4	8	19	-12	66
TRF10UU	TRF10GUU	4	10	23	0	80
TRF12UU	TRF12GUU	4	12	26	-21	84
TRF13UU	TRF13GUU	4	13	28	-15	90
TRF16UU	TRF16GUU	4	16	32	0	103
TRF20UU	TRF20GUU	5	20	40	-25	118
TRF25UU	TRF25GUU	6	25	45	-18	165
TRF30UU	TRF30GUU	6	30	52	0	182
TRF35UU	TRF35GUU	6	35	60	-30	200
TRF40UU	TRF40GUU	6	40	65	-21	230
TRF50UU	TRF50GUU	6	50	85	0	290
TRF60UU	TRF60GUU	6	60	100	-35	310

Outer cylinder is treated with electroless nickel plating.

* Seals-on-both-sides is standard.

** TRF6: A-MT6x1 TRF8: A-M6x1 TRF10~30: A-M6F TRF35~60: A-R1/8

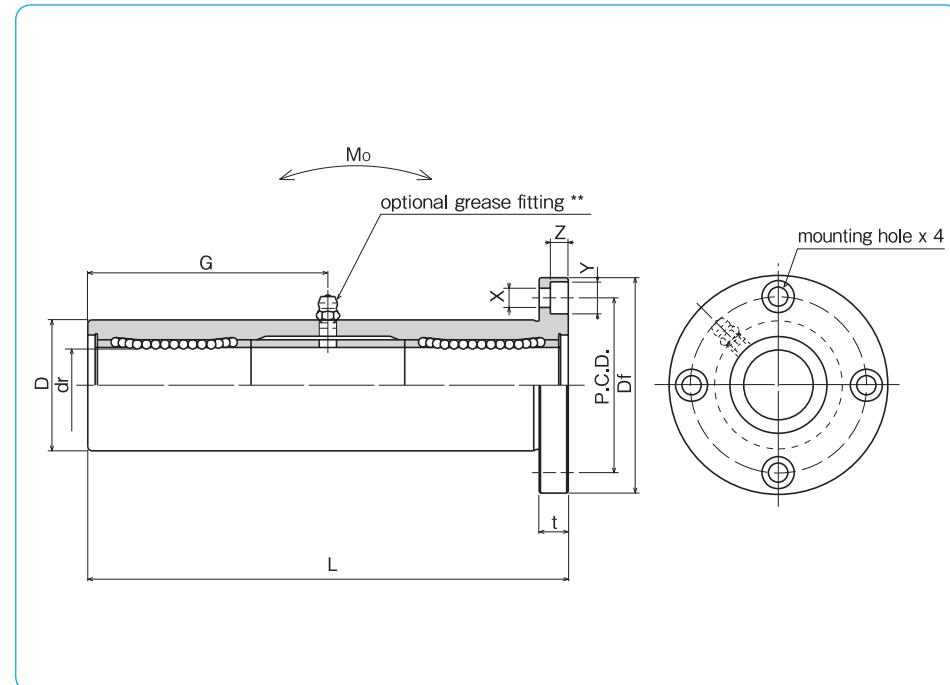


Df mm	t mm	flange P.C.D. mm	X×Y×Z mm	grease fitting G mm	eccentricity μm	perpendicularity μm	basic load rating		allowable static moment Mo N·m	mass g	shaft diameter mm
							dynamic C N	static Co N			
32	5	24	3.5×6×3.1	20.5	20	20	323	530	8.2	66	6
40	6	29	4.5×7.5×4.1	29			431	784	16.0	135	8
43	6	33	4.5×7.5×4.1	38			588	1,100	27.0	205	10
46	6	36	4.5×7.5×4.1	41			813	1,570	40.1	248	12
48	6	38	4.5×7.5×4.1	45			813	1,570	42.9	308	13
54	8	43	5.5×9×5.1	51			1,230	2,350	73.5	412	16
62	8	51	5.5×9×5.1	59	25	25	1,400	2,740	98.0	752	20
74	10	60	6.6×11×6.1	82.5			1,560	3,140	157	1,244	25
82	10	67	6.6×11×6.1	91			2,490	5,490	297	1,636	30
96	13	78	9×14×8.1	100			2,650	6,270	373	2,580	35
101	13	83	9×14×8.1	115	30	30	3,430	8,040	553	2,950	40
129	18	107	11×17×11.1	145			6,080	15,900	1,370	6,860	50
144	18	122	11×17×11.1	155			7,550	20,000	1,800	9,660	60

1N=0.102kgf 1N·m=0.102kgf·m

TRK TYPE

— Triple-Wide Square Flange Type —

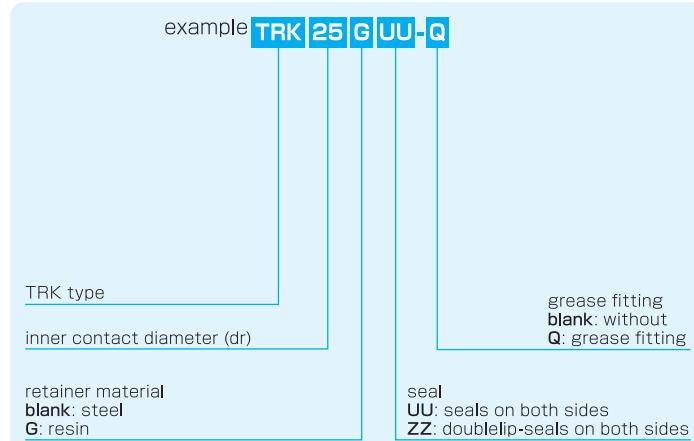**part number structure**


Doublelip-seal is available for size 6 to 30.

part number*		number of ball circuits	dr tolerance mm	major dimensions		
steel retainer	resin retainer			D tolerance μm	L ±0.3 mm	
TRK 6UU	TRK 6GUU	4	6	15	0/-18	51
TRK 8UU	TRK 8GUU	4	8	19	-12	66
TRK10UU	TRK10GUU	4	10	23	0	80
TRK12UU	TRK12GUU	4	12	26	-21	84
TRK13UU	TRK13GUU	4	13	28		90
TRK16UU	TRK16GUU	4	16	32	0	103
TRK20UU	TRK20GUU	5	20	40	-25	118
TRK25UU	TRK25GUU	6	25	45		165
TRK30UU	TRK30GUU	6	30	52	0	182
TRK35UU	TRK35GUU	6	35	60	-30	200
TRK40UU	TRK40GUU	6	40	65		230
TRK50UU	TRK50GUU	6	50	85	0	290
TRK60UU	TRK60GUU	6	60	100	-35	310

Outer cylinder is treated with electroless nickel plating.

* Seals-on-both-sides is standard.

** TRK6: A-MT6x1 TRK8: A-M6x1 TRK10~30: A-M6F TRK35~60: A-R1/8


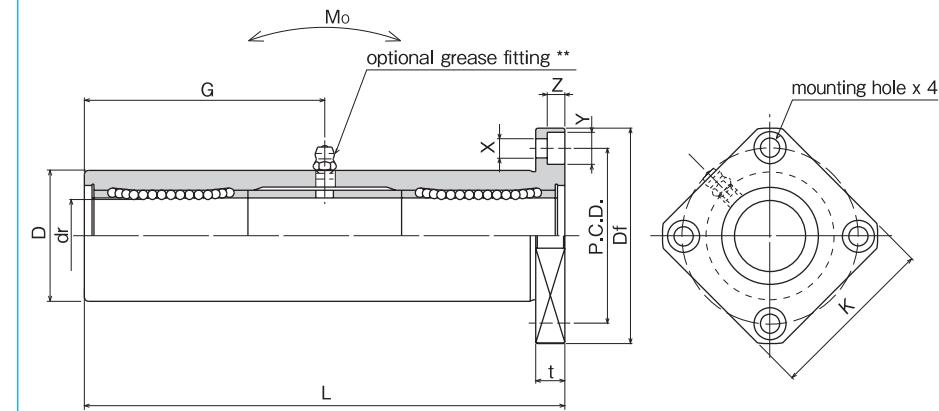


Df mm	K mm	t mm	flange P.C.D. mm			grease fitting G mm	eccentricity μm	perpendicularity μm	basic load rating dynamic C N	basic load rating static Co N	allowable static moment Mo N·m	mass g	shaft diameter mm
			X	Y	Z mm								
32	25	5	24	3.5×6×3.1		20.5	20	20	323	530	8.2	58	6
40	30	6	29	4.5×7.5×4.1		29			431	784	16.0	117	8
43	34	6	33	4.5×7.5×4.1		38			588	1,100	27.0	189	10
46	35	6	36	4.5×7.5×4.1		41			813	1,570	40.1	228	12
48	37	6	38	4.5×7.5×4.1		45			813	1,570	42.9	286	13
54	42	8	43	5.5×9×5.1		51			1,230	2,350	73.5	376	16
62	50	8	51	5.5×9×5.1		59	25	25	1,400	2,740	98.0	714	20
74	58	10	60	6.6×11×6.1		82.5			1,560	3,140	157	1,163	25
82	64	10	67	6.6×11×6.1		91			2,490	5,490	297	1,543	30
96	75	13	78	9×14×8.1		100			2,650	6,270	373	2,400	35
101	80	13	83	9×14×8.1		115	30	30	3,430	8,040	553	2,510	40
129	100	18	107	11×17×11.1		145			6,080	15,900	1,370	6,400	50
144	116	18	122	11×17×11.1		155			7,550	20,000	1,800	9,200	60

1N=0.102kgf 1N·m=0.102kgf·m

TRT TYPE

— Triple-Wide Two Side Cut Flange Type —

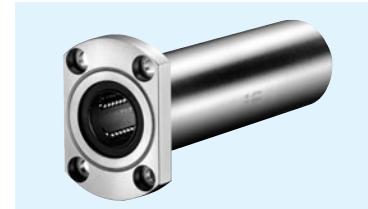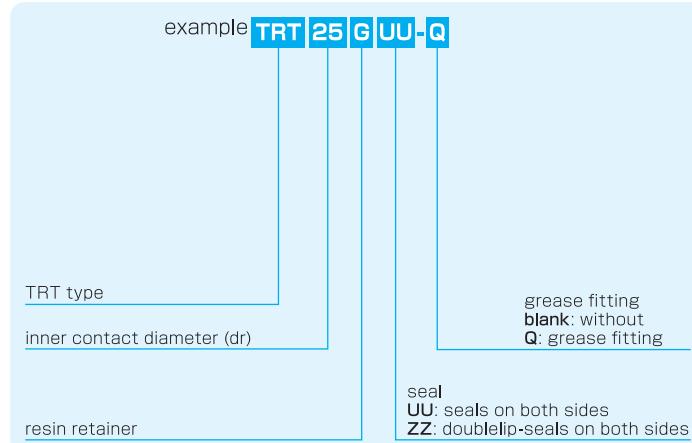
**part number structure**

part number*	number of ball circuits	dr tolerance		D tolerance		major dimensions			flange		
		mm	μm	mm	μm	L ±0.3 mm	Df mm	W mm	t mm	A mm	F mm
TRT12GUU	4	12		26	0	84	46	32	6	28	22
TRT13GUU	4	13		28	-21	90	48	34	6	31	22
TRT16GUU	4	16		32	0	103	54	38	8	36	24
TRT20GUU	5	20		40	-25	118	62	46	8	40	32
TRT25GUU	6	25		45		165	74	51	10	49	35
TRT30GUU	6	30		52	0/-30	182	82	58	10	55	38

Outer cylinder is treated with electroless nickel plating.

* Seals-on-both-sides is standard.

**TRT12G~30G : A-M6F

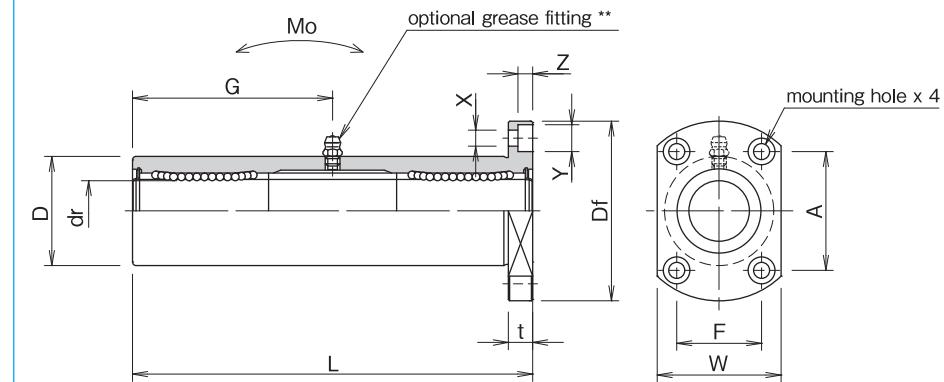


X × Y × Z mm	grease fitting G mm	eccentricity μm	perpendicularity μm	basic load rating dynamic C N	basic load rating static Co N	allowable static moment Mo N · m	mass g	shaft diameter mm
4.5 × 7.5 × 4.1	41	20	20	813	1,570	40.1	236	12
4.5 × 7.5 × 4.1	45			813	1,570	42.9	291	13
5.5 × 9 × 5.1	51			1,230	2,350	73.5	388	16
5.5 × 9 × 5.1	59			1,400	2,740	98.0	720	20
6.6 × 11 × 6.1	82.5			1,560	3,140	157	1,160	25
6.6 × 11 × 6.1	91			2,490	5,490	297	1,555	30

1N = 0.102kgf 1N · m = 0.102kgf · m

TRFC TYPE

— Triple-Wide Intermediate Position Round Flange Type —

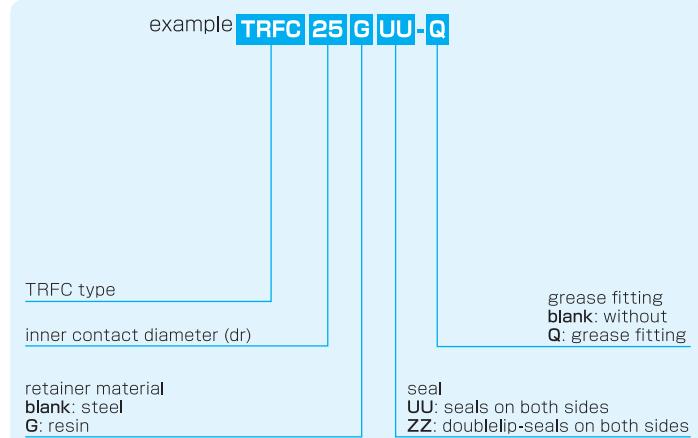**part number structure**


Doublelip-seal is available for size 6 to 30.

part number*		number of ball circuits	dr tolerance mm	major dimensions		
steel retainer	resin retainer			D tolerance μm	L ±0.3 mm	
TRFC 6UU	TRFC 6GUU	4	6	15	0/-18	51
TRFC 8UU	TRFC 8GUU	4	8	19	-12	66
TRFC10UU	TRFC10GUU	4	10	23	0	80
TRFC12UU	TRFC12GUU	4	12	26	-21	84
TRFC13UU	TRFC13GUU	4	13	28	-15	90
TRFC16UU	TRFC16GUU	4	16	32	0	103
TRFC20UU	TRFC20GUU	5	20	40	-25	118
TRFC25UU	TRFC25GUU	6	25	45	-18	165
TRFC30UU	TRFC30GUU	6	30	52	0	182
TRFC35UU	TRFC35GUU	6	35	60	-30	200
TRFC40UU	TRFC40GUU	6	40	65	-21	230
TRFC50UU	TRFC50GUU	6	50	85	0	290
TRFC60UU	TRFC60GUU	6	60	100	-35	310

Outer cylinder is treated with electroless nickel plating.

* Seals-on-both-sides is standard.

** TRFC6: A-MT6x1 TRFC8: A-M6x1 TRFC10~30: A-M6F TRFC35~60: A-R1/8

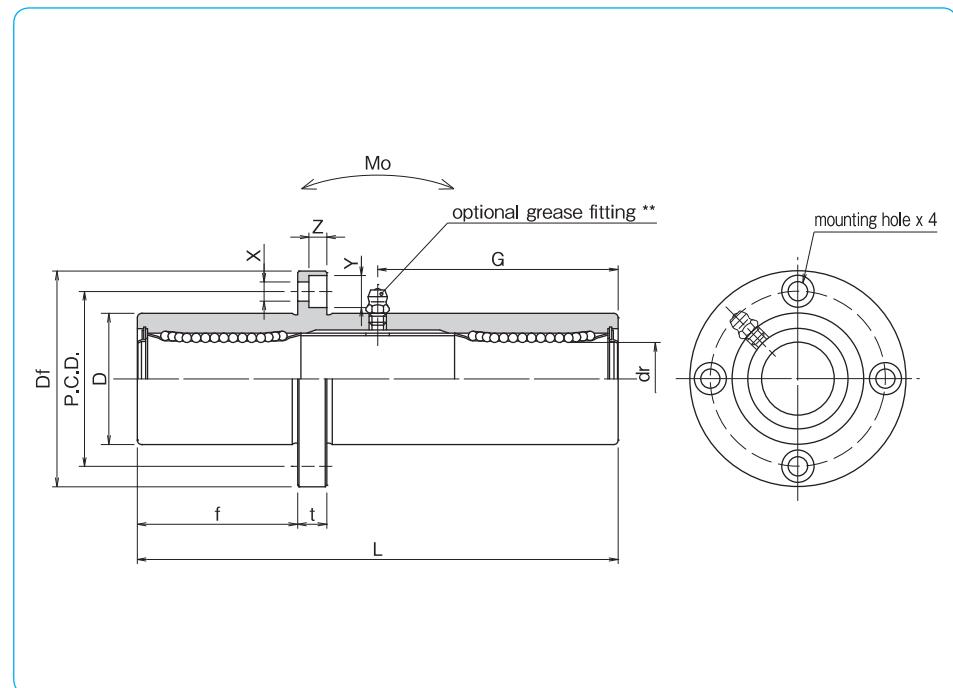

f mm	Df mm	t mm	P.C.D. mm	X×Y×Z mm	grease fitting G mm	eccentricity μm	perpendicularity μm	basic load rating		allowable static moment Mo N·m	mass g	shaft diameter mm
								dynamic C N	static Co N			
17	32	5	24	3.5×6×3.1	20.5	20	20	323	530	8.2	66	6
22	40	6	29	4.5×7.5×4.1	29			431	784	16.0	135	8
27	43	6	33	4.5×7.5×4.1	38			588	1,100	27.0	205	10
28	46	6	36	4.5×7.5×4.1	41			813	1,570	40.1	248	12
30	48	6	38	4.5×7.5×4.1	45			813	1,570	42.9	308	13
35	54	8	43	5.5×9×5.1	51			1,230	2,350	73.5	412	16
40	62	8	51	5.5×9×5.1	59	25	25	1,400	2,740	98.0	752	20
55	74	10	60	6.6×11×6.1	82.5			1,560	3,140	157	1,244	25
61	82	10	67	6.6×11×6.1	91			2,490	5,490	297	1,636	30
67	96	13	78	9×14×8.1	100			2,650	6,270	373	2,580	35
77	101	13	83	9×14×8.1	115	30	30	3,430	8,040	553	2,950	40
97	129	18	107	11×17×11.1	145			6,080	15,900	1,370	6,860	50
104	144	18	122	11×17×11.1	155			7,550	20,000	1,800	9,660	60


1N=0.102kgf 1N·m=0.102kgf·m

TRKC TYPE

— Triple-Wide Intermediate Position Square Flange Type —



part number structure

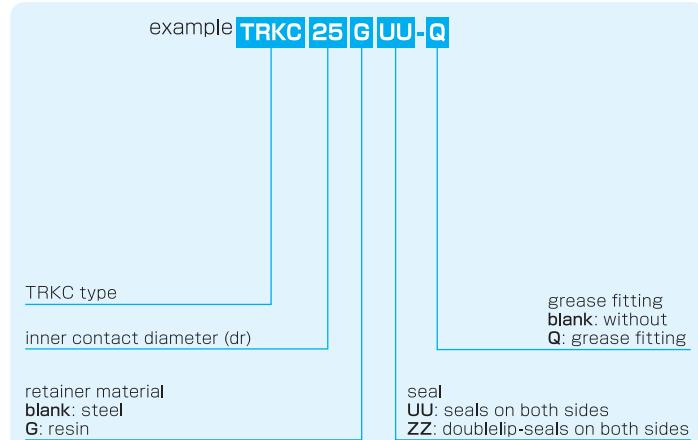


Doublelip-seal is available for size 6 to 30.

part number*		number of ball circuits	dr tolerance mm	major dimensions		
steel retainer	resin retainer			D tolerance μm	L ±0.3 mm	
TRKC 6UU	TRKC 6GUU	4	6	15	0/-18	51
TRKC 8UU	TRKC 8GUU	4	8	19	-12	66
TRKC10UU	TRKC10GUU	4	10	23	0	80
TRKC12UU	TRKC12GUU	4	12	26	-21	84
TRKC13UU	TRKC13GUU	4	13	28	-15	90
TRKC16UU	TRKC16GUU	4	16	32	0	103
TRKC20UU	TRKC20GUU	5	20	40	-25	118
TRKC25UU	TRKC25GUU	6	25	45	-18	165
TRKC30UU	TRKC30GUU	6	30	52	0	182
TRKC35UU	TRKC35GUU	6	35	60	-30	200
TRKC40UU	TRKC40GUU	6	40	65	-21	230
TRKC50UU	TRKC50GUU	6	50	85	0	290
TRKC60UU	TRKC60GUU	6	60	100	-35	310

Outer cylinder is treated with electroless nickel plating.

* Seals-on-both-sides is standard.

** TRKC6: A-MT6x1 TRKC8: A-M6x1 TRKC10~30: A-M6F TRKC35~60: A-R1/8

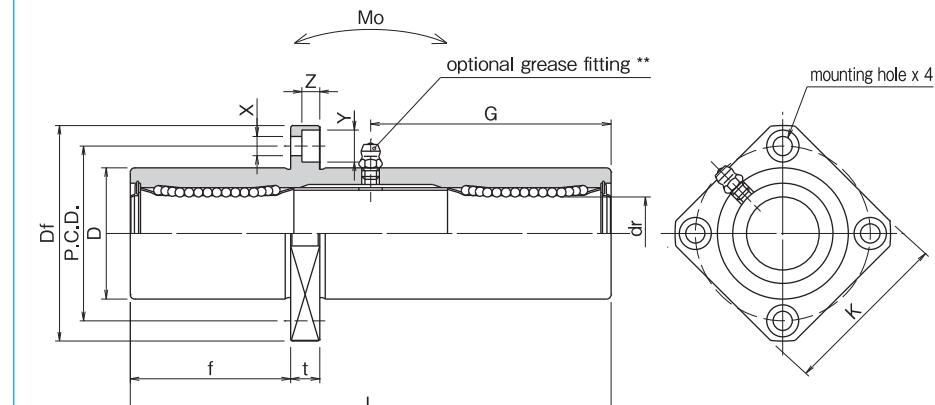


f mm	Df mm	flange			P.C.D. mm	X×Y×Z mm	grease fitting G mm	eccentricity μm	perpendicularity μm	basic load rating dynamic C N	basic load rating static Co N	allowable static moment Mo N·m	mass g	shaft diameter mm
		K mm	t mm	P.C.D. mm										
17	32	25	5	24	3.5×6×3.1	20.5	20	20	323	530	8.2	58	6	
22	40	30	6	29	4.5×7.5×4.1	29			431	784	16.0	117	8	
27	43	34	6	33	4.5×7.5×4.1	38			588	1,100	27.0	189	10	
28	46	35	6	36	4.5×7.5×4.1	41			813	1,570	40.1	228	12	
30	48	37	6	38	4.5×7.5×4.1	45			813	1,570	42.9	286	13	
35	54	42	8	43	5.5×9×5.1	51			1,230	2,350	73.5	376	16	
40	62	50	8	51	5.5×9×5.1	59	25	25	1,400	2,740	98.0	714	20	
55	74	58	10	60	6.6×11×6.1	82.5			1,560	3,140	157	1,163	25	
61	82	64	10	67	6.6×11×6.1	91			2,490	5,490	297	1,543	30	
67	96	75	13	78	9×14×8.1	100			2,650	6,270	373	2,400	35	
77	101	80	13	83	9×14×8.1	115			3,430	8,040	553	2,510	40	
97	129	100	18	107	11×17×11.1	145	30	30	6,080	15,900	1,370	6,400	50	
104	144	116	18	122	11×17×11.1	155			7,550	20,000	1,800	9,200	60	

1N=0.102kgf 1N·m=0.102kgf·m

TRF-E TYPE

— Triple-Wide Round Flange Pilot End Type —

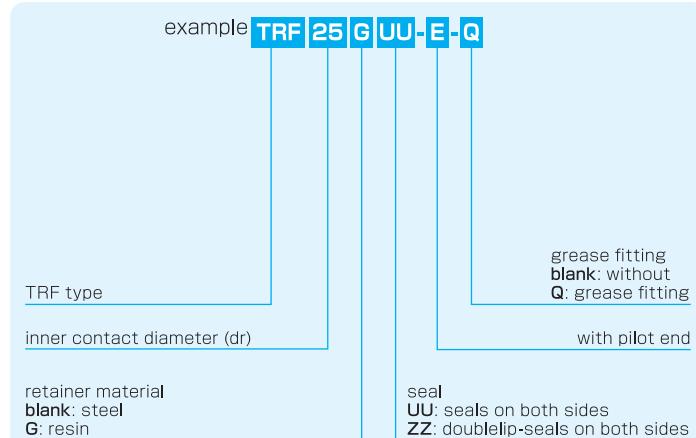**part number structure**


Doublelip-seal is available for size 6 to 30.

part number*		number of ball circuits	dr tolerance mm	major dimensions		
steel retainer	resin retainer			D tolerance μm	L $\pm 0.3 \text{ mm}$	
TRF 6UU-E	TRF 6GUU-E	4	6	15	0/-18	51
TRF 8UU-E	TRF 8GUU-E	4	8	19	-12	66
TRF10UU-E	TRF10GUU-E	4	10	23	0	80
TRF12UU-E	TRF12GUU-E	4	12	26	-21	84
TRF13UU-E	TRF13GUU-E	4	13	28		90
TRF16UU-E	TRF16GUU-E	4	16	32	0	103
TRF20UU-E	TRF20GUU-E	5	20	40	-25	118
TRF25UU-E	TRF25GUU-E	6	25	45		165
TRF30UU-E	TRF30GUU-E	6	30	52	0	182
TRF35UU-E	TRF35GUU-E	6	35	60	-30	200
TRF40UU-E	TRF40GUU-E	6	40	65		230
TRF50UU-E	TRF50GUU-E	6	50	85	0	290
TRF60UU-E	TRF60GUU-E	6	60	100	-35	310

Outer cylinder is treated with electroless nickel plating.

* Seals-on-both-sides is standard.

** TRF6: A-MT6x1 TRF8: A-M6x1 TRF10~30: A-M6F TRF35~60: A-R1/8

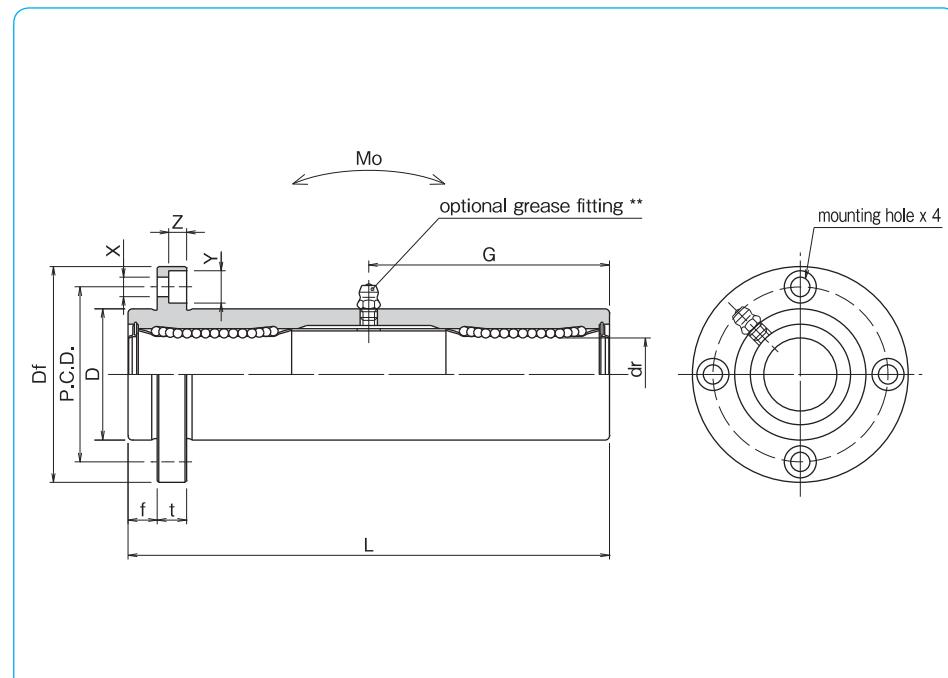


f mm	Df mm	t mm	P.C.D. mm	X×Y×Z mm	grease fitting G mm	eccentricity μm	perpendicularity μm	basic load rating		allowable static moment Mo N·m	mass g	shaft diameter mm
								dynamic C N	static Co N			
5	32	5	24	3.5×6×3.1	20.5	20	20	323	530	8.2	66	6
6	40	6	29	4.5×7.5×4.1	29			431	784	16.0	135	8
6	43	6	33	4.5×7.5×4.1	38			588	1,100	27.0	205	10
6	46	6	36	4.5×7.5×4.1	41			813	1,570	40.1	248	12
6	48	6	38	4.5×7.5×4.1	45			813	1,570	42.9	308	13
8	54	8	43	5.5×9×5.1	51			1,230	2,350	73.5	412	16
8	62	8	51	5.5×9×5.1	59	25	25	1,400	2,740	98.0	752	20
10	74	10	60	6.6×11×6.1	82.5			1,560	3,140	157	1,244	25
10	82	10	67	6.6×11×6.1	91			2,490	5,490	297	1,636	30
13	96	13	78	9×14×8.1	100			2,650	6,270	373	2,580	35
13	101	13	83	9×14×8.1	115	30	30	3,430	8,040	553	2,950	40
18	129	18	107	11×17×11.1	145			6,080	15,900	1,370	6,860	50
18	144	18	122	11×17×11.1	155			7,550	20,000	1,800	9,660	60

1N \approx 0.102kgf 1N·m \approx 0.102kgf·m

TRK-E TYPE

— Triple-Wide Square Flange Pilot End Type —

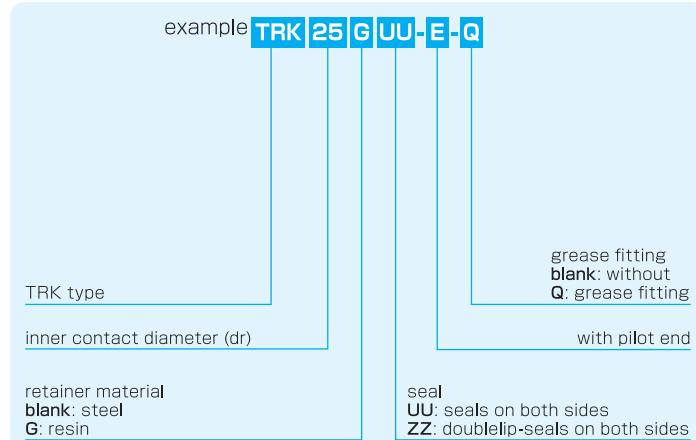**part number structure**


Doublelip-seal is available for size 6 to 30.

part number*		number of ball circuits	dr tolerance mm	major dimensions		
steel retainer	resin retainer			D tolerance μm	L $\pm 0.3 \text{ mm}$	
TRK 6UU-E	TRK 6GUU-E	4	6	15	0/-18	51
TRK 8UU-E	TRK 8GUU-E	4	8	19	-12	66
TRK10UU-E	TRK10GUU-E	4	10	23	0	80
TRK12UU-E	TRK12GUU-E	4	12	26	-21	84
TRK13UU-E	TRK13GUU-E	4	13	28	0	90
TRK16UU-E	TRK16GUU-E	4	16	32	-15	103
TRK20UU-E	TRK20GUU-E	5	20	40	0	118
TRK25UU-E	TRK25GUU-E	6	25	45	-25	165
TRK30UU-E	TRK30GUU-E	6	30	52	0	182
TRK35UU-E	TRK35GUU-E	6	35	60	-30	200
TRK40UU-E	TRK40GUU-E	6	40	65	0	230
TRK50UU-E	TRK50GUU-E	6	50	85	-21	290
TRK60UU-E	TRK60GUU-E	6	60	100	0/-25	310

Outer cylinder is treated with electroless nickel plating.

* Seals-on-both-sides is standard.

** TRK6: A-MT6x1 TRK8: A-M6x1 TRK10~30: A-M6F TRK35~60: A-R1/8

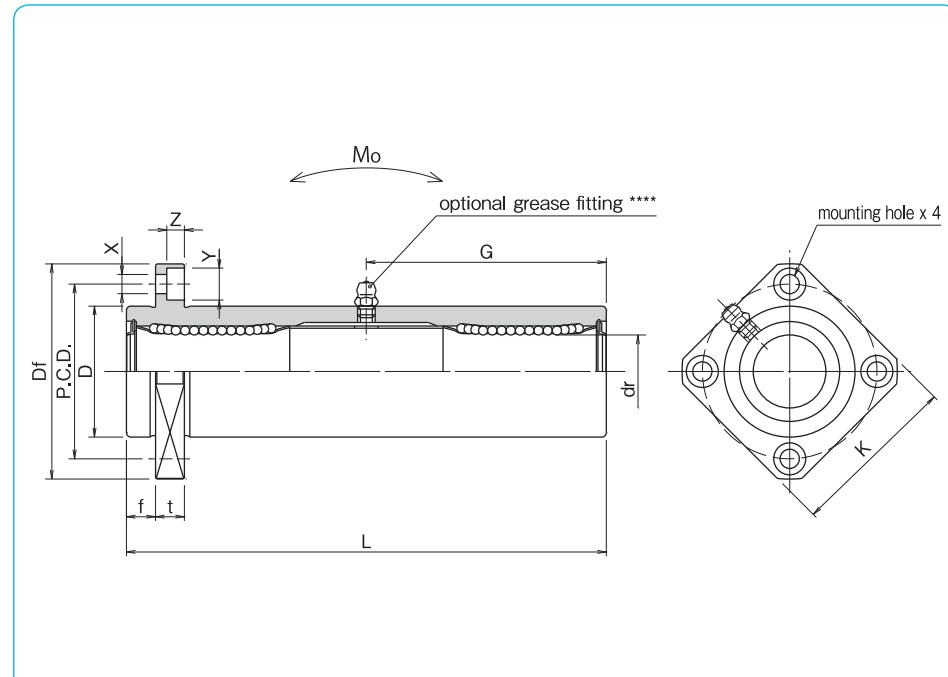

f mm	Df mm	flange			P.C.D. mm	X×Y×Z mm	grease fitting G mm	eccentricity μm	perpendicularity μm	basic load rating dynamic C N	basic load rating static Co N	allowable static moment Mo N·m	mass g	shaft diameter mm
		K mm	t mm	X mm										
5	32	25	5	24	3.5×6×3.1	20.5	20	20	323	530	8.2	58	6	
6	40	30	6	29	4.5×7.5×4.1	29			431	784	16.0	117	8	
6	43	34	6	33	4.5×7.5×4.1	38			588	1,100	27.0	189	10	
6	46	35	6	36	4.5×7.5×4.1	41			813	1,570	40.1	228	12	
6	48	37	6	38	4.5×7.5×4.1	45			813	1,570	42.9	286	13	
8	54	42	8	43	5.5×9×5.1	51			1,230	2,350	73.5	376	16	
8	62	50	8	51	5.5×9×5.1	59	25	25	1,400	2,740	98.0	714	20	
10	74	58	10	60	6.6×11×6.1	82.5			1,560	3,140	157	1,163	25	
10	82	64	10	67	6.6×11×6.1	91			2,490	5,490	297	1,543	30	
13	96	75	13	78	9×14×8.1	100			2,650	6,270	373	2,400	35	
13	101	80	13	83	9×14×8.1	115			3,430	8,040	553	2,510	40	
18	129	100	18	107	11×17×11.1	145	30	30	6,080	15,900	1,370	6,400	50	
18	144	116	18	122	11×17×11.1	155			7,550	20,000	1,800	9,200	60	

1N \approx 0.102kgf 1N·m \approx 0.102kgf·m

TQF-E TYPE

— Round Flange Type with Pilot End —

**part number structure**example **TQF 25 G UU-E-SK**

TQF type

inner contact diameter (dr)

resin retainer

outer cylinder surface treatment
blank: no surface treatment
SK: electroless nickel plating
LF: low temperature black chrome treatment with fluoride coating
SB: black oxide
SC: industrial chrome plating

with pilot end

seal
UU: seals on both sides
ZZ: doublelip-seals on both sides


Doublelip-seal is available for size 6 to 30.

part number*	number of ball circuits	dr tolerance		D tolerance	major dimensions			flange		
		mm	μm		± 0.3 mm	f mm	Df mm	t mm	P.C.D. mm	
TQF16GUU-E	4	16	0/-9	32	0	37	8	54	8	43
TQF20GUU-E	5	20	0	40	-19	42	8	62	8	51
TQF25GUU-E	6	25	-10	45	0	59	10	74	10	60
TQF30GUU-E	6	30	-10	52	-22	64	10	82	10	67
TQF35GUU-E	6	35	0	60		70	13	96	13	78
TQF40GUU-E	6	40	-12	65		80	13	101	13	83

* Seals-on-both-sides is standard.

**TQF16G~25G : M3-1 grease fitting TQF30G~40G : A-M6×1

Surface treatment is optional.

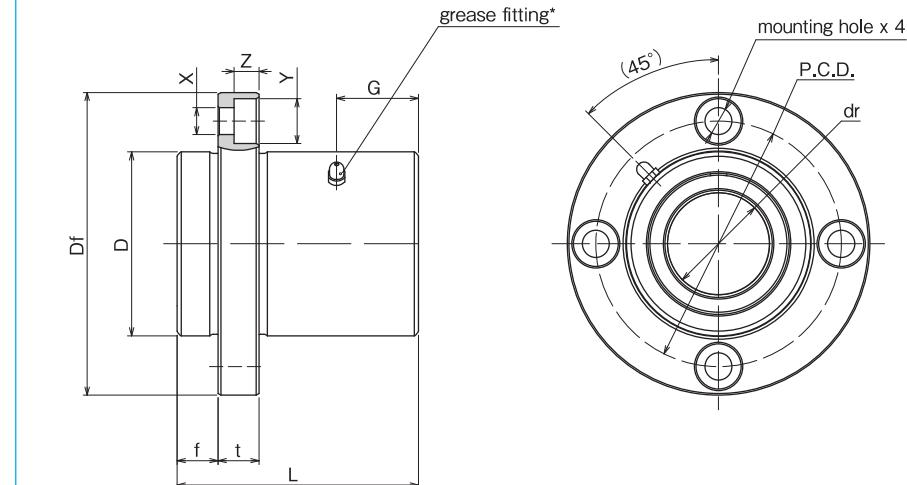

X×Y×Z mm	grease fitting G mm	eccentricity μm	perpendicularity μm	basic load rating dynamic C N	basic load rating static Co N	mass g	shaft diameter mm
5.5×9×5.1	12	12	12	774	1,180	205	16
5.5×9×5.1	14			882	1,370	334	20
6.6×11×6.1	20			980	1,570	568	25
6.6×11×6.1	21			1,570	2,740	737	30
9×14×8.1	23			1,670	3,140	1,170	35
9×14×8.1	27	20	20	2,160	4,020	1,330	40

1N=0.102kgf

TQK-E TYPE

— Square Flange Type with Pilot End —

**part number structure**

example)	TQK	25	G	UU	-E-	SK
TQK type						
inner contact diameter (dr)						
resin retainer						
outer cylinder surface treatment						
blank: no surface treatment						
SK: electroless nickel plating						
LF: low temperature black chrome treatment with fluoride coating						
SB: black oxide						
SC: industrial chrome plating						
with pilot end						
seal						
UU: seals on both sides						
ZZ: doublelip-seals on both sides						


Doublelip-seal is available for size 6 to 30.

part number*	number of ball circuits	dr tolerance mm	tolerance μm	D tolerance mm	± 0.3 μm	major dimensions			flange		
						L mm	f mm	Df mm	K mm	t mm	P.C.D. mm
TQK16GUU-E	4	16	0/-9	32	0	37	8	54	42	8	43
TQK20GUU-E	5	20	0	40	-19	42	8	62	50	8	51
TQK25GUU-E	6	25	0	45	-10	59	10	74	58	10	60
TQK30GUU-E	6	30	0	52	-22	64	10	82	64	10	67
TQK35GUU-E	6	35	0	60		70	13	96	75	13	78
TQK40GUU-E	6	40	-12	65		80	13	101	80	13	83

* Seals-on-both-sides is standard.

**TQK16G~25G : M3-1 grease fitting TQK30G~40G : A-M6×1

Surface treatment is optional.

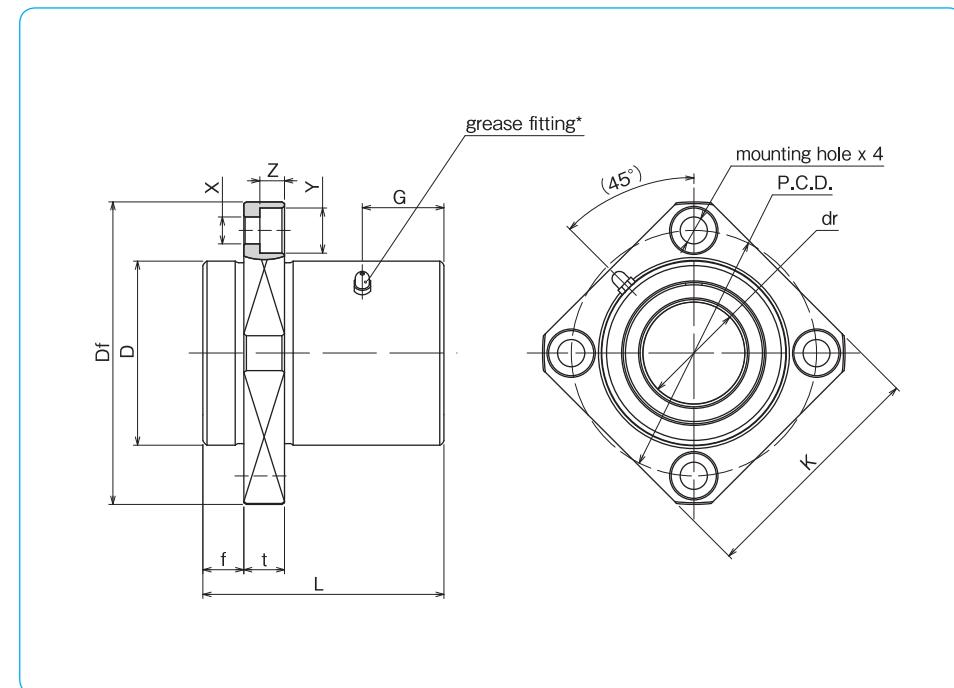

X×Y×Z mm	grease fitting G mm	eccentricity μm	perpendicularity μm	basic load rating dynamic C N	static Co N	mass g	shaft diameter mm
5.5×9×5.1	12	15	15	774	1,180	170	16
5.5×9×5.1				882	1,370	297	20
6.6×11×6.1				980	1,570	490	25
6.6×11×6.1				1,570	2,740	639	30
9×14×8.1				1,670	3,140	989	35
9×14×8.1				2,160	4,020	1,040	40

1N=0.102kgf

TQF-W-E TYPE

— Round Flange Double-Wide Pilot End Type —



part number structure

example TQF 25 G W UU-E-SK									
TQF type		25		G		W		UU	-E-SK
inner contact diameter (dr)									
resin retainer									
double-wide type									
outer cylinder surface treatment blank: no surface treatment SK: electroless nickel plating LF: low temperature black chrome treatment with fluoride coating SB: black oxide SC: industrial chrome plating									
with pilot end									
seal UU: seals on both sides ZZ: doublelip-seals on both sides									


Doublelip-seal is available for size 6 to 30.

part number*	number of ball circuits	dr tolerance mm	mm	D tolerance μm	major dimensions			flange P.C.D. mm		
					L ±0.3 mm	f mm	Df mm	t mm	P.C.D. mm	
TQF16GWUU-E	4	16	0/-9	32	70	8	54	8	43	
TQF20GWUU-E	5	20		40	80	8	62	8	51	
TQF25GWUU-E	6	25		45	112	10	74	10	60	
TQF30GWUU-E	6	30		52	123	10	82	10	67	
TQF35GWUU-E	6	35	0	60	135	13	96	13	78	
TQF40GWUU-E	6	40	-15	65	151	13	101	13	83	

* Seals-on-both-sides is standard.

**TQF16G~25G : M3-1 grease fitting TQF30G~40G : A-M6×1

Surface treatment is optional.

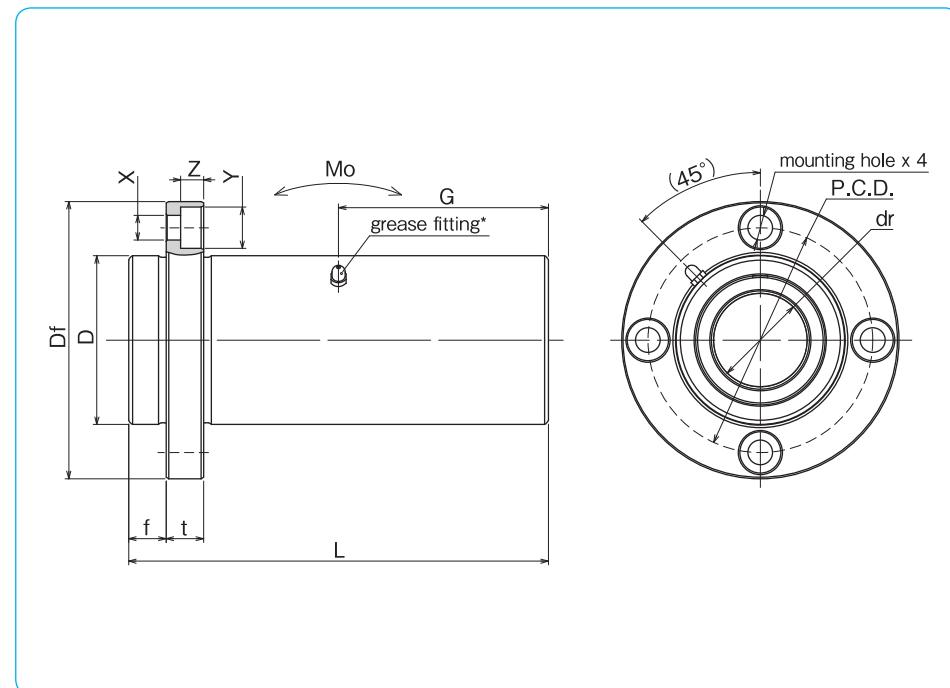

X × Y × Z mm	grease fitting G mm	eccentricity μm	perpendicularity μm	basic load rating dynamic C N	basic load rating static Co N	allowable static moment Mo N·m	mass g	shaft diameter mm
5.5×9×5.1	35	15	15	1,230	2,350	19.7	317	16
5.5×9×5.1	40			1,400	2,740	26.8	552	20
6.6×11×6.1	56		20	1,560	3,140	43.4	916	25
6.6×11×6.1	61.5			2,490	5,490	82.8	1,217	30
9×14×8.1	67.5		25	2,650	6,270	110	1,880	35
9×14×8.1	75.5			3,430	8,040	147	2,140	40

1N=0.102kgf 1N·m=0.102kgf·m

TQK-W-E TYPE

— Square Flange Double-Wide Pilot End Type —



part number structure

example **TQK|25|G|W|UU-E-SK**

TQK type

inner contact diameter (dr)

resin retainer

double-wide type

outer cylinder surface treatment
blank: no surface treatment
SK: electroless nickel plating
LF: low temperature black chrome treatment with fluoride coating
SB: black oxide
SC: industrial chrome plating

with pilot end

seal
UU: seals on both sides
ZZ: doublelip-seals on both sides


Doublelip-seal is available for size 6 to 30.

part number*	number of ball circuits	dr tolerance mm	mm	D tolerance μm	major dimensions			flange P.C.D. mm		
					L ±0.3 mm	f mm	Df mm	K mm	t mm	P.C.D. mm
TQK16GWUU-E	4	16	0/-10	32	0	70	8	54	42	8 43
TQK20GWUU-E	5	20		40	-19	80	8	62	50	8 51
TQK25GWUU-E	6	25		45		112	10	74	58	10 60
TQK30GWUU-E	6	30		52		123	10	82	64	10 67
TQK35GWUU-E	6	35	0	60		135	13	96	75	13 78
TQK40GWUU-E	6	40	-15	65	-22	151	13	101	80	13 83

* Seals-on-both-sides is standard.

**TQK16G~25G : M3-1 grease fitting TQK30G~40G : A-M6×1

Surface treatment is optional.

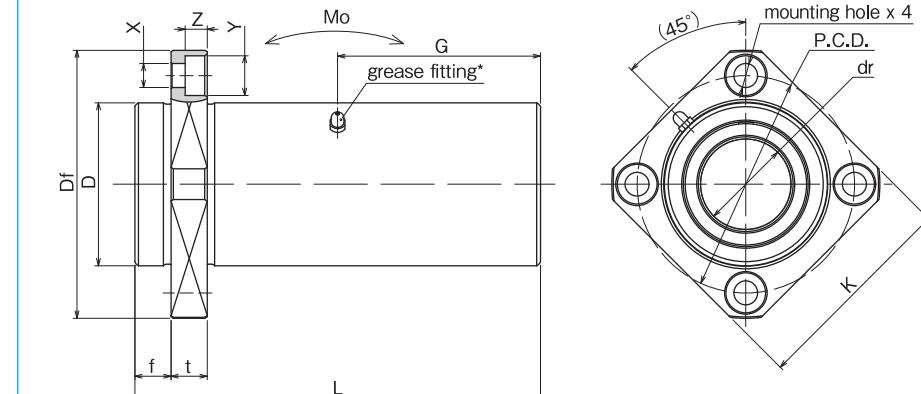

X × Y × Z mm	grease fitting G mm	eccentricity μm	perpendicularity μm	basic load rating dynamic C N	basic load rating static Co N	allowable static moment Mo N·m	mass g	shaft diameter mm
5.5×9×5.1	35	15	15	1,230	2,350	19.7	282	16
5.5×9×5.1	40			1,400	2,740	26.8	515	20
6.6×11×6.1	56		20	1,560	3,140	43.4	838	25
6.6×11×6.1	61.5			2,490	5,490	82.8	1,120	30
9×14×8.1	67.5		25	2,650	6,270	110	1,710	35
9×14×8.1	75.5			3,430	8,040	147	1,960	40

1N=0.102kgf 1N·m=0.102kgf·m

KB TYPE (Euro Standard)



— Standard Type —



part number structure

example	KBS	25	G	UU
specification				
KB: standard				
KBS: anti-corrosion				
inner contact diameter (dr)				
retainer material				
blank: standard/steel				
anti-corrosion/stainless steel				
G: resin				
seal				
blank: without seal				
U: seal on one side				
UU: seals on both sides				

standard		part number		number of ball circuits	dr mm	tolerance μm	major dimensions	
steel retainer	resin retainer	anti-corrosion	stainless retainer				D mm	D ₁ tolerance μm
KB 3	KB 3G	KBS 3	KBS 3G	4	3		7	
KB 4	KB 4G	KBS 4	KBS 4G	4	4		8	0
KB 5	KB 5G	KBS 5	KBS 5G	4	5	+ 8	12	- 8
KB 8	KB 8G	KBS 8	KBS 8G	4	8	0	16	
KB10	KB10G	KBS10	KBS10G	4	10		19	
KB12	KB12G	KBS12	KBS12G	4	12		22	0
KB16	KB16G	KBS16	KBS16G	4	16	+ 9	26	- 9
KB20	KB20G	KBS20	KBS20G	5	20	- 1	32	0
KB25	KB25G	KBS25	KBS25G	6	25	+11	40	-11
KB30	KB30G	KBS30	KBS30G	6	30	- 1	47	
KB40	KB40G	KBS40	KBS40G	6	40		62	0
KB50	KB50G	KBS50	KBS50G	6	50	+13	75	-13
KB60	KB60G	KBS60	KBS60G	6	60	- 2	90	0
KB80	-	-	-	6	80	+16/-4	120	-15

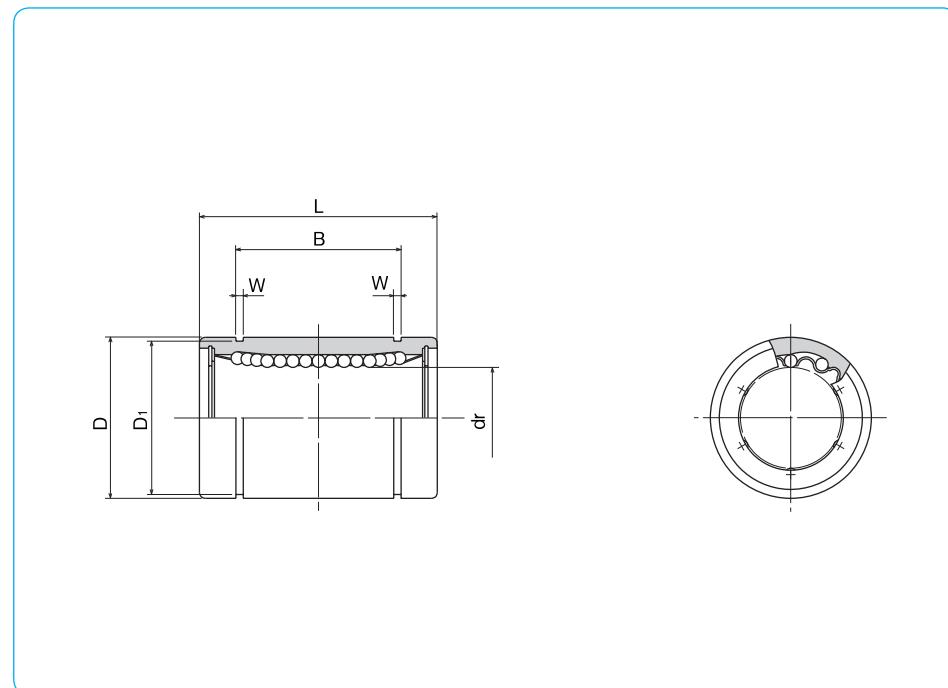

L mm	B mm	W mm	D mm	D ₁ mm	eccentricity μm	radial clearance (maximum) μm	basic load rating dynamic C N	basic load rating static Co N	mass g	shaft diameter mm
10	0	-	-	-	10	- 3	69	105	1.4	3
12	-0.12	-	-	-			88	127	2	4
22		14.5		1.1			206	265	11	5
25		16.5		1.1	15.2	12	265	402	22	8
29	0	22		1.3	12	- 4	372	549	36	10
32	-0.2	22.9		1.3			510	784	45	12
36		24.9		1.3			578	892	60	16
45		31.5		1.6	30.3	15	862	1,370	102	20
58		44.1		1.85	17	- 6	980	1,570	235	25
68	0	52.1		1.85			1,570	2,740	360	30
80	-0.3	60.6		2.15			2,160	4,020	770	40
100		77.6		2.65	72		3,820	7,940	1,250	50
125	0	101.7	0	3.15	20	-13	4,700	9,800	2,220	60
165	-0.4	133.7	-0.4	4.15			7,350	16,000	5,140	80

1N=0.102kgf



KB-AJ TYPE (Euro Standard)

— Clearance Adjustable Type —



part number structure

example	KBS	25	G	UU	-AJ
specification					
KB: standard					
KBS: anti-corrosion					
inner contact diameter (dr)					
retainer material					
blank: standard/steel					
anti-corrosion/stainless steel					
G: resin					
seal					
blank: without seal					
U: seal on one side					
UU: seals on both sides					

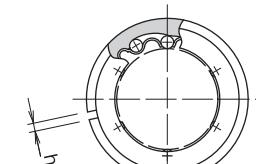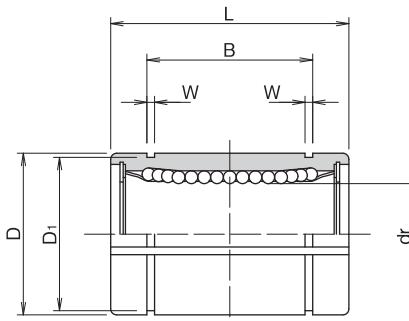


steel retainer	part number		number of ball circuits	major dimensions		D tolerance*
	standard	anti-corrosion		dr tolerance*	mm	
—	KB 5G-AJ	—	KBS 5G-AJ	4	5	+ 8
—	KB 8G-AJ	—	KBS 8G-AJ	4	8	0
—	KB10G-AJ	—	KBS10G-AJ	4	10	+ 9
KB12-AJ	KB12G-AJ	KBS12-AJ	KBS12G-AJ	4	12	22
KB16-AJ	KB16G-AJ	KBS16-AJ	KBS16G-AJ	4	16	+ 9
KB20-AJ	KB20G-AJ	KBS20-AJ	KBS20G-AJ	5	20	— 1
KB25-AJ	KB25G-AJ	KBS25-AJ	KBS25G-AJ	6	25	+11
KB30-AJ	KB30G-AJ	KBS30-AJ	KBS30G-AJ	6	30	— 1
KB40-AJ	KB40G-AJ	KBS40-AJ	KBS40G-AJ	6	40	+13
KB50-AJ	KB50G-AJ	KBS50-AJ	KBS50G-AJ	6	50	— 2
KB60-AJ	KB60G-AJ	KBS60-AJ	KBS60G-AJ	6	60	90
KB80-AJ	—	—	—	6	80	+16/-4

* Accuracy is measured prior to machining clearance slit.




L tolerance mm	B tolerance mm	W mm	D1 mm	h mm	eccentricity* μm	basic load rating dynamic C N	basic load rating static Co N	mass g	shaft diameter mm
22	0	14.5	1.1	11.5	1	206	265	10	5
		16.5		15.2	1		265	402	19.5
		22		18	1		372	549	29
		22.9		21	1.5		510	784	44
29	-0.2	24.9	1.3	24.9	1.5	578	892	59	16
		31.5		30.3	2		862	1,370	100
		44.1	1.85	37.5	2		980	1,570	230
		52.1		44.5	2		1,570	2,740	355
32	-0.3	60.6	2.15	59	3	17	2,160	4,020	758
		77.6		72	3		3,820	7,940	1,230
		101.7		86.5	3		4,700	9,800	2,170
		133.7		116	3		7,350	16,000	5,000
36	0	101.7	3.15	86.5	3	20	1N = 0.102kgf		
		133.7		116	3		1N = 0.102kgf		
45	-0.4	133.7	4.15	116	3		1N = 0.102kgf		
		133.7		116	3		1N = 0.102kgf		
58	0	133.7	4.15	116	3	20	1N = 0.102kgf		
		133.7		116	3		1N = 0.102kgf		
68	-0.3	133.7	4.15	116	3	20	1N = 0.102kgf		
		133.7		116	3		1N = 0.102kgf		
80	-0.3	133.7	4.15	116	3	20	1N = 0.102kgf		
		133.7		116	3		1N = 0.102kgf		
100	-0.3	133.7	4.15	116	3	20	1N = 0.102kgf		
		133.7		116	3		1N = 0.102kgf		
125	0	133.7	4.15	116	3	20	1N = 0.102kgf		
		133.7		116	3		1N = 0.102kgf		
165	-0.4	133.7	4.15	116	3	20	1N = 0.102kgf		
		133.7		116	3		1N = 0.102kgf		

KB-OP TYPE (Euro Standard)

— Open Type —

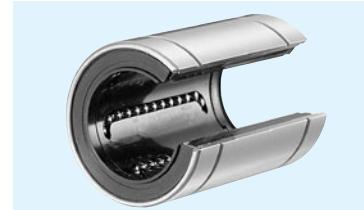

part number structure

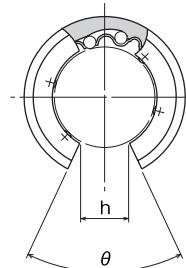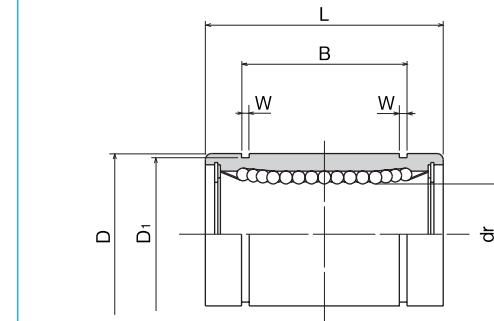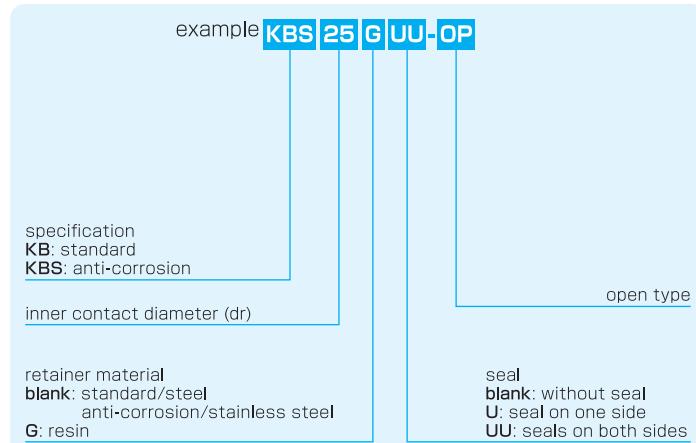

	part number		number of ball circuits	dr tolerance*		major dimensions	
	standard steel retainer	anti-corrosion resin retainer		mm	μm	mm	μm
—	KB10G-OP	—	KBS10G-OP	3	10	+ 8	19
KB12-OP	KB12G-OP	KBS12-OP	KBS12G-OP	3	12	0	22
KB16-OP	KB16G-OP	KBS16-OP	KBS16G-OP	3	16	+ 9	26
KB20-OP	KB20G-OP	KBS20-OP	KBS20G-OP	4	20	- 1	32
KB25-OP	KB25G-OP	KBS25-OP	KBS25G-OP	5	25	+ 11	40
KB30-OP	KB30G-OP	KBS30-OP	KBS30G-OP	5	30	- 1	47
KB40-OP	KB40G-OP	KBS40-OP	KBS40G-OP	5	40	+ 13	62
KB50-OP	KB50G-OP	KBS50-OP	KBS50G-OP	5	50	- 2	75
KB60-OP	KB60G-OP	KBS60-OP	KBS60G-OP	5	60		90
KB80-OP	—	—	—	5	80	+16/-4	120

* Accuracy is measured prior to machining open slit.

L mm	tolerance mm	B mm	tolerance mm	W mm	D1 mm	h mm	θ	eccentricity* μm	basic load rating dynamic C N	static Co N	mass g	shaft diameter mm
29	0	22	0	1.3	18	6.8	80°	12	372	549	23	10
32		22.9		1.3	21	7.5	78°		510	784	35	12
36		24.9		1.3	24.9	10	78°		578	892	48	16
45		31.5		1.6	30.3	10	60°		862	1,370	84	20
58	0	44.1	0	1.85	37.5	12.5	60°	15	980	1,570	195	25
68		52.1		1.85	44.5	12.5	50°		1,570	2,740	309	30
80		60.6		2.15	59	16.8	50°		2,160	4,020	665	40
100		77.6		2.65	72	21	50°		3,820	7,940	1,080	50
125	0	101.7	0	3.15	86.5	27.2	54°	20	4,700	9,800	1,900	60
165	-0.4	133.7	-0.4	4.15	116	36.3	54°		7,350	16,000	4,380	80

1N=0.102kgf


KB-W TYPE (Euro Standard)

— Double-Wide Type —



part number structure

example	KBS	25	G	W	UU
specification KB: standard KBS: anti-corrosion					
inner contact diameter (dr)					
seal blank: without seal UU: seals on both sides					
retainer material blank: standard/steel anti-corrosion/stainless steel					
G: resin					
double-wide type					

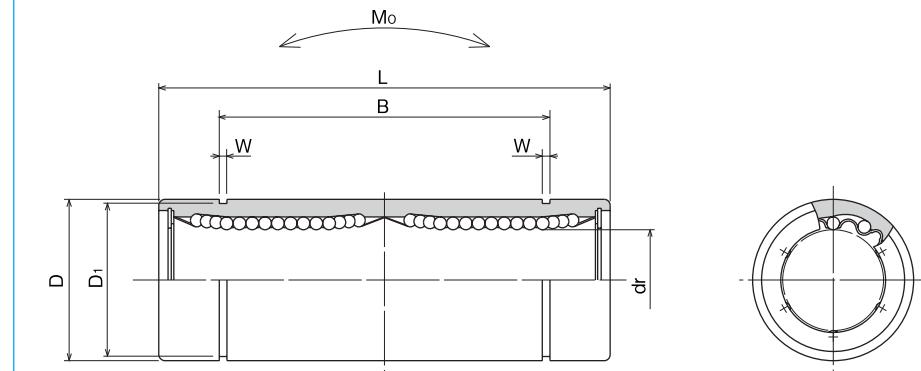

part number				number of ball circuits	dr		major dimensions	
standard steel retainer	resin retainer	anti-corrosion stainless retainer	resin retainer		mm	tolerance μm	mm	tolerance μm
KB 8W	KB 8GW	KBS 8W	KBS 8GW	4	8	+ 9	16	0/-9
KB12W	KB12GW	KBS12W	KBS12GW	4	12	- 1	22	0
KB16W	KB16GW	KBS16W	KBS16GW	4	16	+11	26	-11
KB20W	KB20GW	KBS20W	KBS20GW	5	20	- 1	32	
KB25W	KB25GW	KBS25W	KBS25GW	6	25	+13	40	0
KB30W	KB30GW	KBS30W	KBS30GW	6	30	- 2	47	-13
KB40W	KB40GW	KBS40W	KBS40GW	6	40		62	0
KB50W	KB50GW	KBS50W	KBS50GW	6	50	+16	75	-15
KB60W	KB60GW	KBS60W	KBS60GW	6	60	- 4	90	0/-20

L mm	tolerance mm	B mm	tolerance mm	W mm	D1 mm	eccentricity μm	basic load rating dynamic C N	load rating static Co N	allowable static moment Mo N · m	mass g	shaft diameter mm
46	0 -0.3	33	0 -0.3	1.1	15.2	15	421	804	4.3	40	8
61		45.8		1.3	21		813	1,570	11.7	80	12
68		49.8		1.3	24.9		921	1,780	14.2	115	16
80		61		1.6	30.5		1,370	2,740	25.0	180	20
112	0 -0.4	82	0 -0.4	1.85	38	17	1,570	3,140	44.0	430	25
123		104.2		1.85	44.5		2,500	5,490	78.9	615	30
151		121.2		2.15	59		3,430	8,040	147	1,400	40
192		155.2		2.65	72		6,080	15,900	396	2,320	50
209		170		3.15	86.5		7,550	20,000	487	3,920	60

1N ≈ 0.102kgf 1N · m ≈ 0.102kgf · m

KBF TYPE (Euro Standard)

— Round Flange Type —




part number structure

example **KBSF | 25 | G | UU - SK**specification
KBF: standard
KBSF: anti-corrosion

inner contact diameter (dr)

outer cylinder surface treatment
blank: no surface treatment
SK: electroless nickel plating
LF: low temperature black chrome treatment with fluoride coating
SB: black oxide (not available on anti-corrosion type)
SC: industrial chrome platingretainer material
blank: standard/steel
anti-corrosion/stainless steel
G: resinseal
blank: without seal
UU: seals on both sides

part number				number of ball circuits	dr tolerance	major dimensions		
standard	anti-corrosion	stainless	resin retainer			mm	μm	L ±0.3 mm
steel retainer	resin retainer	stainless retainer	resin retainer	mm	μm	mm	μm	mm
—	KBF 5G	—	KBSF 5G	4	5	+ 8	0	22
KBF 8	KBF 8G	KBSF 8	KBSF 8G	4	8	16	-13	25
KBF12	KBF12G	KBSF12	KBSF12G	4	12	22	0	32
KBF16	KBF16G	KBSF16	KBSF16G	4	16	26	-16	36
KBF20	KBF20G	KBSF20	KBSF20G	5	20	32	0	45
KBF25	KBF25G	KBSF25	KBSF25G	6	25	40	0	58
KBF30	KBF30G	KBSF30	KBSF30G	6	30	47	-19	68
KBF40	KBF40G	KBSF40	KBSF40G	6	40	62	0	80
KBF50	KBF50G	KBSF50	KBSF50G	6	50	75	-22	100
KBF60	KBF60G	KBSF60	KBSF60G	6	60	90	0	125
KBF80	—	—	—	6	80	+16/-4	-25	165

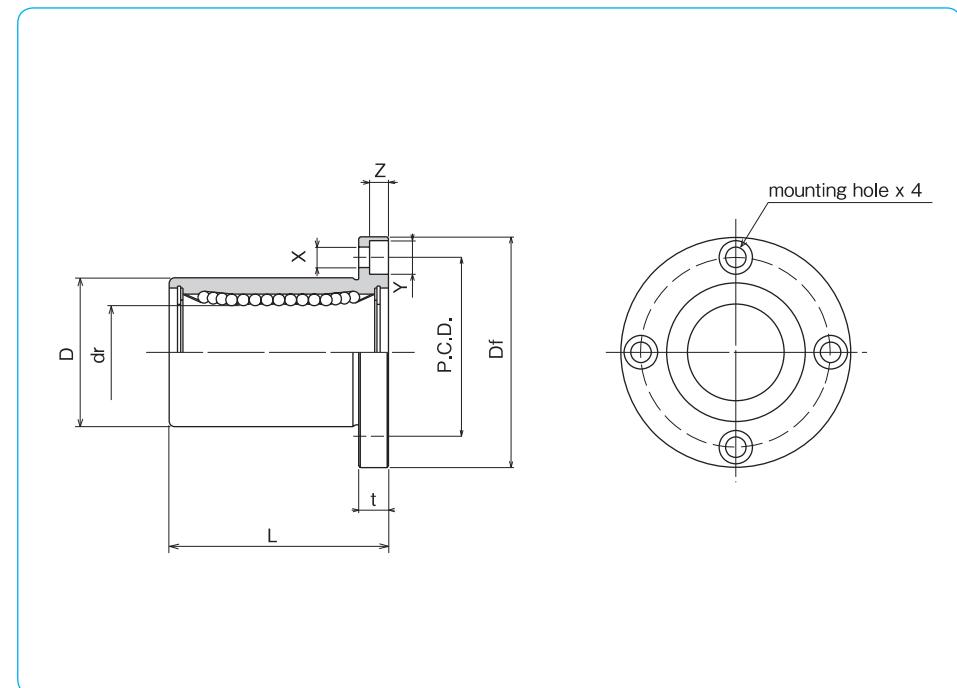

Df mm	t mm	flange P.C.D. mm	X×Y×Z mm	eccentricity μm	perpendicularity μm	basic load rating dynamic C N	static Co N	mass g	shaft diameter mm
28	5	20	3.5×6×3.1	12	12	206	265	26	5
32	5	24	3.5×6×3.1			265	402	41	8
42	6	32	4.5×7.5×4.1			510	784	80	12
46	6	36	4.5×7.5×4.1			578	892	103	16
54	8	43	5.5×9×5.1	15	15	862	1,370	182	20
62	8	51	5.5×9×5.1			980	1,570	335	25
76	10	62	6.6×11×6.1			1,570	2,740	560	30
98	13	80	9×14×8.1			2,160	4,020	1,175	40
112	13	94	9×14×8.1	17	17	3,820	7,940	1,745	50
134	18	112	11×17×11.1			4,700	9,800	3,220	60
164	18	142	11×17×11.1			7,350	16,000	6,420	80

1N ≈ 0.102kgf

KBK TYPE (Euro Standard)

— Square Flange Type —




part number structure

example **KBSK 25 G UU-SK**specification
KBK: standard
BKS: anti-corrosion

inner contact diameter (dr)

outer cylinder surface treatment
blank: no surface treatment
SK: electroless nickel plating
LF: low temperature black chrome treatment with fluoride coating
SB: black oxide (not available on anti-corrosion type)
SC: industrial chrome platingretainer material
blank: standard/steel
anti-corrosion/stainless steel
G: resinseal
blank: without seal
UU: seals on both sides

part number				number of ball circuits	dr tolerance	major dimensions		
standard steel retainer	resin retainer	anti-corrosion stainless retainer	resin retainer			mm	μm	L ±0.3 mm
—	KBK 5G	—	KBSK 5G	4	5	+ 8	0	22
KBK 8	KBK 8G	KBSK 8	KBSK 8G	4	8	0		25
KBK12	KBK12G	KBSK12	KBSK12G	4	12	22	0	32
KBK16	KBK16G	KBSK16	KBSK16G	4	16	+ 9	26	36
KBK20	KBK20G	KBSK20	KBSK20G	5	20	- 1	32	45
KBK25	KBK25G	KBSK25	KBSK25G	6	25	+11	40	58
KBK30	KBK30G	KBSK30	KBSK30G	6	30	- 1	47	68
KBK40	KBK40G	KBSK40	KBSK40G	6	40	+13	62	80
KBK50	KBK50G	KBSK50	KBSK50G	6	50	- 2	75	100
KBK60	KBK60G	KBSK60	KBSK60G	6	60		90	125
KBK80	—	—	—	6	80	+16/-4	120	165

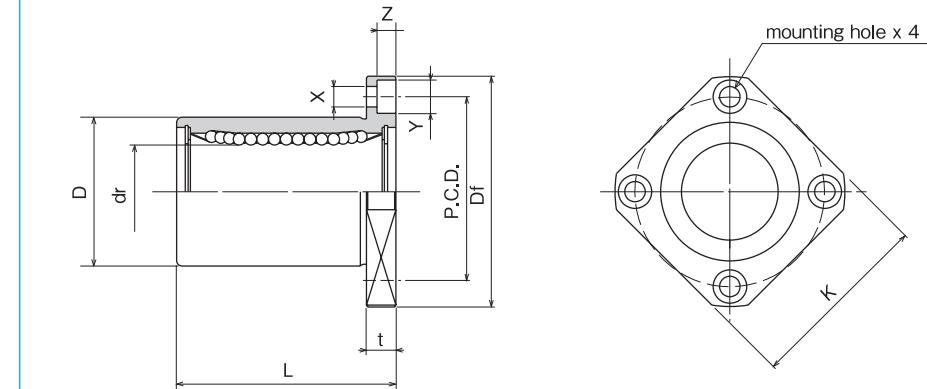

Df mm	K mm	t mm	flange P.C.D. mm	X×Y×Z mm	eccentricity μm	perpendicularity μm	basic load rating dynamic C N	basic load rating static Co N	mass g	shaft diameter mm
28	22	5	20	3.5×6×3.1	12	12	206	265	20	5
32	25	5	24	3.5×6×3.1			265	402	33	8
42	32	6	32	4.5×7.5×4.1			510	784	64	12
46	35	6	36	4.5×7.5×4.1			578	892	90	16
54	42	8	43	5.5×9×5.1	15	15	862	1,370	147	20
62	50	8	51	5.5×9×5.1			980	1,570	295	25
76	60	10	62	6.6×11×6.1			1,570	2,740	465	30
98	75	13	80	9×14×8.1			2,160	4,020	975	40
112	88	13	94	9×14×8.1	17	17	3,820	7,940	1,545	50
134	106	18	112	11×17×11.1			4,700	9,800	2,780	60
164	136	18	142	11×17×11.1			7,350	16,000	5,920	80

1N ≈ 0.102kgf

KBF-W TYPE (Euro Standard)

— Round Flange Double-Wide Type —




part number structure

example	KBSF	25	G	W	UU	-SK
specification	KBF: standard					
	KBSF: anti-corrosion					
inner contact diameter (dr)						
retainer material	blank: standard/steel					
	anti-corrosion/stainless steel					
G: resin						
double-wide type						

outer cylinder surface treatment
blank: no surface treatment
SK: electroless nickel plating
LF: low temperature black chrome treatment with fluoride coating
SB: black oxide (not available on anti-corrosion type)
SC: industrial chrome plating

seal
blank: without seal
UU: seals on both sides

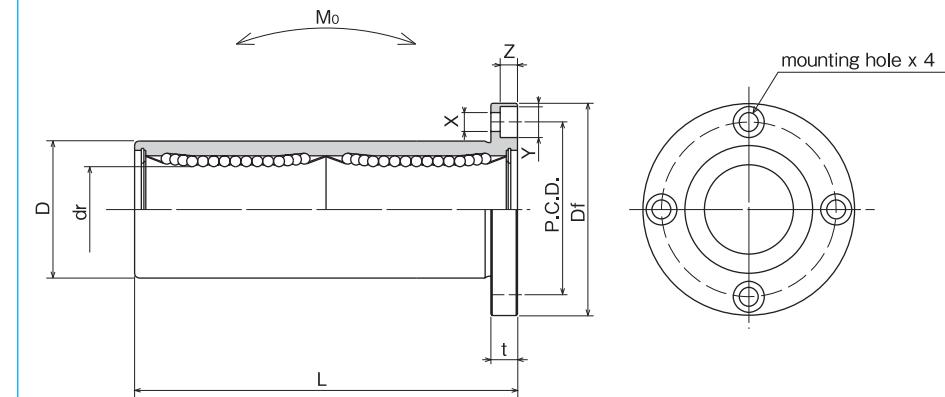

steel retainer	resin retainer	part number		number of ball circuits	dr tolerance		major dimensions	
		standard	anti-corrosion		mm	μm	mm	tolerance
KBF 8W	KBF 8GW	KBSF 8W	KBSF 8GW	4	8	+ 9	16	0/-13 ±0.3 mm
KBF12W	KBF12GW	KBSF12W	KBSF12GW	4	12	- 1	22	0 61
KBF16W	KBF16GW	KBSF16W	KBSF16GW	4	16	+11	26	-16 68
KBF20W	KBF20GW	KBSF20W	KBSF20GW	5	20	- 1	32	0 80
KBF25W	KBF25GW	KBSF25W	KBSF25GW	6	25	+13	40	0 112
KBF30W	KBF30GW	KBSF30W	KBSF30GW	6	30	- 2	47	-19 123
KBF40W	KBF40GW	KBSF40W	KBSF40GW	6	40		62	0 151
KBF50W	KBF50GW	KBSF50W	KBSF50GW	6	50	+16	75	-22 192
KBF60W	KBF60GW	KBSF60W	KBSF60GW	6	60	- 4	90	0/-25 209

Df mm	t mm	flange P.C.D. mm	X×Y×Z mm	eccentricity μm	perpendicularity μm	basic load rating		allowable static moment Mo N·m	mass g	shaft diameter mm
						dynamic C N	static Co N			
32	5	24	3.5×6×3.1	15	15	421	804	4.3	59	8
42	6	32	4.5×7.5×4.1			813	1,570	11.7	110	12
46	6	36	4.5×7.5×4.1			921	1,780	14.2	160	16
54	8	43	5.5×9×5.1	17	17	1,370	2,740	25.0	260	20
62	8	51	5.5×9×5.1			1,570	3,140	44.0	540	25
76	10	62	6.6×11×6.1			2,500	5,490	78.9	815	30
98	13	80	9×14×8.1			3,430	8,040	147	1,805	40
112	13	94	9×14×8.1	20	20	6,080	15,900	396	2,820	50
134	18	112	11×17×11.1			7,550	20,000	487	4,920	60

1N ≈ 0.102kgf 1N · m ≈ 0.102kgf · m

KBK-W TYPE (Euro Standard)


— Square Flange Double-Wide Type —



part number structure

example	KBSK	25	G	W	UU	-SK
specification	KBK:	standard				
	KBSK:	anti-corrosion				
inner contact diameter (dr)						
retainer material	blank:	standard/steel				
		anti-corrosion/stainless steel				
G: resin						
	double-wide type					
seal	blank:	without seal				
	UU:	seals on both sides				

part number		standard		anti-corrosion		number of ball circuits	dr mm	tolerance μm	major dimensions	
steel retainer	resin retainer	stainless retainer	resin retainer						D mm	tolerance μm
KBK 8W	KBK 8GW	KBSK 8W	KBSK 8GW	4	8	+ 9	16	0/-13	46	
KBK12W	KBK12GW	KBSK12W	KBSK12GW	4	12	- 1	22	0	61	
KBK16W	KBK16GW	KBSK16W	KBSK16GW	4	16	+11	26	-16	68	
KBK20W	KBK20GW	KBSK20W	KBSK20GW	5	20	- 1	32	0	80	
KBK25W	KBK25GW	KBSK25W	KBSK25GW	6	25	+13	40	-19	112	
KBK30W	KBK30GW	KBSK30W	KBSK30GW	6	30	- 2	47		123	
KBK40W	KBK40GW	KBSK40W	KBSK40GW	6	40		62	0	151	
KBK50W	KBK50GW	KBSK50W	KBSK50GW	6	50		75	-22	192	
KBK60W	KBK60GW	KBSK60W	KBSK60GW	6	60		90	0/-25	209	

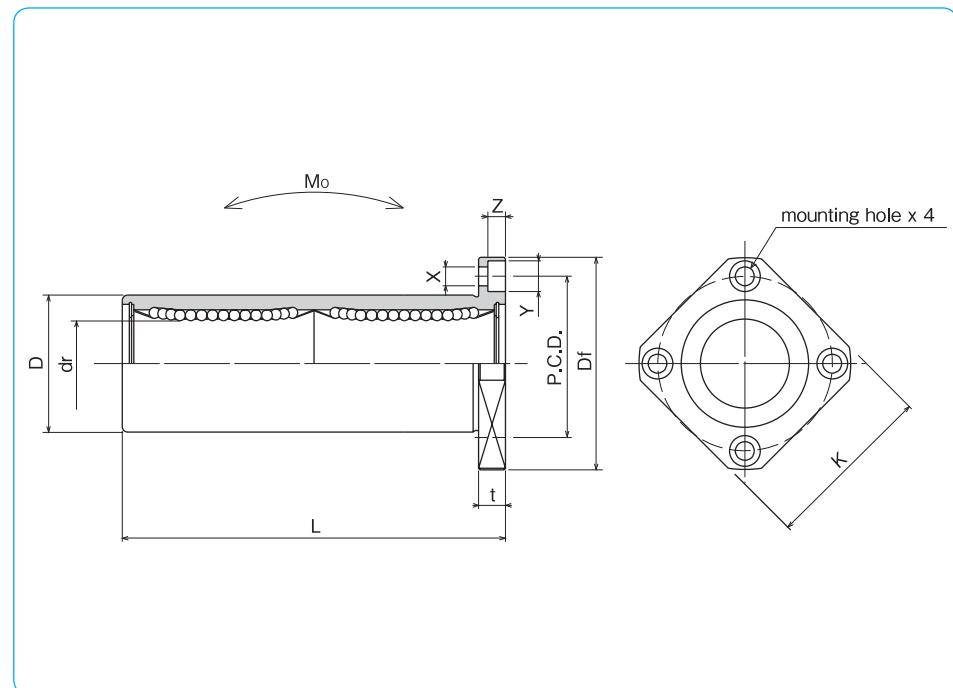

Df mm	K mm	t mm	flange			eccentricity μm	perpendicularity μm	basic load rating dynamic C N	basic load rating static Co N	allowable static moment Mo N · m	mass g	shaft diameter mm
			P.C.D. mm	X × Y × Z mm								
32	25	5	24	3.5×6×3.1		15	15	421	804	4.3	51	8
42	32	6	32	4.5×7.5×4.1				813	1,570	11.7	90	12
46	35	6	36	4.5×7.5×4.1				921	1,780	14.2	135	16
54	42	8	43	5.5×9×5.1				1,370	2,740	25.0	225	20
62	50	8	51	5.5×9×5.1		17	17	1,570	3,140	44.0	500	25
76	60	10	62	6.6×11×6.1				2,500	5,490	78.9	720	30
98	75	13	80	9×14×8.1				3,430	8,040	147	1,600	40
112	88	13	94	9×14×8.1		20	20	6,080	15,900	396	2,620	50
134	106	18	112	11×17×11.1				7,550	20,000	487	4,480	60

1N ≈ 0.102kgf 1N · m ≈ 0.102kgf · m


KBFC TYPE (Euro Standard)

– Center Mount Round Flange Type –



part number structure

example	KBSFC	25	G	UU	-SK
specification	KBFC:	standard			
	KBSFC:	anti-corrosion			
inner contact diameter (dr)					
retainer material	blank:	standard/steel			
		anti-corrosion/stainless steel			
G: resin					
seal	blank:	without seal			
	UU:	seals on both sides			

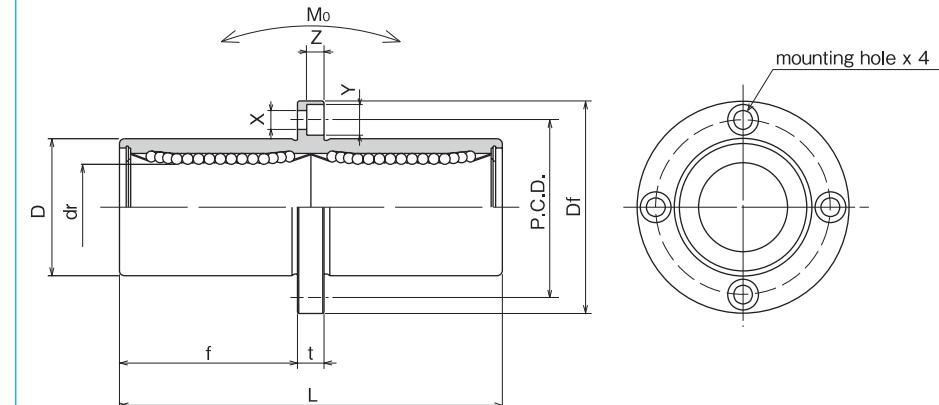

steel retainer	resin retainer	part number		number of ball circuits	dr mm	tolerance μm	major dimensions	
		standard	anti-corrosion				D tolerance μm	L ± 0.3 mm
KBFC 8	KBFC 8G	KBSFC 8	KBSFC 8G	4	8	+ 9	16	0/-13 46
KBFC12	KBFC12G	KBSFC12	KBSFC12G	4	12	- 1	22	0 61
KBFC16	KBFC16G	KBSFC16	KBSFC16G	4	16	+11	26	-16 68
KBFC20	KBFC20G	KBSFC20	KBSFC20G	5	20	- 1	32	0 80
KBFC25	KBFC25G	KBSFC25	KBSFC25G	6	25	+13	40	0 112
KBFC30	KBFC30G	KBSFC30	KBSFC30G	6	30	- 2	47	-19 123
KBFC40	KBFC40G	KBSFC40	KBSFC40G	6	40		62	0 151
KBFC50	KBFC50G	KBSFC50	KBSFC50G	6	50	+16	75	-22 192
KBFC60	KBFC60G	KBSFC60	KBSFC60G	6	60	- 4	90	0/-25 209

f mm	Df mm	t mm	P.C.D. mm	X×Y×Z mm	eccentricity μm	perpendicularity μm	basic load rating			mass g	shaft diameter mm
							dynamic C N	static Co N	allowable static moment Mo N·m		
20.5	32	5	24	3.5×6×3.1	15	15	421	804	4.3	59	8
27.5	42	6	32	4.5×7.5×4.1			813	1,570	11.7	110	12
31	46	6	36	4.5×7.5×4.1	17	17	921	1,780	14.2	160	16
36	54	8	43	5.5×9×5.1			1,370	2,740	25.0	260	20
52	62	8	51	5.5×9×5.1	17	17	1,570	3,140	44.0	540	25
56.5	76	10	62	6.6×11×6.1			2,500	5,490	78.9	815	30
69	98	13	80	9×14×8.1	20	20	3,430	8,040	147	1,805	40
89.5	112	13	94	9×14×8.1			6,080	15,900	396	2,820	50
95.5	134	18	112	11×17×11.1	25	25	7,550	20,000	487	4,920	60

1N = 0.102kgf 1N · m = 0.102kgf · m


KBKC TYPE (Euro Standard)

– Center Mount Square Flange Type –



part number structure

example	KBSKC 25 G UU-SK
specification	
KBKC: standard KBSKC: anti-corrosion	
inner contact diameter (dr)	
retainer material	
blank: standard/steel anti-corrosion/stainless steel	
G: resin	
outer cylinder surface treatment	
blank: no surface treatment SK: electroless nickel plating LF: low temperature black chrome treatment with fluoride coating SB: black oxide (not available on anti-corrosion type) SC: industrial chrome plating	
seal	
blank: without seal UU: seals on both sides	

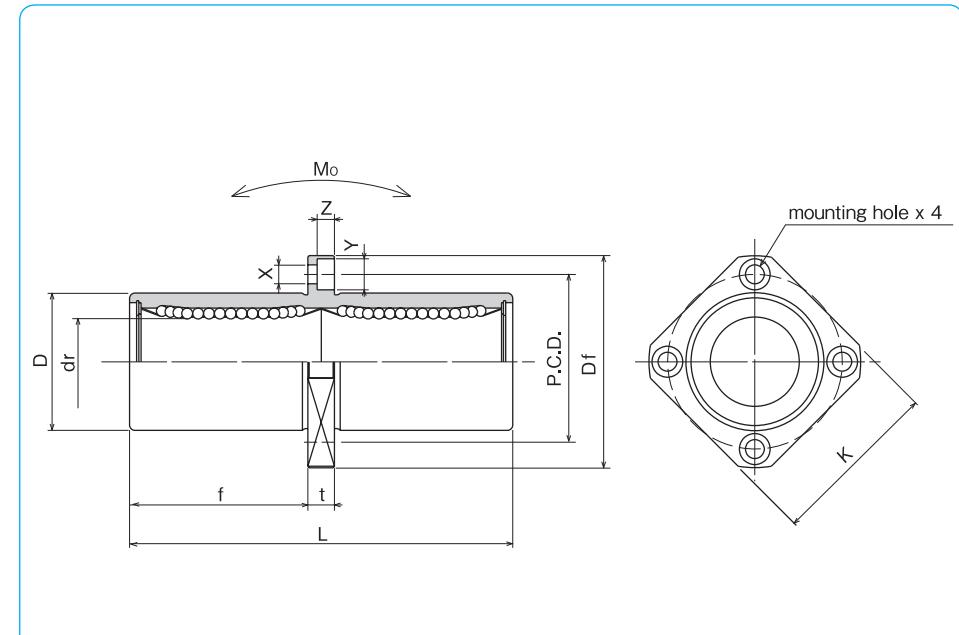

part number		standard		anti-corrosion		number of ball circuits	dr tolerance		major dimensions	
steel retainer	resin retainer	stainless retainer	resin retainer	mm	μm		mm	μm	mm	μm
KBKC 8	KBKC 8G	KBSKC 8	KBSKC 8G	4	8	+ 9	16	0/-13	46	
KBKC12	KBKC12G	KBSKC12	KBSKC12G	4	12	- 1	22	0	61	
KBKC16	KBKC16G	KBSKC16	KBSKC16G	4	16	+11	26	-16	68	
KBKC20	KBKC20G	KBSKC20	KBSKC20G	5	20	- 1	32	0	80	
KBKC25	KBKC25G	KBSKC25	KBSKC25G	6	25	+13	40	-19	112	
KBKC30	KBKC30G	KBSKC30	KBSKC30G	6	30	- 2	47		123	
KBKC40	KBKC40G	KBSKC40	KBSKC40G	6	40	+16	62	0	151	
KBKC50	KBKC50G	KBSKC50	KBSKC50G	6	50	- 4	75	-22	192	
KBKC60	KBKC60G	KBSKC60	KBSKC60G	6	60		90	0/-25	209	

f mm	Df mm	K mm	t mm	flange		X×Y×Z mm	eccentricity μm	perpendicularity μm	basic load rating dynamic C N	basic load rating static Co N	allowable moment Mo N·m	mass g	shaft diameter mm
				P.C.D. mm	X×Y×Z mm								
20.5	32	25	5	24	3.5×6×3.1	15	15	421	804	4.3	51	8	
27.5	42	32	6	32	4.5×7.5×4.1			813	1,570	11.7	90	12	
31	46	35	6	36	4.5×7.5×4.1			921	1,780	14.2	135	16	
36	54	42	8	43	5.5×9×5.1			1,370	2,740	25.0	225	20	
52	62	50	8	51	5.5×9×5.1	17	17	1,570	3,140	44.0	500	25	
56.5	76	60	10	62	6.6×11×6.1			2,500	5,490	78.9	720	30	
69	98	75	13	80	9×14×8.1			3,430	8,040	147	1,600	40	
89.5	112	88	13	94	9×14×8.1			6,080	15,900	396	2,620	50	
95.5	134	106	18	112	11×17×11.1	25	25	7,550	20,000	487	4,480	60	

1N = 0.102kgf 1N · m = 0.102kgf · m

SW TYPE (Inch Standard)

— Standard Type —




part number structure

example	SWS 16 G R UU-P	
specification		
SW: standard		
SWS: anti-corrosion		
size		
retainer material		
blank: standard/steel		
anti-corrosion/stainless steel		
G: resin		
accuracy grade		
blank: high		
P: precision		
* Precision grade is not available for the self-aligning type.		
seal		
blank: without seal		
U: seal on one side		
UU: seals on both sides		
*Seals are not available on SWS2 and SWS3.		
self aligning		
blank: non self aligning		
R: self aligning *		

※Self-aligning is available only with resin retainer for size 4 to 32 of carbon steel cylinder.

steel retainer	partnumber		number of ball circuits	majordimensions		D inch (mm)	D inch (mm)	
	standard resinretainer	anti-corrosion stainless retainer		inch (mm)	dr tolerance precision			
-	-	-	SWS2	SWS2G	4	.1250 (3.175)	0 (7.938)	0 (-0.00040)
-	-	-	SWS3	SWS3G	4	.1875 (4.763)	-.00035 (-8)	.3750 (9.525)
SW4	SW4G	SW4GR	SWS4	SWS4G	4	.2500 (6.350)	.5000 (12.700)	0 (-0.0045 (-11))
SW6	SW6G	SW6GR	SWS6	SWS6G	4	.3750 (9.525)	.6250 (15.875)	0 (-0.00040 (-9))
SW8	SW8G	SW8GR	SWS8	SWS8G	4	.5000 (12.700)	.8750 (22.225)	0 (-0.00050 (-13))
SW10	SW10G	SW10GR	SWS10	SWS10G	4	.625 (15.875)	1.1250 (28.575)	0 (-0.00065 (-16))
SW12	SW12G	SW12GR	SWS12	SWS12G	5	.7500 (19.050)	1.2500 (31.750)	0 (-0.00030 (-10))
SW16	SW16G	SW16GR	SWS16	SWS16G	6	1.0000 (25.400)	1.5625 (39.688)	0 (-0.00040 (-15))
SW20	SW20G	SW20GR	SWS20	SWS20G	6	1.2500 (31.750)	2.0000 (50.800)	0 (-0.00075 (-19))
SW24	SW24G	SW24GR	SWS24	SWS24G	6	1.5000 (38.100)	2.3750 (60.325)	0 (-0.00035 (-12))
SW32	SW32G	SW32GR	SWS32	SWS32G	6	2.0000 (50.800)	3.0000 (76.200)	0 (-0.00090 (-22))
SW40	-	-	-	-	6	2.5000 (63.500)	3.7500 (95.250)	0 (-0.00040 (-9))
SW48	-	-	-	-	6	3.0000 (76.200)	4.50000 (114.300)	0 (-0.00080 (-20))
SW64	-	-	-	-	6	4.0000 (101.600)	6.0000 (152.400)	0 (-0.0100 (-25))

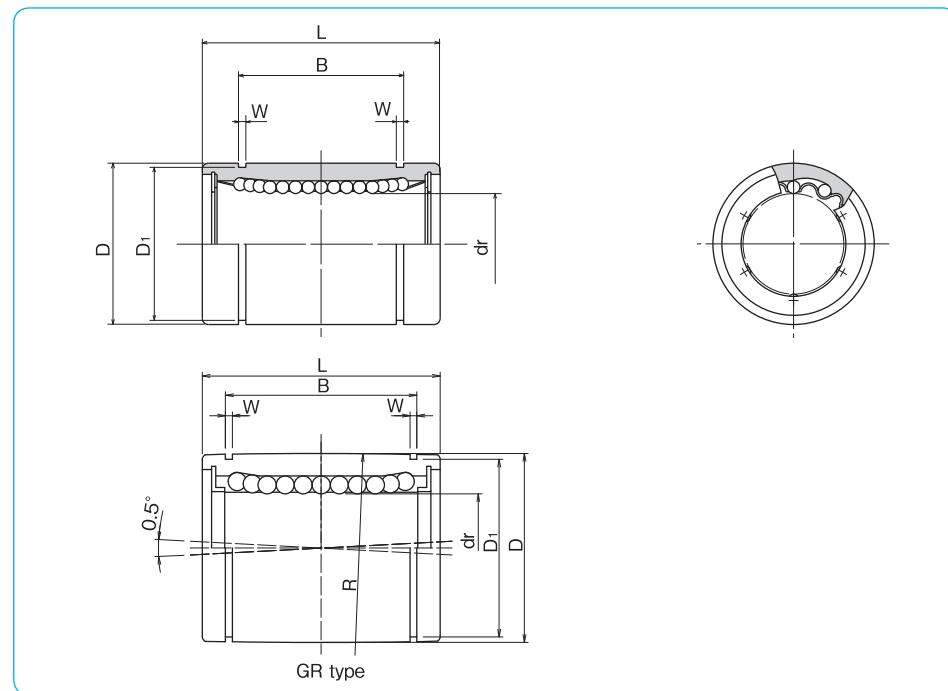

L inch (mm)	B inch (mm)	W inch (mm)	D1 inch (mm)	eccentricity	radial clearance (maximum)	basicloadrating dynamic	basicloadrating static	mass g	shaft diameter inch (mm)
tolerance inch/(mm)	tolerance inch/(mm)	tolerance inch/(mm)	inch (mm)	precision inch/(μm)	high inch/(μm)	C N	Co N		
.5000 (12.700)	.3681 (9.35)	.2902 (7.370)	-.0003 (-8)	-.0001 (-2)	.0003 (8)	59	76	2.8 (3.175)	
.5625 (14.275)	.4311 (10.95)	.3520 (8.940)				91	110	3.6 (4.763)	
.7500 (19.050)	.5110 (12.98)	.4687 (11.906)				206	265	9.5 (6.350)	
.8750 (22.225)	.6358 (16.15)	.5880 (14.935)				225	314	3/8 (9.525)	
1.2500 (31.750)	.9625 (24.46)	.8209 (20.853)				510	784	42 (12.700)	
1.5000 (38.100)	1.1039 (28.04)	.0559 (14.22)	1.0590 (26.899)			774	1,180	85 (15.875)	
1.6250 (41.275)	1.1657 (29.61)	.0559 (14.22)	1.1760 (29.870)	.0004 (10)	.0006 (15)	862	1,370	104 (19.050)	3/4 (1/2)
2.2500 (57.150)	1.7547 (44.57)	.0679 (17.27)	1.4687 (37.306)			980	1,570	220 (25.400)	1 (1)
2.6250 (66.675)	2.0047 (50.92)	.0679 (17.27)	1.8859 (47.904)			1,570	2,740	465 (31.750)	1-1/4 (1)
3.0000 (76.200)	3.0000 (61.26)	.0859 (2.184)	2.2389 (56.870)	.0005 (12)	.0008 (20)	2,180	4,020	720 (38.100)	1-1/2 (2)
4.0000 (101.600)	3.1917 (81.07)	.1029 (2.616)	2.8379 (72.085)			3,820	7,940	1,310 (50.800)	2 (2)
5.0000 (127.000)	3.9760 (100.99)	.1200 (3.048)	3.5519 (90.220)			4,700	10,000	2,600 (63.500)	2-1/2 (1)
6.0000 (152.400)	4.726 (120.04)	.1200 (3.048)	4.3100 (109.474)			7,350	16,000	4,380 (76.200)	3 (1)
8.0000 (203.200)	8.0000 (158.95)	.1389 (3.530)	5.745 (145.923)	.0008 (20)	.0012 (30)	14,100	34,800	10,200 (101.600)	4 (4)

1N ≈ 0.225lbf 1kg ≈ 2.205lbs

SW-AJ TYPE (Inch Standard)

— Clearance Adjustable Type —




part number structure

example	SWS	16	G	R	UU	AJ
specification						
SW: standard						
SWS: anti-corrosion						
size						
retainer material						
blank: standard/steel						
anti-corrosion/stainless steel						
G: resin						
clearance-adjustable						
seal						
blank: without seal						
U: seal on one side						
UU: seals on both sides						
self aligning						
blank: non self aligning						
R: self aligning *						

* Self-aligning is available only with resin retainer for size 8 to 32 of carbon steel cylinder.


steelretainer	partnumber		anti-corrosion stainless retainer	number ofball circuits	dr inch (mm)	tolerance* inch/μm	majordimensions		eccentricity* inch/μm	basicloadrating dynamic C N	basicloadrating static Co N	mass g	shaft diameter inch (mm)
	standard resinretainer	resinretainer					D inch (mm)	D ₁ inch (mm)	h inch (mm)				
-	SW4G-AJ	-	-	SWS4G-AJ	4	.2500 (6.350)	.5000 (12.700)	.4687 (11.906)	.04 (1)	206	265	7.5	1/4 (6.350)
-	SW6G-AJ	-	-	SWS6G-AJ	4	.3750 (9.525)	.6250 (15.875)	.5880 (14.935)	.04 (1)	225	314	13.5	3/8 (9.525)
SW8-AJ	SW8G-AJ	SW8GR-AJ	SWS8-AJ	SWS8G-AJ	4	.5000 (12.700)	.8750 (22.225)	.8209 (20.853)	.06 (1.5)	510	784	41	1/2 (12.700)
SW10-AJ	SW10G-AJ	SW10GR-AJ	SWS10-AJ	SWS10G-AJ	4	.625 (15.875)	1.1250 (28.575)	1.0590 (26.899)	.06 (1.5)	774	1,180	83	5/8 (15.875)
SW12-AJ	SW12G-AJ	SW12GR-AJ	SWS12-AJ	SWS12G-AJ	5	.7500 (19.050)	1.2500 (31.750)	1.1760 (29.870)	.06 (1.5)	862	1,370	102	3/4 (19.050)
SW16-AJ	SW16G-AJ	SW16GR-AJ	SWS16-AJ	SWS16G-AJ	6	1.0000 (25.400)	1.5625 (39.688)	1.4687 (37.306)	.06 (1.5)	980	1,570	218	1 (25.400)
SW20-AJ	SW20G-AJ	SW20GR-AJ	SWS20-AJ	SWS20G-AJ	6	1.2500 (31.750)	2.0000 (50.800)	1.8859 (47.904)	.10 (2.5)	1,570	2,740	455	1-1/4 (31.750)
SW24-AJ	SW24G-AJ	SW24GR-AJ	SWS24-AJ	SWS24G-AJ	6	1.5000 (38.100)	2.3750 (60.325)	2.2389 (56.870)	.12 (3)	2,180	4,020	710	1-1/2 (38.100)
SW32-AJ	SW32G-AJ	SW32GR-AJ	SWS32-AJ	SWS32G-AJ	6	2.0000 (50.800)	3.0000 (76.200)	2.8379 (72.085)	.12 (3)	3,820	7,940	1,290	2 (50.800)
SW40-AJ	-	-	-	-	6	2.5000 (63.500)	3.7500 (95.250)	3.5519 (90.220)	.12 (3)	4,700	10,000	2,560	2-1/2 (63.500)
SW48-AJ	-	-	-	-	6	3.0000 (76.200)	4.50000 (114.300)	4.3100 (109.474)	.12 (3)	7,350	16,000	4,350	3 (76.200)
SW64-AJ	-	-	-	-	6	4.0000 (101.600)	.0080 (-20)	5.745 (145.923)	.12 (3)	14,100	34,800	10,150	4 (101.600)

* Accuracy is measured prior to machining clearance slit.

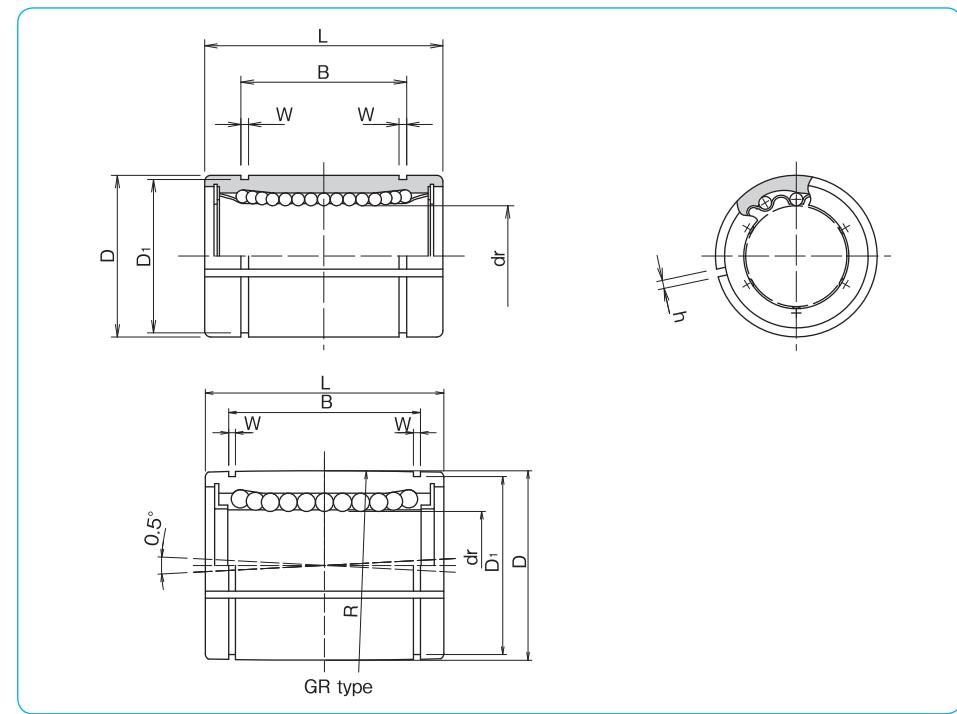

SW-OP TYPE (Inch Standard)


— Open Type —

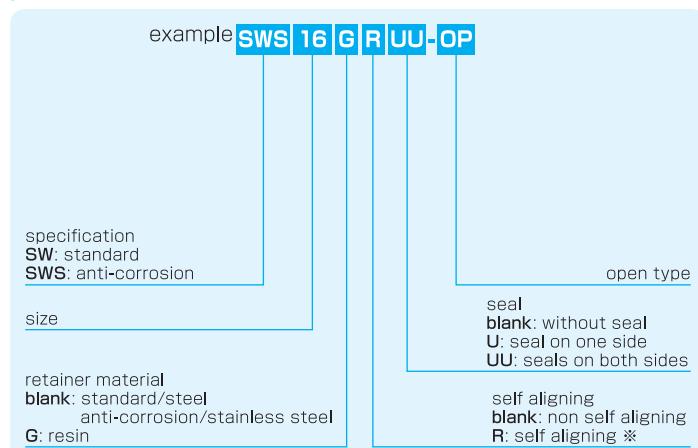**part number structure**

**Self-aligning is available only with resin retainer for size 8 to 32 of carbon steel cylinder.

steel retainer	part number		anti-corrosion		number of ball circuits	dr inch (mm)	tolerance* inch/μm	major dimensions	
	standard resin retainer	anti-corrosion steel retainer	resin retainer	D inch (mm)				tolerance* inch/μm	
SW 8-OP	SW 8G-OP	SW 8GR-OP	SWS 8-OP	SWS 8G-OP	3	.5000 (12.700)	0 -.00040 (-9)	.8750 (22.225) 1.1250 (28.575)	0 -.00050 (-13)
SW10-OP	SW10G-OP	SW10GR-OP	SWS10-OP	SWS10G-OP	3	.625 (15.875)			
SW12-OP	SW12G-OP	SW12GR-OP	SWS12-OP	SWS12G-OP	4	.7500 (19.050)	0 -.00040 (-10)	1.2500 (31.750) 1.5625 (39.688)	0 -.00065 (-16)
SW16-OP	SW16G-OP	SW16GR-OP	SWS16-OP	SWS16G-OP	5	1.0000 (25.400)			
SW20-OP	SW20G-OP	SW20GR-OP	SWS20-OP	SWS20G-OP	5	1.2500 (31.750)	0 -.00050 (-12)	2.0000 (50.800) 2.3750 (60.325)	0 -.00075 (-19)
SW24-OP	SW24G-OP	SW24GR-OP	SWS24-OP	SWS24G-OP	5	1.5000 (38.100)			
SW32-OP	SW32G-OP	SW32GR-OP	SWS32-OP	SWS32G-OP	5	2.0000 (50.800)			
SW40-OP	-	-	-	-	5	2.5000 (63.500)	0 -.00060 (-15)	3.7500 (95.250) 4.50000 (114.300)	0 -.00090 (-22)
SW48-OP	-	-	-	-	5	3.0000 (76.200)			
SW64-OP	-	-	-	-	5	4.0000 (101.600)	0 -.00080 (-20)	6.0000 (152.400)	0 -.00100 (-25)

* Accuracy is measured prior to machining clearance slit.

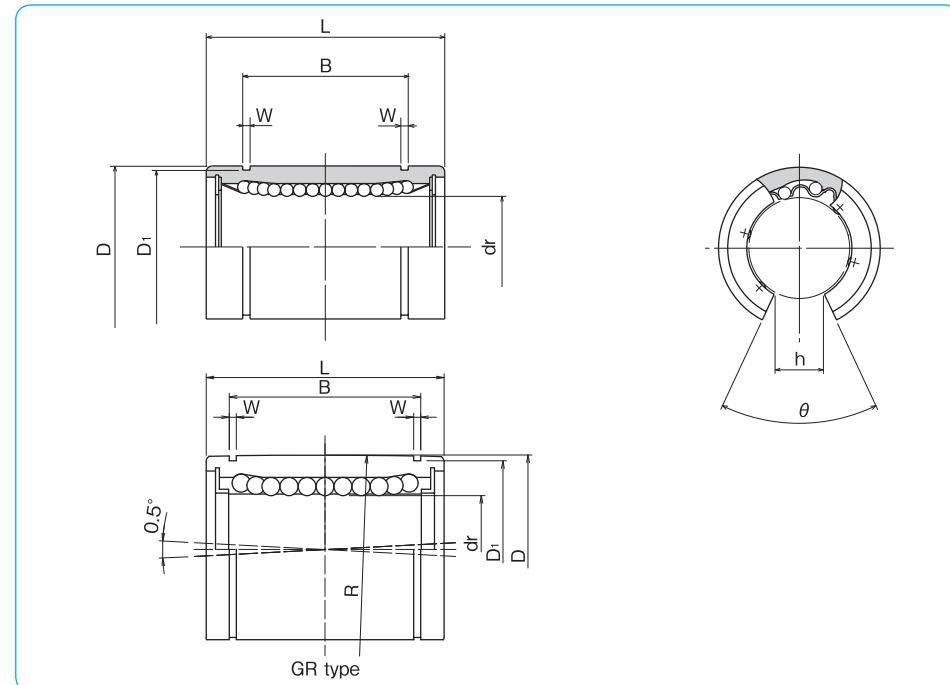

L inch (mm)	B tolerance inch/mm	W tolerance inch/mm	D ₁ inch (mm)	h inch (mm)	θ	eccentricity* inch (μm)	basic load rating dynamic C N	static Co N	mass g	shaft diameter inch (mm)
1.2500 (31.750)	.9625 (24.46)	0 0	.0459 (1.168)	.8209 (20.853)	.3125 (7.9375)	80°	.0005 (12)	510	784	32 (12,700)
1.5000 (38.100)	1.1039 (28.04)	-.008 (-0.2)	.0559 (1.422)	1.0590 (26.899)	.375 (9.5250)	80°		774	1,180	64 (15.875)
1.6250 (41.275)	1.1657 (29.61)		.0559 (1.422)	1.1760 (29.870)	.4375 (11.1125)	60°	.0006 (15)	862	1,370	86 (19.050)
2.2500 (57.150)	1.7547 (44.57)		.0679 (1.727)	1.4687 (37.306)	.5625 (14.2875)	50°		980	1,570	190 (25.400)
2.6250 (66.675)	2.0047 (50.92)	0 0	.0679 (1.727)	1.8859 (47.904)	.625 (15.875)	50°	.0008 (20)	1,570	2,740	390 (31.750)
3.0000 (76.200)	2.4118 (61.26)	-.012 (-0.3)	.0859 (2.184)	2.2389 (56.870)	.75 (19.05)	50°		2,180	4,020	610 (38.100)
4.0000 (101.600)	3.1917 (81.07)		.1029 (2.616)	2.8379 (72.085)	1.0 (25.40)	50°		3,820	7,940	1,120 (50.800)
5.0000 (127.000)	3.9760 (100.99)		.1200 (3.048)	3.5519 (90.220)	1.25 (31.75)	50°	.0010 (25)	4,700	10,000	2,230 (63.500)
6.0000 (152.400)	4.726 (120.04)	0 0	.1200 (3.048)	4.3100 (109.474)	1.5 (38.10)	50°		7,350	16,000	3,750 (76.200)
8.0000 (203.200)	6.258 (158.95)	-.016 (-0.4)	.1389 (3.530)	5.7475 (145.923)	2.0 (50.80)	50°	.0012 (30)	14,100	34,800	8,740 (101.60)

1N ≈ 0.225lbf 1kg ≈ 2.205lbs


SW-W TYPE (Inch Standard)

— Double-Wide Type —



part number structure

example	SWS	16	G	W	UU
specification					
SW: standard					
SWS: anti-corrosion					
size					
retainer material					
blank: standard/steel					
anti-corrosion/stainless steel					
G: resin					
double-wide type					
seal					
blank: without seal					
UU: seals on both sides					

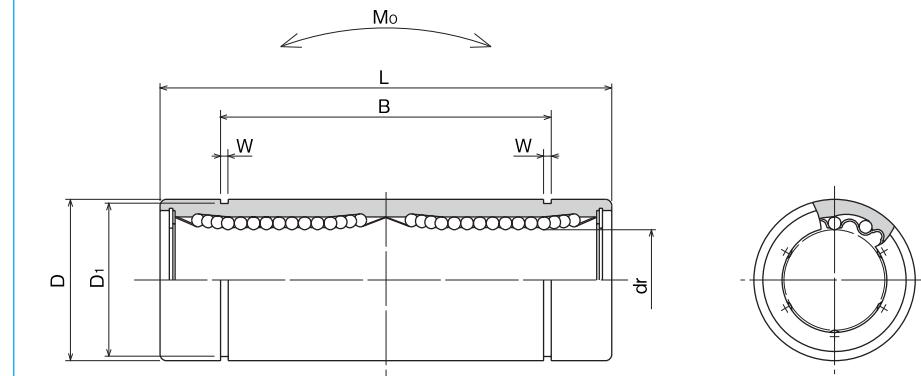

part number		standard		anti-corrosion		number of ball circuits	dr inch (mm)	tolerance inch/μm	major dimensions		eccentricity δ inch/μm	basic load rating dynamic C N	basic load rating static Co N	allowable static moment Mo N·m	mass g	shaft diameter inch (mm)
steel retainer	resin retainer	stainless retainer	resin retainer	W	D				W	D						
SW 4W	SW 4GW	SWS 4W	SWS 4GW	4	.2500 (6.350)		.5000 (12.700)	-.00050 (-13)							1/4 (6.350)	
SW 6W	SW 6GW	SWS 6W	SWS 6GW	4	.3750 (9.525)		.6250 (15.875)	0 -.00040 (-10)							3/8 (9.525)	
SW 8W	SW 8GW	SWS 8W	SWS 8GW	4	.5000 (12.700)		.8750 (22.225)	0 -.00065 (-16)							1/2 (12.700)	
SW10W	SW10GW	SWS10W	SWS10GW	4	.6250 (15.875)		1.1250 (28.575)								5/8 (15.875)	
SW12W	SW12GW	SWS12W	SWS12GW	5	.7500 (19.050)		1.2500 (31.750)	0 -.00050 (-12)							3/4 (19.050)	
SW16W	SW16GW	SWS16W	SWS16GW	6	1.0000 (25.400)		1.5625 (39.688)	0 -.00050 (-19)							1 (25.400)	
SW20W	SW20GW	SWS20W	SWS20GW	6	1.2500 (31.750)		2.0000 (50.800)	0 -.00060 (-15)							1-1/4 (31.750)	
SW24W	SW24GW	SWS24W	SWS24GW	6	1.5000 (38.100)		2.3750 (60.325)	0 -.00060 (-15)							1-1/2 (38.100)	
SW32W	SW32GW	SWS32W	SWS32GW	6	2.0000 (50.800)		3.0000 (76.200)	0 -.00100 (-25)							2 (50.800)	

L inch (mm)	B tolerance inch/mm	W inch (mm)	D1 inch (mm)	eccentricity δ inch/μm	basic load rating dynamic C N	basic load rating static Co N	allowable static moment Mo N·m	mass g	shaft diameter inch (mm)
1.3750 (34.925)	.0390 (0.992)	.4687 (11.906)			323	530	2.0	17.5	1/4 (6.350)
1.5938 (40.481)	.0390 (0.992)	.5880 (14.935)		.0006 (15)	353	630	2.7	28	3/8 (9.525)
2.3750 (60.325)	.0459 (1.168)	.8209 (20.853)			813	1,570	11.5	80	1/2 (12.700)
2.8125 (71.438)	.0559 (1.422)	1.0590 (26.899)			1,230	2,350	20.0	160	5/8 (15.875)
3.0937 (78.581)	.0559 (1.422)	1.1760 (29.870)		.0008 (20)	1,370	2,740	26.5	195	3/4 (19.050)
4.2813 (108.744)	.0679 (1.727)	1.4687 (37.306)			1,570	3,140	41.2	410	1 (25.400)
5.0000 (127.000)	.0679 (1.727)	1.8859 (47.904)		.0010 (25)	2,500	5,490	84.8	820	1-1/4 (31.750)
5.6875 (144.463)	.0859 (2.184)	2.2389 (56.870)			3,430	8,040	143	1,250	1-1/2 (38.100)
7.7500 (196.850)	.1029 (2.616)	2.8379 (72.085)	.0012 (30)	6,080	15,900	399	2,350		2 (50.800)

1N = 0.225lbf 1N · m = 0.738lb · ft
1kg = 2.205lbs

SWF TYPE (Inch Standard)


— Round Flange Type —



part number structure

example **SWSF 16 G UU-SK**specification
SWF: standard
SWSF: anti-corrosion

size

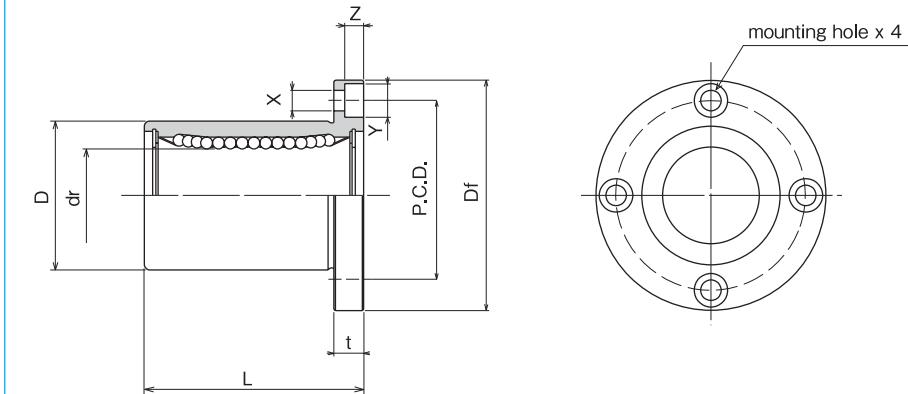retainer material
blank: standard/steel
anti-corrosion/stainless steel
G: resinouter cylinder surface treatment
blank: no surface treatment
SK: electroless nickel plating
LF: low temperature black chrome treatment with fluoride coating
SB: black oxide (not available on anti-corrosion type)
SC: industrial chrome platingseal
blank: without seal
UU: seals on both sides

		part number		number of ball circuits	dr tolerance inch/(μm)	major dimensions		
standard steel retainer	resin retainer	anti-corrosion stainless retainer	resin retainer			D tolerance inch/(μm)	L tolerance inch/(μm)	(±.012) (±0.3) inch/mm
SWF 4	SWF 4G	SWSF 4	SWSF 4G	4	.2500 (6.350)	.5000 (12.700)	-.00050 (-13)	0 (19.050)
SWF 6	SWF 6G	SWSF 6	SWSF 6G	4	.3750 (9.525)	.6250 (15.875)	0 (-0.0040)	.8750 (22.225)
SWF 8	SWF 8G	SWSF 8	SWSF 8G	4	.5000 (12.700)	.8750 (22.225)	-.00065 (-9)	1.2500 (31.750)
SWF10	SWF10G	SWSF10	SWSF10G	4	.6250 (15.875)	1.1250 (28.575)	0 (-0.0040)	1.5000 (38.100)
SWF12	SWF12G	SWSF12	SWSF12G	5	.7500 (19.050)	1.2500 (31.750)	0 (-0.0040)	1.6250 (41.275)
SWF16	SWF16G	SWSF16	SWSF16G	6	1.0000 (25.400)	1.5625 (39.688)	-.00075 (-10)	2.2500 (57.150)
SWF20	SWF20G	SWSF20	SWSF20G	6	1.2500 (31.750)	2.0000 (50.800)	0 (-0.0050)	2.6250 (66.675)
SWF24	SWF24G	SWSF24	SWSF24G	6	1.5000 (38.100)	2.3750 (60.325)	-.00090 (-12)	3.0000 (76.200)
SWF32	SWF32G	SWSF32	SWSF32G	6	2.0000 (50.800)	3.0000 (76.200)	0 (-0.0060)	4.0000 (101.600)
SWF40	—	—	—	6	2.5000 (63.500)	3.7500 (95.250)	0 (-0.0060)	5.0000 (127.000)
SWF48	—	—	—	6	3.0000 (76.200)	4.5000 (114.300)	0 (-0.0080)	6.0000 (152.400)
SWF64	—	—	—	6	4.0000 (101.600)	6.0000 (152.400)	0 (-0.0080)	8.0000 (203.200)

Df inch/(mm)	t inch/(mm)	P.C.D. inch/(mm)	X × Y × Z inch/(mm)	eccentricity inch (μm)	perpendicularity inch (μm)	basic load rating		mass g	shaft diameter inch (mm)
						C N	N Co		
1.2500 (31.750)	.2187 (5.556)	.8750 (22.225)	.1560 × .2500 × .1410 (3.969 × 6.350 × 3.572)	.0005 (12)	.0005 (12)	206	265	32	1/4 (6.350)
1.5000 (38.100)	.2500 (6.350)	1.0620 (26.988)	.1875 × .2970 × .1720 (4.763 × 7.541 × 4.366)			225	314	47	3/8 (9.525)
1.7500 (44.450)	.2500 (6.350)	1.3121 (33.338)	.1875 × .2970 × .1720 (4.763 × 7.541 × 4.366)			510	784	88	1/2 (12.700)
2.0000 (50.800)	.2500 (6.350)	1.5620 (39.688)	.1875 × .2970 × .1720 (4.763 × 7.541 × 4.366)			774	1,180	140	5/8 (15.875)
2.1875 (55.563)	.3125 (7.938)	1.7180 (43.660)	.2187 × .3440 × .2030 (5.556 × 8.731 × 5.159)	.0006 (15)	.0006 (15)	862	1,370	190	3/4 (19.050)
2.5000 (63.500)	.3125 (7.938)	2.0310 (51.594)	.2187 × .3440 × .2030 (5.556 × 8.731 × 5.159)			980	1,570	325	1 (25.400)
3.1250 (79.375)	.3750 (9.525)	2.5625 (65.088)	.2812 × .4060 × .2656 (7.144 × 10.319 × 6.747)	.0008 (20)	.0008 (20)	1,570	2,740	665	1-1/4 (31.750)
3.7500 (95.250)	.5000 (12.700)	3.0625 (77.788)	.3440 × .5000 × .3280 (8.731 × 12.700 × 8.334)			2,180	4,020	1,100	1-1/2 (38.100)
4.3750 (111.125)	.5000 (12.700)	3.6875 (93.662)	.3440 × .5000 × .3280 (8.731 × 12.700 × 8.334)	.0010 (25)	.0010 (25)	3,820	7,940	1,760	2 (50.800)
5.3750 (136.525)	.7500 (19.050)	4.5625 (115.887)	.4062 × .6250 × .3750 (10.319 × 15.875 × 9.525)			4,700	10,000	3,570	2-1/2 (63.500)
6.1250 (155.575)	.7500 (19.050)	5.3125 (134.937)	.4062 × .6250 × .3750 (10.319 × 15.875 × 9.525)			7,350	16,000	5,600	3 (76.200)
8.0000 (203.200)	.8750 (22.225)	7.0000 (177.800)	.5000 × .7125 × .5000 (12.700 × 18.097 × 12.700)	.0012 (30)	.0012 (30)	14,100	34,800	12,000	4 (101.600)


1N = 0.225lbf 1kg = 2.205lbs

SWK TYPE (Inch Standard)

— Square Flange Type —

**part number structure**example **SWSK 16 G UU-SK**specification
SWK: standard
SWSK: anti-corrosion

size

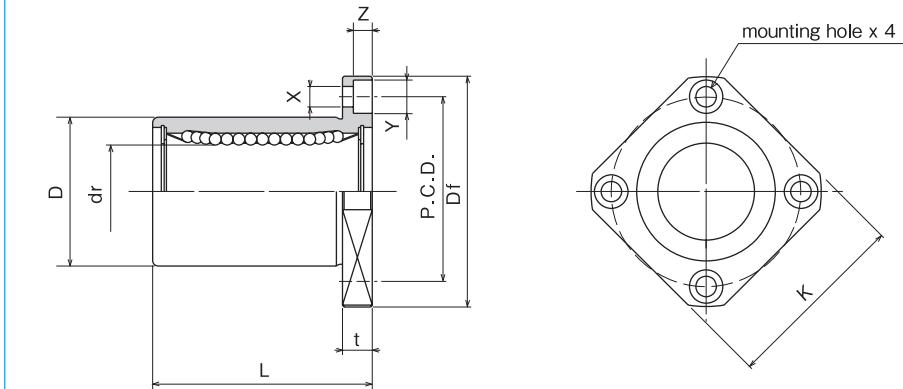retainer material
blank: standard/steel
anti-corrosion/stainless steel
G: resinouter cylinder surface treatment
blank: no surface treatment
SK: electroless nickel plating
LF: low temperature black chrome treatment with fluoride coating
SB: black oxide (not available on anti-corrosion type)
SC: industrial chrome platingseal
blank: without seal
UU: seals on both sides

		part number		number of ball circuits	dr tolerance inch/(μm)	major dimensions		
standard steel retainer	resin retainer	anti-corrosion stainless retainer	resin retainer			D tolerance inch/(μm)	L tolerance inch/(μm)	(±.012) (±0.3) inch/mm
SWK 4	SWK 4G	SWSK 4	SWSK 4G	4	.2500 (6.350)	.5000 (12.700)	-.00050 (-13)	.7500 (19.050)
SWK 6	SWK 6G	SWSK 6	SWSK 6G	4	.3750 (9.525)	.6250 (15.875)	0	.8750 (22.225)
SWK 8	SWK 8G	SWSK 8	SWSK 8G	4	.5000 (12.700)	.8750 (22.225)	-.00065 (-9)	1.2500 (31.750)
SWK10	SWK10G	SWSK10	SWSK10G	4	.6250 (15.875)	1.1250 (28.575)	0	1.5000 (38.100)
SWK12	SWK12G	SWSK12	SWSK12G	5	.7500 (19.050)	1.2500 (31.750)	0	1.6250 (41.275)
SWK16	SWK16G	SWSK16	SWSK16G	6	1.0000 (25.400)	1.5625 (39.688)	-.00040 (-10)	2.2500 (57.150)
SWK20	SWK20G	SWSK20	SWSK20G	6	1.2500 (31.750)	2.0000 (50.800)	0	2.6250 (66.675)
SWK24	SWK24G	SWSK24	SWSK24G	6	1.5000 (38.100)	2.3750 (60.325)	-.00050 (-12)	3.0000 (76.200)
SWK32	SWK32G	SWSK32	SWSK32G	6	2.0000 (50.800)	3.0000 (76.200)	0	4.0000 (101.600)
SWK40	—	—	—	6	2.5000 (63.500)	3.7500 (95.250)	0	5.0000 (127.000)
SWK48	—	—	—	6	3.0000 (76.200)	4.5000 (114.300)	-.00060 (-15)	6.0000 (152.400)
SWK64	—	—	—	6	4.0000 (101.600)	6.0000 (152.400)	0	8.0000 (203.200)

Df inch/(mm)	K inch/(mm)	t inch/(mm)	flange		X×Y×Z inch/(mm)	eccentricity inch (μm)	perpendicularity inch (μm)	basic load rating dynamic C N	basic load rating static Co N	mass g	shaft diameter inch (mm)
			D inch (mm)	P.C.D. inch (mm)							
1.2500 (31.750)	1.0000 (25.400)	.2187 (5.556)	.8750 (22.225)	.1560×.2500×.1410 (3,369×6,350×3,572)	.0005 (12)	.0005 (12)	.0005 (12)	206	265	25	1/4 (6.350)
1.5000 (38.100)	1.2500 (31.750)	.2500 (6.350)	1.0620 (26.988)	.1875×.2970×.1720 (4,763×7,541×4,366)				225	314	32	3/8 (9.525)
1.7500 (44.450)	1.3750 (34.925)	.2500 (6.350)	1.312 (33.338)	.1875×.2970×.1720 (4,763×7,541×4,366)				510	784	68	1/2 (12.700)
2.0000 (50.800)	1.5000 (38.100)	.2500 (6.350)	1.5620 (39.688)	.1875×.2970×.1720 (4,763×7,541×4,366)				774	1,180	124	5/8 (15.875)
2.1875 (55.563)	1.6875 (42.863)	.3125 (7.938)	1.7180 (43.660)	.2187×.3440×.2030 (5,556×8,731×5,159)	.0006 (15)	.0006 (15)	.0006 (15)	862	1,370	150	3/4 (19.050)
2.5000 (63.500)	2.0000 (50.800)	.3125 (7.938)	2.0310 (51.594)	.2187×.3440×.2030 (5,556×8,731×5,159)				980	1,570	280	1 (25.400)
3.1250 (79.375)	2.5000 (63.500)	.3750 (9.525)	2.5625 (65.088)	.2812×.4060×.2656 (7,144×10,319×6,747)				1,570	2,740	580	1-1/4 (31.750)
3.7500 (95.250)	3.0000 (76.200)	.5000 (12.700)	3.0625 (77.788)	.3440×.5000×.3280 (8,731×12,700×8,334)				2,180	4,020	930	1-1/2 (38.100)
4.3750 (111.125)	3.5000 (88.900)	.5000 (12.700)	3.6875 (93.662)	.3440×.5000×.3280 (8,731×12,700×8,334)	.0008 (20)	.0008 (20)	.0008 (20)	3,820	7,940	1,580	2 (50.800)
5.3750 (136.525)	4.3750 (111.125)	.7500 (19.050)	4.5625 (115.887)	.4062×.6250×.3750 (10,319×15,875×9,525)				4,700	10,000	3,200	2-1/2 (63.500)
6.1250 (155.575)	5.0000 (127.000)	.7500 (19.050)	5.3125 (134.937)	.4062×.6250×.3750 (10,319×15,875×9,525)	.0010 (25)	.0010 (25)	.0010 (25)	7,350	16,000	5,000	3 (76.200)
8.0000 (203.200)	6.7500 (171.450)	.8750 (22.225)	7.0000 (177.800)	.5000×.7125×.5000 (12,700×18,097×12,700)				.0012 (30)	14,100	34,800	11,300 (101.600)

1N = 0.225lbf 1kg = 2.205lbs

SWF-W TYPE (Inch Standard)

— Round Flange Double-Wide Type —




part number structure

example	SWSF 16 G W UU - SK
specification	
SWF: standard	
SWSF: anti-corrosion	
size	
retainer material	
blank: standard/steel	
anti-corrosion/stainless steel	
G: resin	
double-wide type	

outer cylinder surface treatment
blank: no surface treatment
SK: electroless nickel plating
LF: low temperature black chrome treatment with fluoride coating
SB: black oxide (not available on anti-corrosion type)
SC: industrial chrome plating

seal
blank: without seal
UU: seals on both sides

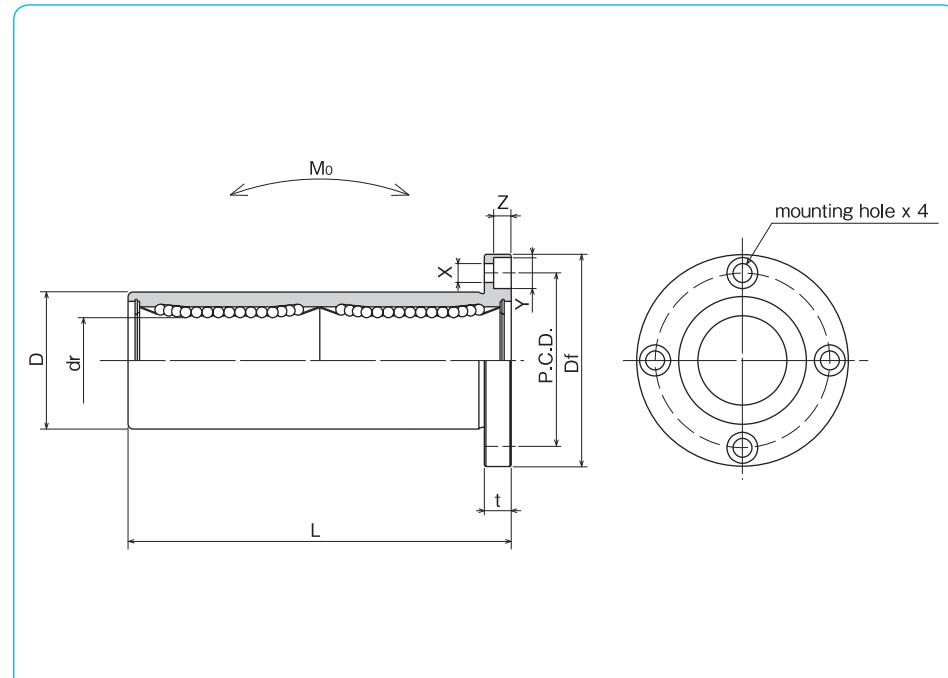

steel retainer	part number		number of ball circuits	dr tolerance inch/(μm)	major dimensions		
	standard	anti-corrosion			D tolerance inch/(μm)	L tolerance (±.012) (±.03) inch/(mm)	
steel retainer	SWF 4W	SWF 4GW	SWSF 4W	SWSF 4GW	.2500 (6,350)	.5000 (12,700)	.00050 (-13)
resin retainer	SWF 6W	SWF 6GW	SWSF 6W	SWSF 6GW	.3750 (9,525)	.6250 (15,875)	0 -.00040 (-10)
stainless retainer	SWF 8W	SWF 8GW	SWSF 8W	SWSF 8GW	.5000 (12,700)	.8750 (22,225)	0 -.00065 (-16)
resin retainer	SWF10W	SWF10GW	SWSF10W	SWSF10GW	.6250 (15,875)	1.1250 (28,575)	2.8125 (71,438)
stainless retainer	SWF12W	SWF12GW	SWSF12W	SWSF12GW	.7500 (19,050)	1.2500 (31,750)	0 -.00050 (-12)
resin retainer	SWF16W	SWF16GW	SWSF16W	SWSF16GW	1.0000 (25,400)	1.5625 (39,688)	0 -.00075 (-19)
stainless retainer	SWF20W	SWF20GW	SWSF20W	SWSF20GW	1.2500 (31,750)	2.0000 (50,800)	0 -.00090 (-15)
resin retainer	SWF24W	SWF24GW	SWSF24W	SWSF24GW	1.5000 (38,100)	2.3750 (60,325)	0 -.00060 (-22)
stainless retainer	SWF32W	SWF32GW	SWSF32W	SWSF32GW	2.0000 (50,800)	3.0000 (76,200)	0 -.00100 (-25)

Df inch/(mm)	t inch/(mm)	P.C.D. inch/(mm)	X × Y × Z inch/(mm)	eccentricity inch (μm)	perpendicularity inch (μm)	basic load rating		allowable static moment Mo N · m	mass g	shaft diameter inch (mm)
						C N	Co N			
1.2500 (31,750)	.2187 (5,556)	.8750 (22,225)	.1563 × .2500 × 1,406 (3,969 × 6,350 × 3,572)	.0006 (15)	.0006 (15)	323	530	2.0	40	1/4 (6,350)
1.5000 (38,100)	.2500 (6,350)	1.0625 (26,988)	.1875 × .2969 × 1,719 (4,763 × 7,541 × 4,366)			353	630	2.7	60	3/8 (9,525)
1.7500 (44,450)	.2500 (6,350)	1.3125 (33,338)	.1875 × .2969 × 1,719 (4,763 × 7,541 × 4,366)			813	1,570	11.5	126	1/2 (12,700)
2.0000 (50,800)	.2500 (6,350)	1.5625 (39,688)	.1875 × .2969 × 1,719 (4,763 × 7,541 × 4,366)			1,230	2,350	20.0	215	5/8 (15,875)
2.1875 (55,563)	.3125 (7,938)	1.7188 (43,656)	.2188 × .3438 × 2,031 (5,556 × 8,731 × 5,159)	.0008 (20)	.0008 (20)	1,370	2,740	26.5	280	3/4 (19,050)
2.5000 (63,500)	.3125 (7,938)	2.0313 (51,594)	.2188 × .3438 × 2,031 (5,556 × 8,731 × 5,159)			1,570	3,140	41.2	515	1 (25,400)
3.1250 (79,375)	.3750 (9,525)	2.5625 (65,088)	.2813 × .4063 × .2656 (7,144 × 10,319 × 6,747)	.0010 (25)	.0010 (25)	2,500	5,490	84.8	1,020	1-1/4 (31,750)
3.7500 (95,250)	.5000 (12,700)	3.0625 (77,788)	.3437 × .5000 × .3281 (8,731 × 12,700 × 8,334)			3,430	8,040	143	1,630	1-1/2 (38,100)
4.3750 (111,125)	.5000 (12,700)	3.6875 (93,662)	.3437 × .5000 × .3281 (8,731 × 12,700 × 8,334)			.0012 (30)	.0012 (30)	6,080	15,900	2 (50,800)

1N ≈ 0.225lbf 1N · m ≈ 0.738lb · ft
1kg ≈ 2.205lbs

SWK-W TYPE (Inch Standard)

— Square Flange Double-Wide Type —




part number structure

example	SWSK	16	G	W	UU	-SK
specification	SWSK: standard					
	SWSK: anti-corrosion					
size						
retainer material	blank: standard/steel					
	anti-corrosion/stainless steel					
G: resin						
double-wide type						

outer cylinder surface treatment
blank: no surface treatment
SK: electroless nickel plating
LF: low temperature black chrome treatment with fluoride coating
SB: black oxide (not available on anti-corrosion type)
SC: industrial chrome plating

seal
blank: without seal
UU: seals on both sides

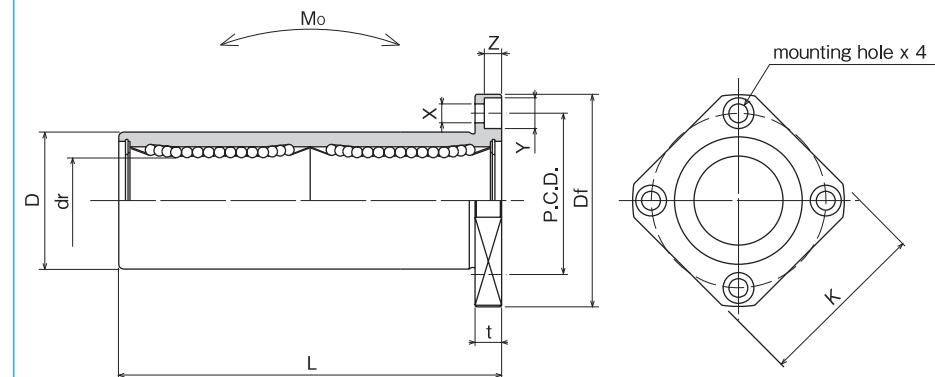

part number		standard		anti-corrosion		number of ball circuits	dr inch (mm)	tolerance inch/μm	major dimensions		
steel retainer	resin retainer	stainless retainer	resin retainer						D inch (mm)	tolerance inch/μm	L (±0.3) inch/mm
SWK 4W	SWK 4GW	SWSK 4W	SWSK 4GW	4	.2500 (6.350)		.5000 (12.700)	-.00050 (-13)	.13750 (34.925)		
SWK 6W	SWK 6GW	SWSK 6W	SWSK 6GW	4	.3750 (9.525)		.6250 (15.875)	0	1.5938 (40.481)		
SWK 8W	SWK 8GW	SWSK 8W	SWSK 8GW	4	.5000 (12.700)		.8750 (22.225)	-.00065 (-10)	2.3750 (60.325)		
SWK10W	SWK10GW	SWSK10W	SWSK10GW	4	.6250 (15.875)		1.1250 (28.575)		2.8125 (71.438)		
SWK12W	SWK12GW	SWSK12W	SWSK12GW	5	.7500 (19.050)		1.2500 (31.750)	0	3.0937 (78.581)		
SWK16W	SWK16GW	SWSK16W	SWSK16GW	6	1.0000 (25.400)		1.5625 (39.688)	-.00075 (-12)	4.2813 (108.744)		
SWK20W	SWK20GW	SWSK20W	SWSK20GW	6	1.2500 (31.750)		2.0000 (50.800)	0	5.0000 (127.000)		
SWK24W	SWK24GW	SWSK24W	SWSK24GW	6	1.5000 (38.100)		2.3750 (60.325)	-.00090 (-15)	5.6875 (144.463)		
SWK32W	SWK32GW	SWSK32W	SWSK32GW	6	2.0000 (50.800)		3.0000 (76.200)	0	7.7500 (196.850)		

Df inch/mm	K inch/mm	t inch/mm	P.C.D. inch/mm	flange		eccentricity inch/μm	perpendicularity inch/μm	basic load rating dynamic C N	load rating static Co N	allowable static moment Mo N·m	mass g	shaft diameter inch/mm
				X	Y×Z inch/mm							
1.2500 (31.750)	1.0000 (25.400)	.2188 (5.556)	.8750 (22.225)	.1563×.2500×1.406 (3.989×6.350×3.572)				323	530	2.0	33	1/4 (6.350)
1.5000 (38.100)	1.2500 (31.750)	.2500 (6.350)	1.0625 (26.988)	.1875×.2969×.1719 (4.763×7.541×4.366)		.0006 (15)	.0006 (15)	353	630	2.7	45	3/8 (9.525)
1.7500 (44.450)	1.3750 (34.925)	.2500 (6.350)	1.3125 (33.338)	.1875×.2969×.1719 (4.763×7.541×4.366)				813	1,570	11.5	106	1/2 (12.700)
2.0000 (50.800)	1.5000 (38.100)	.2500 (6.350)	1.5625 (39.688)	.1875×.2969×.1719 (4.763×7.541×4.366)				1,230	2,350	20.0	200	5/8 (15.875)
2.1875 (55.563)	1.6875 (42.863)	.3125 (7.938)	1.7188 (43.656)	.2188×.3438×.2031 (5.556×8.731×5.159)		.0008 (20)	.0008 (20)	1,370	2,740	26.5	240	3/4 (19.050)
2.5000 (63.500)	2.0000 (50.800)	.3125 (7.938)	2.0313 (51.594)	.2188×.3438×.2031 (5.556×8.731×5.159)				1,570	3,140	41.2	470	1 (25.400)
3.1250 (79.375)	2.5000 (63.500)	.3750 (9.525)	2.5625 (65.088)	.2813×.4063×.2656 (7.144×10.319×6.747)		.0010 (25)	.0010 (25)	2,500	5,490	84.8	935	1-1/4 (31.750)
3.7500 (95.250)	3.0000 (76.200)	.5000 (12.700)	3.6875 (93.662)	.3437×.5000×.3281 (8.731×12.700×8.334)				3,430	8,040	143	1,460	1-1/2 (38.100)
4.3750 (111.125)	3.5000 (88.900)	.5000 (12.700)	3.6875 (93.662)	.3437×.5000×.3281 (8.731×12.700×8.334)		.0012 (30)	.0012 (30)	6,080	15,900	399	2,620	2 (50.800)

1N = 0.225lbf 1N · m = 0.738lb · ft
1kg = 2.205lbs


GM TYPE

— Single Type —

**part number structure**example **GM|25|UU**

GM type

inner contact diameter (dr)

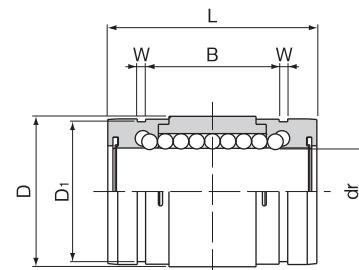seal
blank: without seal
UU: seals on both sides

part number	number of ball circuits	dr mm	tolerance μm	major dimensions					basic load rating dynamic C N	static Co N	mass g	
				D mm	tolerance μm	L mm	B mm	W mm				
GM 6	4	6		12	0	19	11.3	1.1	11.5	206	265	5
GM 8	4	8		15	-11	24	15.3	1.1	14.3	274	392	10
GM10	4	10	0	19		29	19.4	1.3	18	372	549	18
GM12	4	12	-9	21	0	30	20.4	1.3	20	510	784	23
GM13	4	13		23	-13	32	20.4	1.3	22	510	784	27
GM16	4	16		28		37	23.3	1.6	27	774	1,180	45
GM20	6	20		32	0	42	27.3	1.6	30.5	882	1,370	70
GM25	6	25	0	40	-16	59	37.3	1.85	38	980	1,570	150
GM30	6	30	-10	45		64	40.8	1.85	43	1,570	2,740	180

GM-AJ type (clearance adjustable type) is also manufactured. Please contact NB for details.


 $1\text{N} \approx 0.102\text{kgf}$ **GM-W TYPE**

— Double-Wide Type —

**part number structure**example **GM|25|W|UU**

GM type

inner contact diameter (dr)

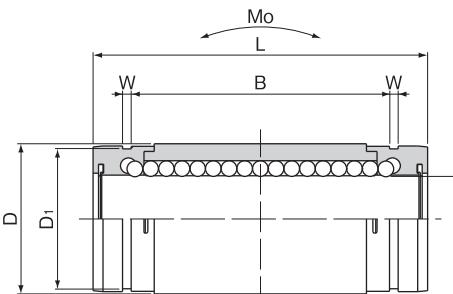seals on both sides
double-wide type

part number	number of ball circuits	dr mm	tolerance μm	major dimensions					basic load rating dynamic C N	static Co N	allowable static moment Mo N·m	mass g	
				D mm	tolerance μm	L mm	B mm	W mm					
GM 6W UU	4	6		12	0	28	20.3	1.1	11.5	323	530	1.5	9
GM 8W UU	4	8		15	-13	36	27.3	1.1	14.3	431	784	3.3	18
GM10W UU	4	10	0	19		41	31.4	1.3	18	588	1,100	5.0	31
GM12W UU	4	12	-10	21	0	46	36.4	1.3	20	813	1,570	7.6	42
GM13W UU	4	13		23	-16	48	36.4	1.3	22	813	1,570	8.1	50
GM16W UU	4	16		28		53	39.3	1.6	27	1,230	2,350	13.8	76
GM20W UU	6	20		32	0	65	50.3	1.6	30.5	1,400	2,740	20.0	130
GM25W UU	6	25	-12	40	-19	91	69.3	1.85	38	1,560	3,140	34.8	280
GM30W UU	6	30		45		99	75.8	1.85	43	2,490	5,490	57.5	334

*UU type is standard.

 $1\text{N} \approx 0.102\text{kgf}$ $1\text{N} \cdot \text{m} \approx 0.102\text{kgf} \cdot \text{m}$

SMA TYPE

— Block Type —



part number structure

example **SMSA 25 G UU**


specification
SMA: standard
SMSA: anti-corrosion

seal
blank: without seal
UU: seals on both sides

retainer material
blank: standard/steel
anti-corrosion/stainless steel
G: resin

inner contact diameter

part number	inner contact diameter		outer dimensions							major dimensions		
	mm	tolerance μm	h mm	E mm	W mm	L mm	F mm	G mm	T mm			
SMA 3GUU	3	0	5	8	16	13	10	8	—			
SMA 4GUU	4	— 8	5.5	8.5	17	15	11	9	—			
SMA 5GUU	5	— 8	7	11	22	18	14	11	—			
SMA 6GUU	6	— 9	9	15	30	25	18	15	6			
SMA 8GUU	8	— 9	11	17	34	30	22	18	6			
SMA10GUU	10	0	13	20	40	35	26	21	8			
SMA12GUU	12	— 9	15	21	42	36	28	24	8			
SMA13GUU	13	— 9	15	22	44	39	30	24.5	8			
SMA16GUU	16	— 9	19	25	50	44	38.5	32.5	9			
SMA20GUU	20	0	21	27	54	50	41	35	11			
SMA25GUU	25	— 10	26	38	76	67	51.5	42	12			
SMA30GUU	30	— 10	30	39	78	72	59.5	49	15			
SMA35GUU	35	0	34	45	90	80	68	54	18			
SMA40GUU	40	— 12	40	51	102	90	78	62	20			
SMA50GUU	50	— 12	52	61	122	110	102	80	25			
SMA60GUU	60	0/-15	58	66	132	122	114	94	30			

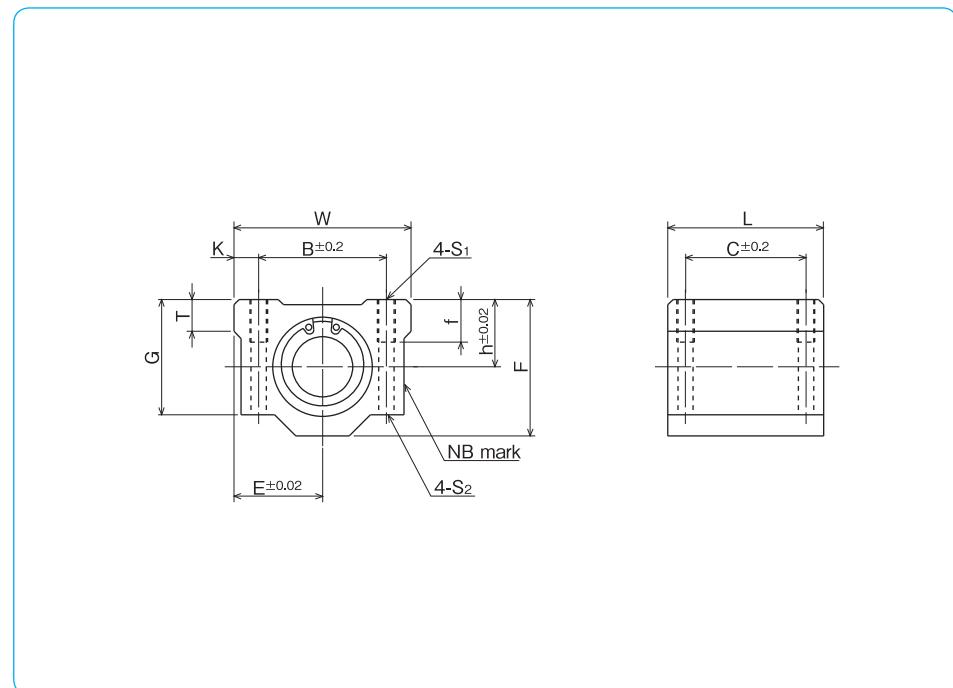

B mm	C mm	K mm	mounting dimensions			S ₁ mm	f mm	S ₂ mm	basic load rating dynamic C N	static Co N	mass g	shaft diameter mm
			M2	M3	M4							
11	8	2.5	M2	—	—	69	105	5	3			
12	10	2.5	M3	—	—	88	127	7	4			
16	12	3	M3	—	—	167	206	14	5			
20	15	5	M4	8	3.4	206	265	34	6			
24	18	5	M4	8	3.4	274	392	52	8			
28	21	6	M5	12	4.3	372	549	92	10			
30.5	26	5.75	M5	12	4.3	510	784	102	12			
33	26	5.5	M5	12	4.3	510	784	120	13			
36	34	7	M5	12	4.3	774	1,180	200	16			
40	40	7	M6	12	5.2	882	1,370	255	20			
54	50	11	M8	18	7	980	1,570	600	25			
58	58	10	M8	18	7	1,570	2,740	735	30			
70	60	10	M8	18	7	1,670	3,140	1,100	35			
80	60	11	M10	25	8.7	2,160	4,020	1,590	40			
100	80	11	M10	25	8.7	3,820	7,940	3,340	50			
108	90	12	M12	25	10.7	4,700	10,000	4,270	60			

1N ≈ 0.102kgf

SMA-W TYPE

— Double-Wide Block Type —



part number structure

example **SMSA 25 G W UU**

specification
SMA: standard
SMSA: anti-corrosion


inner contact diameter

seal
 blank: without seal
 UU: seals on both sides

double-wide type

retainer material
 blank: standard/steel
 anti-corrosion/stainless steel
 G: resin

part number	inner contact diameter mm	tolerance μm	major dimensions								
			h mm	E mm	W mm	L mm	F mm	G mm	T mm	N mm	
SMA 3GWUU	3	0	5	8	16	23	10	8	—	—	
SMA 4GWUU	4	— 8	5.5	8.5	17	27	11	9	—	—	
SMA 5GWUU	5	0	7	11	22	33	14	11	—	—	
SMA 6GWUU	6	— 9	9	15	30	48	18	15	6	7	
SMA 8GWUU	8	0	11	17	34	58	22	18	6	7	
SMA10GWUU	10	— 9	13	20	40	68	26	21	8	7	
SMA12GWUU	12	— 9	15	21	42	70	28	24	8	6.5	
SMA13GWUU	13	0	15	22	44	75	30	24.5	8	6.5	
SMA16GWUU	16	— 10	19	25	50	85	38.5	32.5	9	6	
SMA20GWUU	20	0	21	27	54	96	41	35	11	7	
SMA25GWUU	25	— 10	26	38	76	130	51.5	42	12	4	
SMA30GWUU	30	0	30	39	78	140	59.5	49	15	5	
SMA35GWUU	35	— 12	34	45	90	155	68	54	18	5.5	
SMA40GWUU	40	0	40	51	102	175	78	62	20	5	
SMA50GWUU	50	0	52	61	122	215	102	80	25	5	
SMA60GWUU	60	0/-15	58	66	132	240	114	94	30	5	

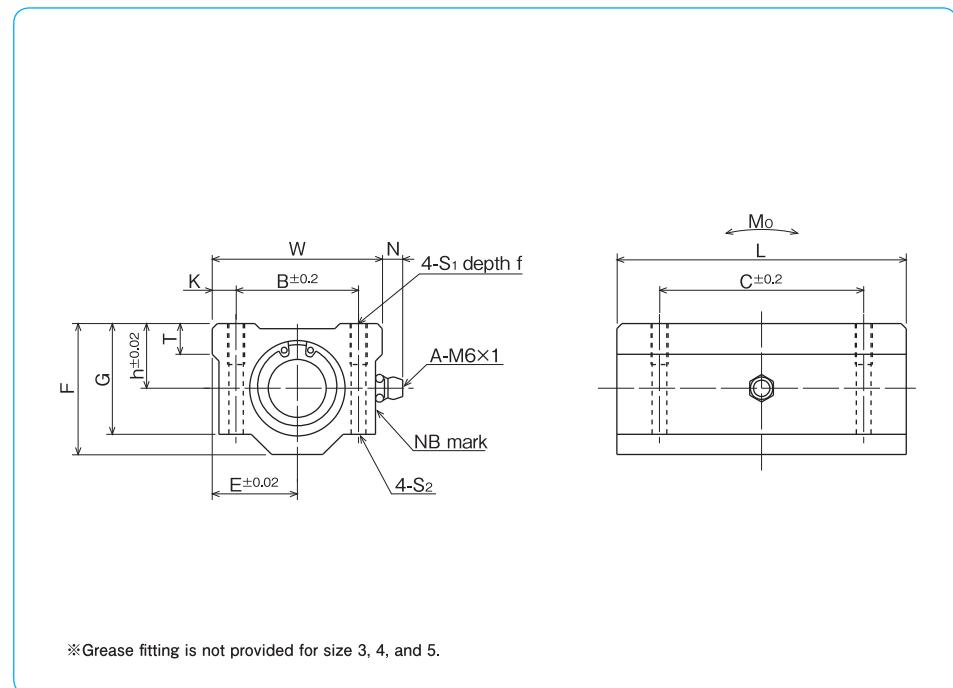

B mm	C mm	K mm	mounting dimensions			basic load rating dynamic C N	basic load rating static Co N	allowable static moment Mo N · m	mass g	shaft diameter mm
			S ₁	f mm	S ₂ mm					
11	16	2.5	M2	—	—	108	206	0.49	10	3
12	20	2.5	M3	—	—	137	255	0.72	13	4
16	25	3	M3	—	—	265	412	1.54	27	5
20	36	5	M4	8	3.4	323	530	2.18	63	6
24	42	5	M4	8	3.4	431	784	4.31	102	8
28	46	6	M5	12	4.3	588	1,100	7.24	180	10
30.5	50	5.75	M5	12	4.3	813	1,570	10.9	205	12
33	50	5.5	M5	12	4.3	813	1,570	11.6	240	13
36	60	7	M5	12	4.3	1,230	2,350	19.7	400	16
40	70	7	M6	12	5.2	1,400	2,740	26.8	570	20
54	100	11	M8	18	7	1,560	3,140	43.4	1,200	25
58	110	10	M8	18	7	2,490	5,490	82.8	1,480	30
70	120	10	M8	18	7	2,650	6,270	110	2,200	35
80	140	11	M10	25	8.7	3,430	8,040	147	3,200	40
100	160	11	M10	25	8.7	6,080	15,900	397	6,700	50
108	180	12	M12	25	10.7	7,550	20,000	530	8,560	60

1N ≈ 0.102kgf 1N · m ≈ 0.102kgf · m

AK TYPE


— Compact Block Type —

**part number structure**example **AKS 25 G UU**specification
AK: standard
AKS: anti-corrosionseal
blank: without seal
UU: seals on both sides

inner contact diameter

retainer material
blank: standard/steel
anti-corrosion/stainless steel
G: resin

part number	inner contact diameter mm	tolerance μm	outer dimensions						major dimensions	
			h mm	E mm	W mm	F mm	L mm	L ₂ mm	S ₁	
AK 6GUU	6		14	8	16	22	27	18	M4	
AK 8GUU	8		16	10	20	26	32	20	M5	
AK10GUU	10		19	13	26	32	39	27	M6	
AK12GUU	12		20	14	28	34	40	27	M6	
AK13GUU	13		25	15	30	43	42	28	M6	
AK16GUU	16		27	18	36	49	47	32	M6	
AK20GUU	20		31	21	42	54	52	36	M8	
AK25GUU	25		37	26	52	65	69	42	M10	
AK30GUU	30		40	29	58	71	74	44	M10	

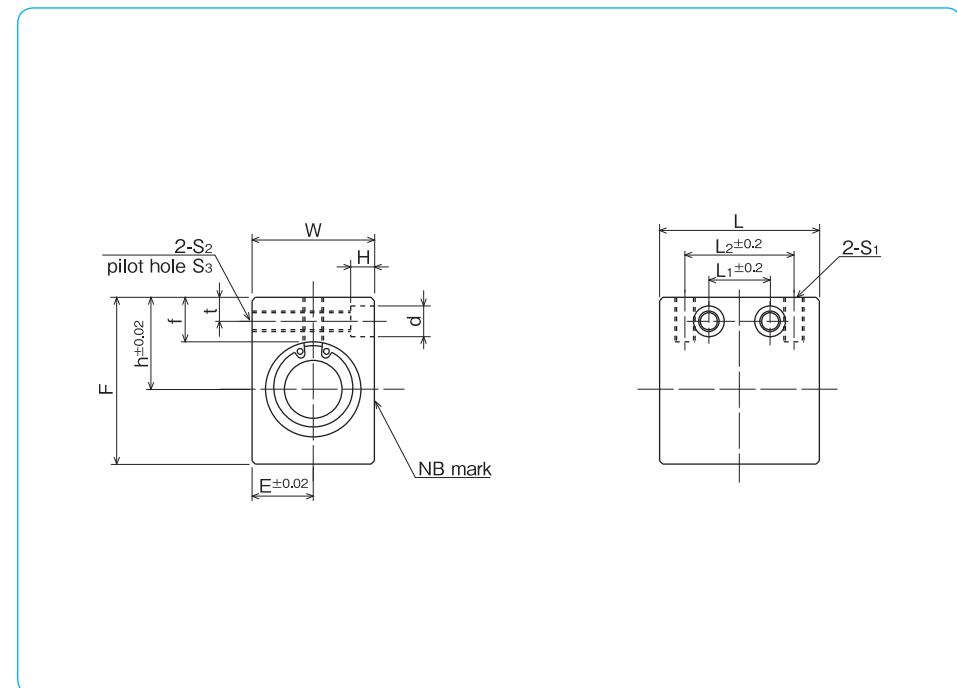


mounting dimensions							basic load rating dynamic C N	static Co N	mass g	shaft diameter mm
f mm	L ₁ mm	t mm	S ₂	S ₃ mm	d mm	H mm				
8	9	5	M4	3.5	6	5	206	265	25	6
8.5	10	5	M4	3.5	6	5	274	392	47	8
9.5	15	6	M5	4.5	8	6	372	549	98	10
9.5	15	6	M5	4.5	8	6	510	784	109	12
13.5	16	7	M6	5.2	9	7	510	784	154	13
13	18	7	M6	5.2	9	7	774	1,180	235	16
15	18	8	M8	7	11	8	882	1,370	302	20
17	22	9	M10	8.9	14	10	980	1,570	664	25
17.5	22	9	M10	8.9	14	10	1,570	2,740	800	30


1N = 0.102kgf

AK-W TYPE

— Double-Wide Compact Block Type —

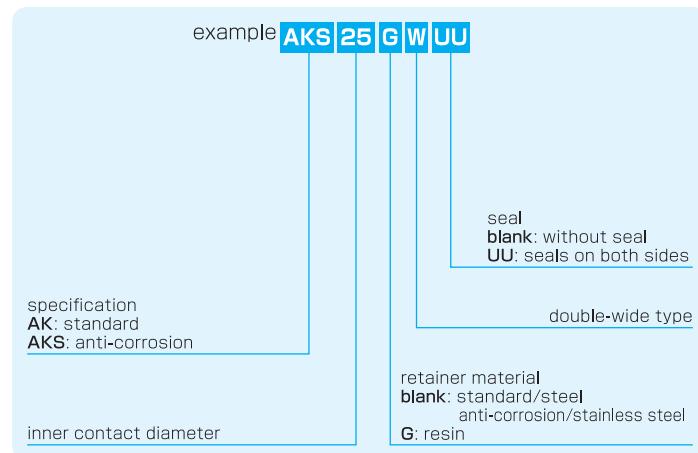**part number structure**

part number	inner contact diameter mm	tolerance μm	outer dimensions						major dimensions		
			h mm	E mm	W mm	F mm	L mm	L ₂ mm	S ₁		
AK 6GWUU	6		14	8	16	22	46	20	M4		
AK 8GWUU	8		16	10	20	26	56	30	M5		
AK10GWUU	10		19	13	26	32	68	36	M6		
AK12GWUU	12		20	14	28	34	70	36	M6		
AK13GWUU	13		25	15	30	43	74	42	M6		
AK16GWUU	16		27	18	36	49	84	52	M6		
AK20GWUU	20		31	21	42	54	94	58	M8		
AK25GWUU	25		37	26	52	65	128	80	M10		
AK30GWUU	30		40	29	58	71	138	90	M10		
		0									
		-10									

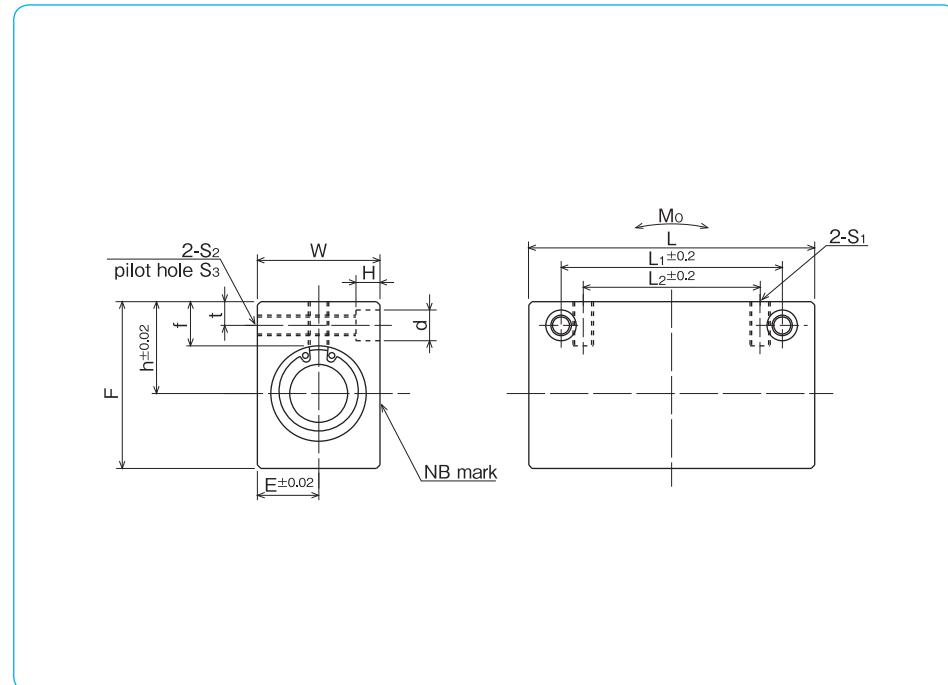

f mm	mounting dimensions						basic load rating dynamic C N	basic load rating static Co N	allowable static moment Mo N · m	mass g	shaft diameter mm
	L ₁ mm	t mm	S ₂	S ₃ mm	d mm	H mm					
8	30	5	M4	3.5	6	5	323	530	2.18	47	6
8.5	42	5	M4	3.5	6	5	431	784	4.31	89	8
9.5	50	6	M5	4.5	8	6	588	1,100	7.24	186	10
9.5	50	6	M5	4.5	8	6	813	1,570	10.9	206	12
13.5	55	7	M6	5.2	9	7	813	1,570	11.6	292	13
13	65	7	M6	5.2	9	7	1,230	2,350	19.7	445	16
15	70	8	M8	7	11	8	1,400	2,740	26.8	580	20
17	100	9	M10	8.9	14	10	1,560	3,140	43.4	1,300	25
17.5	110	9	M10	8.9	14	10	2,490	5,490	82.8	1,560	30

1N = 0.102kgf 1N · m = 0.102kgf · m

SMP TYPE

— Pillow Block Type —


**part number structure**

example	SMP	25	G	UU
SMP type				
inner contact diameter				

seal
blank: without seal
UU: seals on both sides

retainer material
blank: steel
G: resin

part number	inner contact diameter		outer dimensions							major dimensions		
	mm	tolerance μm	h mm	E mm	W mm	L mm	F mm	G mm	M mm			
SMP13GUU	13	0	25	25	50	32	46	8	36			
SMP16GUU	16	-9	29	27.5	55	37	53	10	40			
SMP20GUU	20	0	34	32.5	65	42	62	12	48			
SMP25GUU	25	-10	40	38	76	59	73	12	59			
SMP30GUU	30		45	42.5	85	64	84	15	69			
SMP35GUU	35	0	50	49	98	70	94	15	76			
SMP40GUU	40	-12	60	62	124	80	112	18	86			
SMP50GUU	50		70	72	144	100	134	20	105			
SMP60GUU	60	0/-15	82	84.5	169	110	154	23	115			

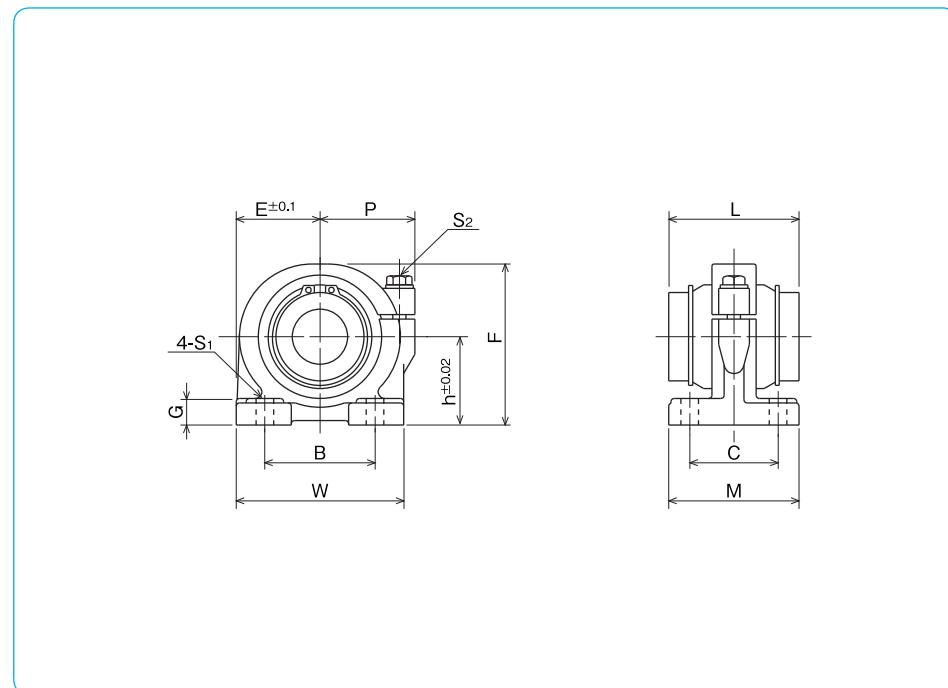

P mm	mounting dimensions			adjustment screw size S ₂	recommended torque N·m	basic load rating dynamic C N	basic load rating static Co N	mass g	shaft diameter mm
	B mm	C mm	S ₁ mm						
30	30	26	7 (M5)	M5	3	510	784	270	13
32	35	29	7 (M5)	M5	3	774	1,180	380	16
37	40	35	8 (M6)	M6	5.5	882	1,370	680	20
43	50	40	8 (M6)	M6	5.5	980	1,570	1,000	25
49	58	46	10 (M8)	M8	13.5	1,570	2,740	1,400	30
58	62	53	12 (M10)	M10	29	1,670	3,140	2,100	35
68	76	64	12 (M10)	M10	29	2,160	4,020	3,700	40
80	100	70	14 (M12)	M12	29	3,820	7,940	6,100	50
88	115	80	14 (M12)	M12	29	4,700	10,000	8,700	60

1N ≈ 0.102kgf

SMJ TYPE

— Clearance Adjustable Type —

**part number structure**example **SMSJ 25 G UU**

specification
SMSJ: standard
SMSJ: anti-corrosion


seal
blank: without seal
UU: seals on both sides

inner contact diameter

retainer material
blank: standard/steel*
anti-corrosion/stainless steel*
G: resin

*Size 10 is provided with resin retainer type only.

part number	inner contact diameter mm	h mm	outer dimensions						major dimensions		
			E mm	W mm	L mm	F mm	G mm	T mm	B mm		
SMJ10GUU	10	13	20	40	35	26	21	8	28		
SMJ12GUU	12	15	21	42	36	28	24	8	30.5		
SMJ13GUU	13	15	22	44	39	30	24.5	8	33		
SMJ16GUU	16	19	25	50	44	38.5	32.5	9	36		
SMJ20GUU	20	21	27	54	50	41	35	11	40		
SMJ25GUU	25	26	38	76	67	51.5	42	12	54		
SMJ30GUU	30	30	39	78	72	59.5	49	15	58		
SMJ35GUU	35	34	45	90	80	68	54	18	70		
SMJ40GUU	40	40	51	102	90	78	62	20	80		
SMJ50GUU	50	52	61	122	110	102	80	25	100		
SMJ60GUU	60	58	66	132	122	114	94	30	108		

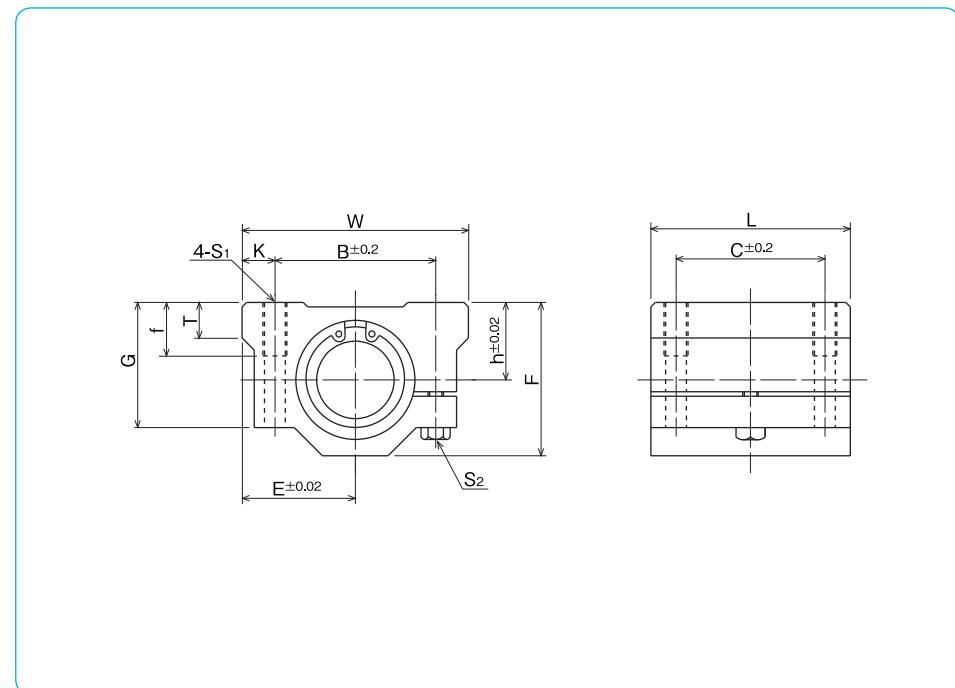

C mm	K mm	S ₁	f mm	adjustment screw size S ₂	basic load rating		mass g	shaft diameter mm
					dynamic C N	static Co N		
21	6	M5	12	M4	372	549	92	10
26	5.75	M5	12	M4	510	784	102	12
26	5.5	M5	12	M4	510	784	120	13
34	7	M5	12	M4	774	1,180	200	16
40	7	M6	12	M5	882	1,370	255	20
50	11	M8	18	M6	980	1,570	600	25
58	10	M8	18	M6	1,570	2,740	735	30
60	10	M8	18	M6	1,670	3,140	1,100	35
60	11	M10	25	M8	2,160	4,020	1,590	40
80	11	M10	25	M8	3,820	7,940	3,340	50
90	12	M12	25	M10	4,700	10,000	4,270	60

1N=0.102kgf

SME TYPE

— Open Block Type —

**part number structure**example **SMSE 25 G UU**

specification
SMSE: standard
SMSE: anti-corrosion


seal
blank: without seal
UU: seals on both sides

inner contact diameter

retainer material
blank: standard/steel*
anti-corrosion/stainless steel*
G: resin

*Size 10 is provided with resin retainer type only.

part number	inner contact diameter mm	h mm	outer dimensions						major dimensions		
			E mm	W mm	L mm	F mm	T mm	h1 mm	θ		
SME10GUU	10	15	18	36	32	24	7	6	80°		
SME13GUU	13	17	20	40	39	28	8	8.5	80°		
SME16GUU	16	20	22.5	45	45	33	9	10	80°		
SME20GUU	20	23	24	48	50	39	11	10	60°		
SME25GUU	25	27	30	60	65	47	14	11.5	50°		
SME30GUU	30	33	35	70	70	56	15	14	50°		
SME35GUU	35	37	40	80	80	63	18	16	50°		
SME40GUU	40	42	45	90	90	72	20	19	50°		
SME50GUU	50	53	60	120	110	92	25	23	50°		

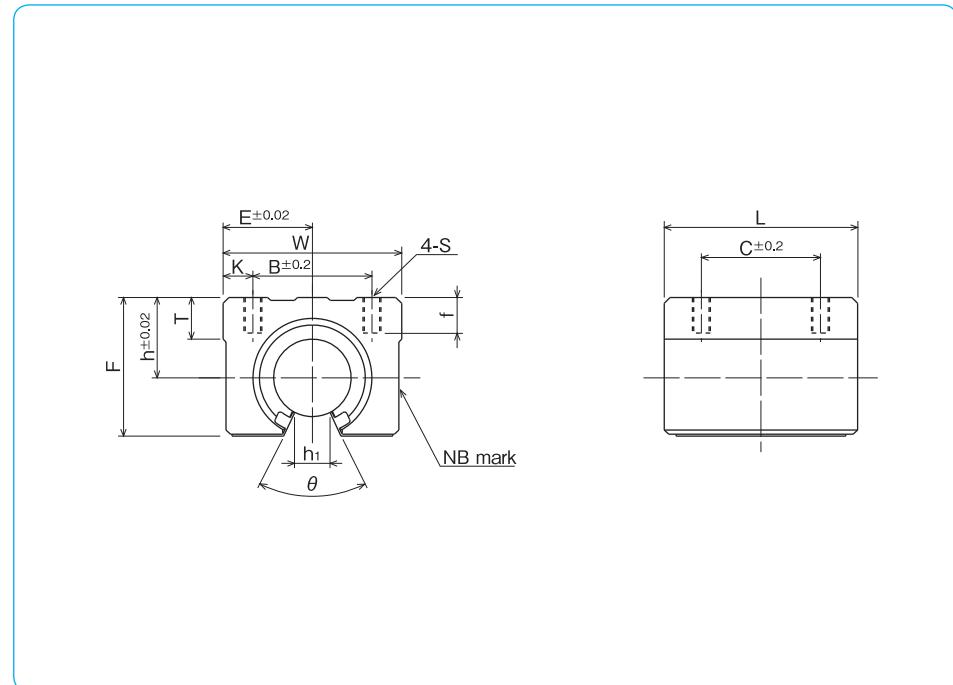

B mm	C mm	K mm	S	f mm	mounting dimensions		mass g	shaft diameter mm
					dynamic C N	static Co N		
25	20	5.5	M5	10	372	549	65	10
28	26	6	M5	10	510	784	100	13
32	30	6.5	M5	12	774	1,180	150	16
35	35	6.5	M6	12	882	1,370	200	20
40	40	10	M6	12	980	1,570	450	25
50	50	10	M8	18	1,570	2,740	630	30
55	55	12.5	M8	18	1,670	3,140	925	35
65	65	12.5	M10	20	2,160	4,020	1,330	40
94	80	13	M10	20	3,820	7,940	3,000	50

1N ≈ 0.102kgf

SME-W TYPE

— Double-wide Open Block Type —

**part number structure**example **SMSE 25 G W UU**specification
SMSE: standard
SMSE: anti-corrosionseal
blank: without seal
UU: seals on both sides


double-wide type

inner contact diameter

retainer material
blank: standard/steel*
anti-corrosion/stainless steel*
G: resin

*Size 10 is provided with resin retainer type only.

part number	inner contact diameter mm	outer dimensions										major dimensions	
		h mm	E mm	W mm	L mm	F mm	T mm	N mm	h ₁ mm	θ			
SME10GWUU	10	15	18	36	65	24	7	7.5	6	80°			
SME13GWUU	13	17	20	40	75	28	8	7.5	8.5	80°			
SME16GWUU	16	20	22.5	45	85	33	9	7.5	10	80°			
SME20GWUU	20	23	24	48	95	39	11	7.5	10	60°			
SME25GWUU	25	27	30	60	130	47	14	7.5	11.5	50°			
SME30GWUU	30	33	35	70	140	56	15	7.5	14	50°			

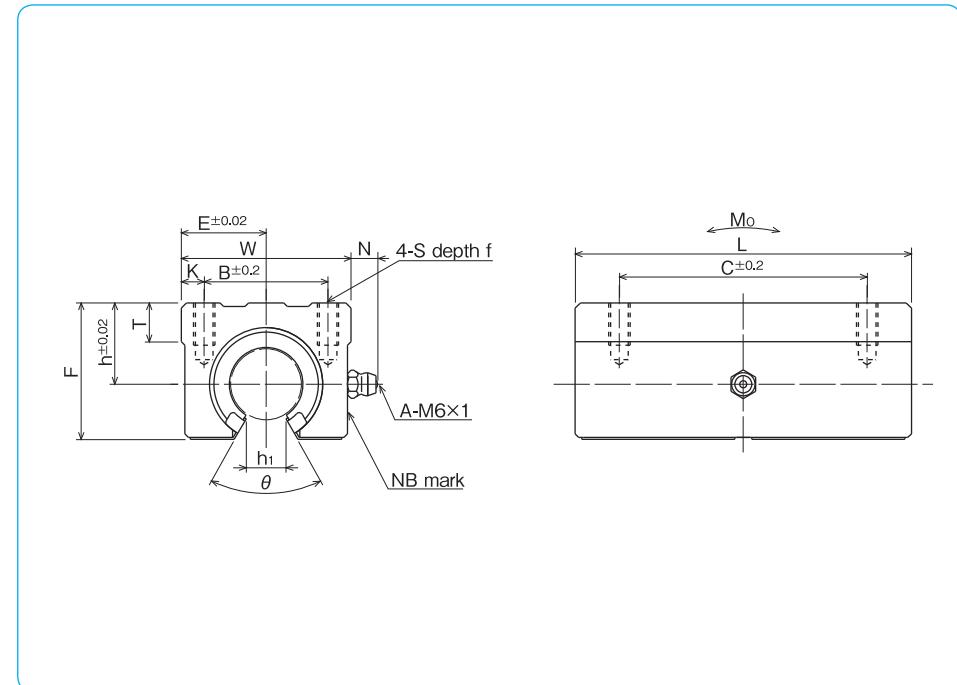

B mm	mounting dimensions				f mm	basic load rating dynamic C N	basic load rating static Co N	allowable static moment Mo N·m	mass g	shaft diameter mm
	C mm	K mm	S							
25	40	5.5	M5	10	588	1,100	4.63	140	10	
28	50	6	M5	10	813	1,570	7.42	200	13	
32	60	6.5	M5	12	1,230	2,350	12.6	300	16	
35	70	6.5	M6	12	1,400	2,740	14.5	400	20	
40	90	10	M6	12	1,560	3,140	24.7	900	25	
50	100	10	M8	18	2,490	5,490	47.2	1,260	30	

1N ≈ 0.102kgf 1N · m ≈ 0.102kgf · m

SMD TYPE


— Open Block with Clearance Adjustable Type —

**part number structure**example **SMSD 25 G UU**specification
SMD: standard
SMSD: anti-corrosionseal
blank: without seal
UU: seals on both sides

inner contact diameter

retainer material
blank: standard/steel
anti-corrosion/stainless steel
G: resin

part number	inner contact diameter mm	outer dimensions										major dimensions	
		h mm	E mm	W mm	L mm	F mm	T mm	G mm	h ₁ mm	θ			
SMD16GUU	16	20	25	50	45	33	9	6	10	80°			
SMD20GUU	20	23	27	54	50	39	11	7	10	60°			
SMD25GUU	25	27	38	76	65	47	14	7	11.5	50°			
SMD30GUU	30	33	39	78	70	56	15	7	14	50°			

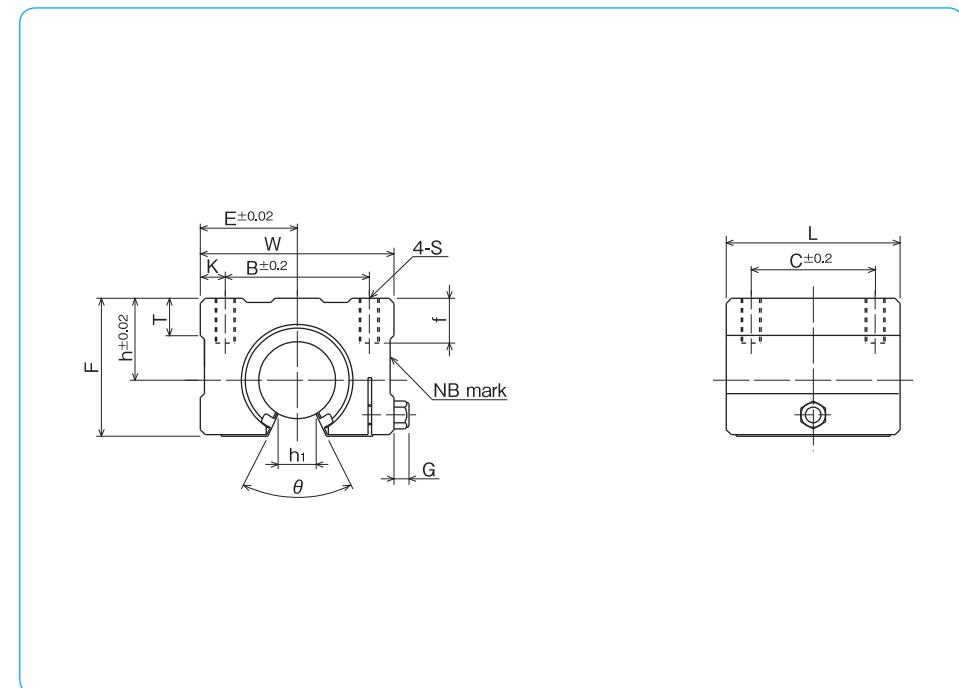


B mm	mounting dimensions				f mm	basic load rating		mass g	shaft diameter mm
	C mm	K mm	S	C N		dynamic C N	static Co N		
36	30	7	M5	12	774	1,180	170	16	
40	35	7	M6	12	882	1,370	240	20	
54	40	11	M6	12	980	1,570	580	25	
58	50	10	M8	18	1,570	2,740	720	30	

1N=0.102kgf


CE TYPE

— Non-Clearance Adjustable Type —

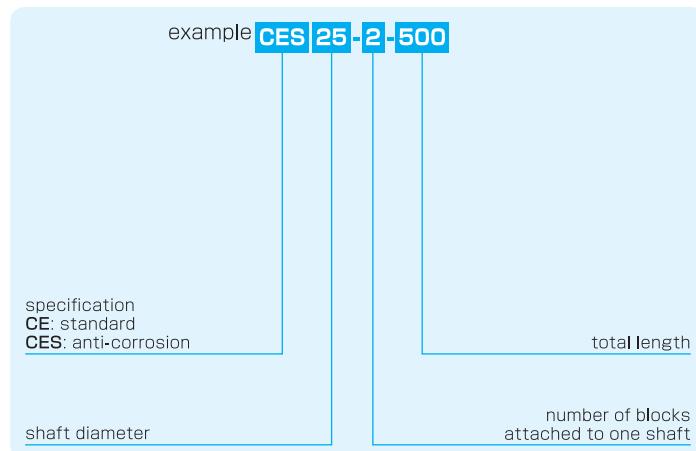**part number structure**

※Inside bush is a resin retainer type with seals.

part number		shaft diameter tolerance g6 μm	assembly dimension			block dimension						major dimensions								
standard	anti-corrosion		H	h	W ₁	W ₂	F	L ₁	B ₁	C	K	T ₁	S ₁	f	W ₃	B ₂	T ₂	P	S ₂	
CE16	CES16	16	— 6 — 17	45	25	2.5	45	33	45	32	30	6.5	9	M5	12	40	30	5	150	5.5
CE20	CES20	20	— 7 — 20	50	27	1.5	48	39	50	35	35	6.5	11	M6	12	45	30	5	150	5.5
CE25	CES25	25		60	33	2.5	60	47	65	40	40	10	14	M6	12	55	35	6	200	6.5
CE30	CES30	30		70	37	5	70	56	70	50	50	10	15	M8	18	60	40	7	200	6.5

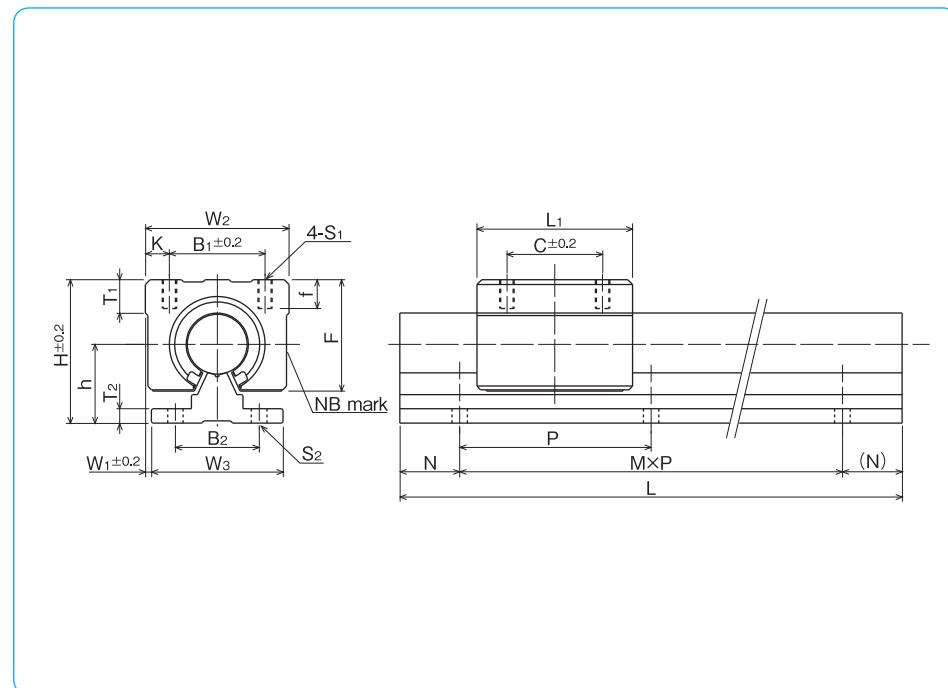


support rail dimensions L (M,N) mm				basic load rating dynamic C N	static Co N	mass block g	mass rail kg/m	size
300 (1,75)	500 (3,25)	800 (5,25)	1,000 (6,50)	774	1,180	150	2.58	16
1,500 (9,75)	1,800 (11,75)	2,000 (13,25)						
300 (1,75)	500 (3,25)	800 (5,25)	1,000 (6,50)	882	1,370	200	3.49	20
1,500 (9,75)	1,800 (11,75)	2,000 (13,25)						
300 (1,50)	500 (2,50)	800 (3,100)	1,000 (4,100)	980	1,570	450	5.31	25
1,500 (7,50)	1,800 (8,100)	2,000 (9,100)						
300 (1,50)	500 (2,50)	800 (3,100)	1,000 (4,100)	1,570	2,740	630	7.39	30
1,500 (7,50)	1,800 (8,100)	2,000 (9,100)						

1N=0.102kgf


CD TYPE

— Clearance Adjustable Type —

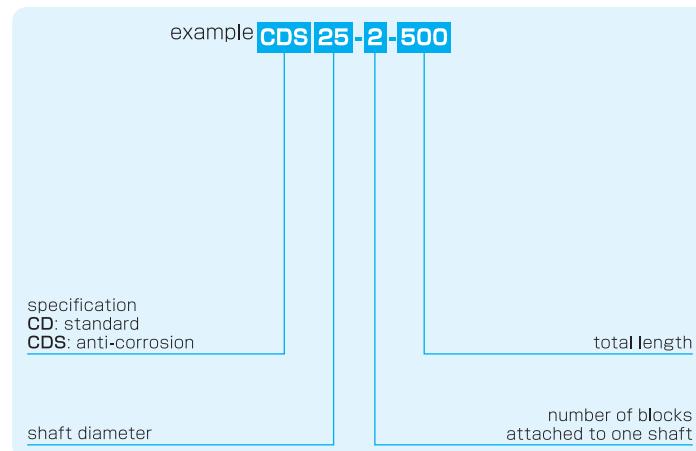**part number structure**

※Inside bush is a resin retainer type with seals.

part number		shaft diameter	assembly dimension			block dimension										major dimensions									
standard	anti-corrosion	tolerance g6 μm	H	h	W ₁	W ₂	F	L ₁	B ₁	C	K	T ₁	S ₁	f	G	W ₃	B ₂	T ₂	P	S ₂					
CD16	CDS16	16	-6 -17	45	25	5	50	33	45	36	30	7	9	M5	12	6	40	30	5	150	5.5				
CD20	CDS20	20	-7 -20	50	27	4.5	54	39	50	40	35	7	11	M6	12	7	45	30	5	150	5.5				
CD25	CDS25	25		60	33	10.5	76	47	65	54	40	11	12	M6	12	7	55	35	6	200	6.5				
CD30	CDS30	30		70	37	9	78	56	70	58	50	10	15	M8	18	7	60	40	7	200	6.5				

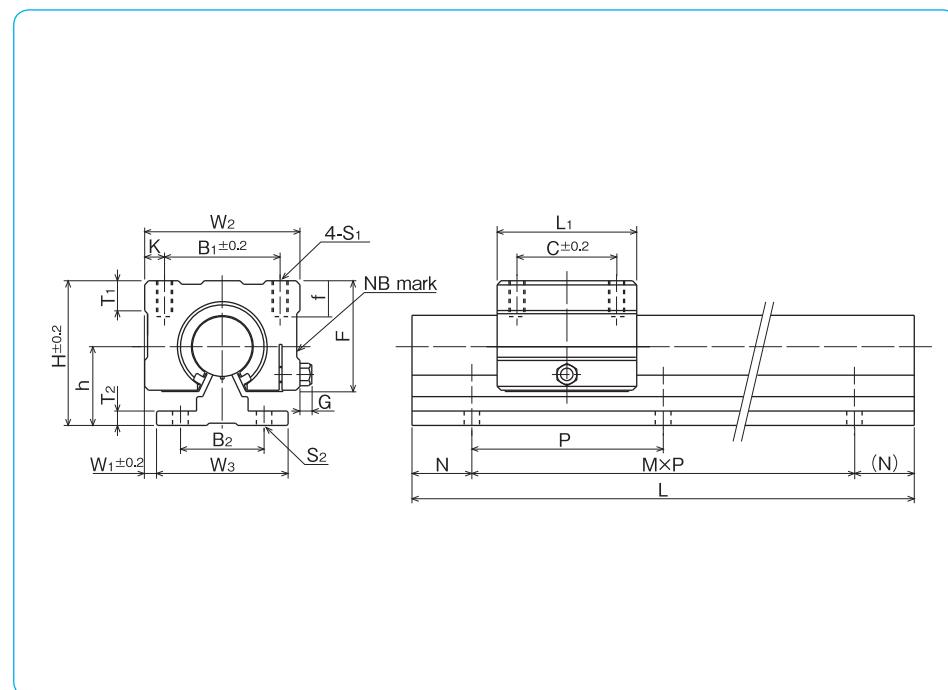

support rail dimensions L (M,N) mm				basic load rating dynamic C N	static Co N	mass block g	mass rail kg/m	size
300 (1,75)	500 (3,25)	800 (5,25)	1,000 (6,50)	774	1,180	170	2.58	16
1,500 (9,75)	1,800 (11,75)	2,000 (13,25)						
300 (1,75)	500 (3,25)	800 (5,25)	1,000 (6,50)	882	1,370	240	3.49	20
1,500 (9,75)	1,800 (11,75)	2,000 (13,25)						
300 (1,50)	500 (2,50)	800 (3,100)	1,000 (4,100)	980	1,570	580	5.31	25
1,500 (7,50)	1,800 (8,100)	2,000 (9,100)						
300 (1,50)	500 (2,50)	800 (3,100)	1,000 (4,100)	1,570	2,740	720	7.39	30
1,500 (7,50)	1,800 (8,100)	2,000 (9,100)						

1N ≈ 0.102kgf


SWA TYPE (Inch Standard)

— Block Type —



part number structure

example	SWA 20 G R UU
specification	
SWA: standard	
SWSA: anti-corrosion	
size	
retainer material	
blank: standard/steel	
anti-corrosion/stainless steel	
G: resin	
seal	
blank: without seal	
UU: seals on both sides	
self-aligning	
(SWA-resin retainer only)	

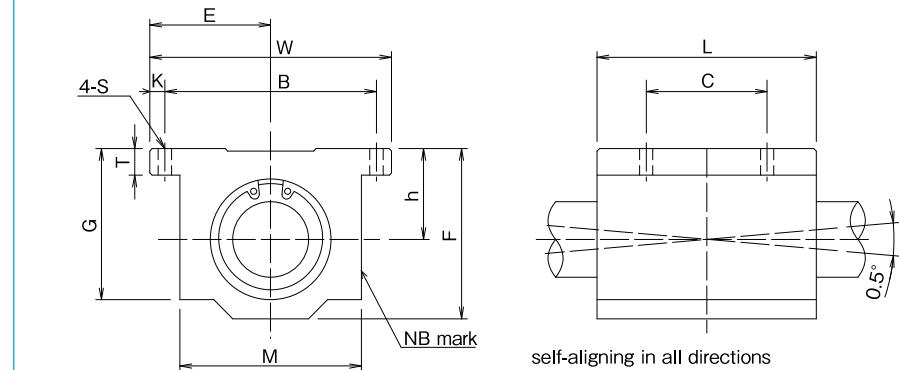self-aligning in all directions
by using SWA...GRUU

part number	inner contact diameter		major dimensions				
	inch/(mm)	tolerance inch/(\mu m)	h ±.001/±(±0.02) inch/(mm)	E ±.001/±(±0.02) inch/(mm)	W inch/(mm)	L inch/(mm)	F inch/(mm)
SWA 4GUU (6.350)	.2500 (6.350)		.4370 (11.100)	.8125 (20.638)	1.625 (41.28)	1.188 (30.16)	.813 (20.64)
SWA 6GUU (9.525)	.3750 (9.525)	0 −.00040 (-9)	.5000 (12.700)	.8750 (22.225)	1.750 (44.45)	1.313 (33.34)	.938 (23.82)
SWA 8GUU (12.700)	.5000 (12.700)		.6870 (17.450)	1.0000 (25.400)	2.000 (50.80)	1.688 (42.86)	1.250 (31.75)
SWA 10GUU (15.875)	.6250 (15.875)		.8750 (22.225)	1.2500 (31.750)	2.500 (63.50)	1.938 (49.21)	1.625 (41.28)
SWA 12GUU (19.050)	.7500 (19.050)	0 −.00040 (-10)	.9370 (23.800)	1.3750 (34.925)	2.750 (69.85)	2.063 (52.39)	1.750 (44.45)
SWA 16GUU (25.400)	1.0000 (25.400)		1.1870 (30.150)	1.6250 (41.275)	3.250 (82.55)	2.813 (71.44)	2.188 (55.56)
SWA 20GUU (31.750)	1.2500 (31.750)	0 −.00050 (-12)	1.5000 (38.100)	2.0000 (50.800)	4.000 (101.60)	3.625 (92.08)	2.813 (71.44)
SWA 24GUU (38.100)	1.5000 (38.100)		1.7500 (44.450)	2.3750 (60.325)	4.750 (120.65)	4.000 (101.60)	3.250 (82.55)
SWA 32GUU (50.800)	2.0000 (50.800)		2.1250 (53.975)	3.0000 (76.200)	6.000 (152.40)	5.000 (127.00)	4.063 (103.19)

Product of NB Corporation of America

T	G	M	mounting dimensions			S	basic load rating dynamic C N	static Co N	mass g
			B ±.01/±(±0.2) inch/(mm)	C ±.01/±(±0.2) inch/(mm)	K inch/(mm)				
.188 (4.76)	.750 (19.05)	1.000 (25.40)	1.312 (33.33)	.750 (19.05)	.156 (3.96)	.156 (3.96)	206	265	45
.188 (4.76)	.875 (22.23)	1.125 (28.58)	1.437 (36.50)	.875 (22.23)	.156 (3.96)	.156 (3.96)	225	314	62
.250 (6.35)	1.125 (28.58)	1.375 (34.93)	1.688 (42.88)	1.000 (25.40)	.156 (3.96)	.156 (3.96)	510	784	130
.281 (7.14)	1.437 (36.50)	1.750 (44.45)	2.125 (53.98)	1.125 (28.58)	.188 (4.76)	.188 (4.76)	774	1,180	240
.313 (7.94)	1.563 (39.69)	1.875 (47.63)	2.375 (60.33)	1.250 (31.75)	.188 (4.76)	.188 (4.76)	862	1,370	290
.375 (9.53)	1.938 (49.21)	2.375 (60.33)	2.875 (73.03)	1.750 (44.45)	.188 (4.76)	.219 (5.56)	980	1,570	615
.438 (11.11)	2.500 (63.50)	3.000 (76.20)	3.500 (88.90)	2.000 (50.80)	.250 (6.35)	.219 (5.56)	1,570	2,740	1,300
.500 (12.70)	2.875 (73.03)	3.500 (88.90)	4.125 (104.78)	2.500 (63.50)	.313 (7.94)	.281 (7.14)	2,160	4,020	1,900
.625 (15.88)	3.625 (92.08)	4.500 (114.30)	5.250 (133.35)	3.250 (82.55)	.375 (9.53)	.413 (10.50)	3,820	7,940	3,600

SI UNIT 1N=0.225lb
1kg=2.205lbs


SWJ TYPE (Inch Standard)

— Clearance Adjustable Block Type —



part number structure

example	SWJ 20 G R UU
specification	
SWJ: standard	
SWSJ: anti-corrosion	
size	
retainer material	
blank: standard/steel	
anti-corrosion/stainless steel	
G: resin	
seal	
blank: without seal	
UU: seals on both sides	
self-aligning	
(SWJ-resin retainer only)	

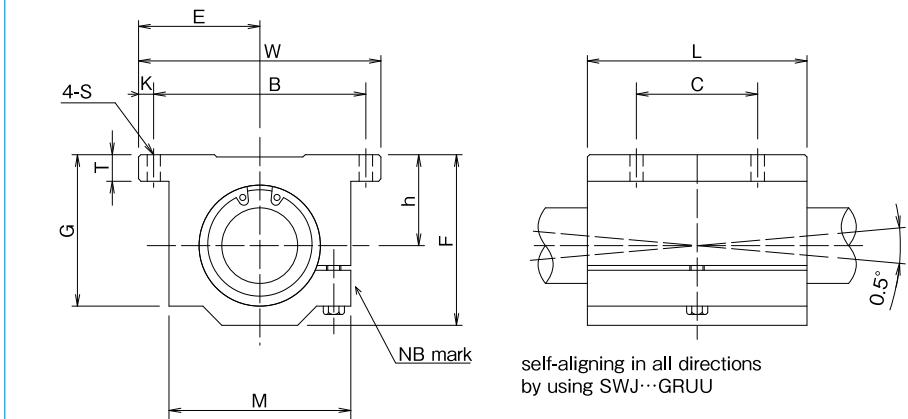

self-aligning in all directions
by using SWJ-GRUU

part number	inner contact diameter inch/(mm)	major dimensions outer dimensions				
		h ±.001/±(±0.02) inch/(mm)	E ±.001/±(±0.02) inch/(mm)	W inch/(mm)	L inch/(mm)	F inch/(mm)
SWJ 4GUU	.2500 (6.350)	.4370 (11.100)	.8125 (20.638)	1.625 (41.28)	1.188 (30.16)	.813 (20.64)
SWJ 6GUU	.3750 (9.525)	.5000 (12.700)	.8750 (22.225)	1.750 (44.45)	1.313 (33.34)	.938 (23.82)
SWJ 8GUU	.5000 (12.700)	.6870 (17.450)	1.0000 (25.400)	2.000 (50.80)	1.688 (42.86)	1.250 (31.75)
SWJ 10GUU	.6250 (15.875)	.8750 (22.225)	1.2500 (31.750)	2.500 (63.50)	1.938 (49.21)	1.625 (41.28)
SWJ 12GUU	.7500 (19.050)	.9370 (23.800)	1.3750 (34.925)	2.750 (69.85)	2.063 (52.39)	1.750 (44.45)
SWJ 16GUU	1.0000 (25.400)	1.1870 (30.150)	1.6250 (41.275)	3.250 (82.55)	2.813 (71.44)	2.188 (55.56)
SWJ 20GUU	1.2500 (31.750)	1.5000 (38.100)	2.0000 (50.800)	4.000 (101.60)	3.625 (92.08)	2.813 (71.44)
SWJ 24GUU	1.5000 (38.100)	1.7500 (44.450)	2.3750 (60.325)	4.750 (120.65)	4.000 (101.60)	3.250 (82.55)
SWJ 32GUU	2.0000 (50.800)	2.1250 (53.975)	3.0000 (76.200)	6.000 (152.40)	5.000 (127.00)	4.063 (103.19)

Product of NB Corporation of America

T inch/(mm)	G inch/(mm)	M inch/(mm)	mounting dimensions			S inch/(mm)	basic load rating dynamic C N	basic load rating static Co N	mass g
			B ±.01/±(±0.2) inch/(mm)	C ±.01/±(±0.2) inch/(mm)	K inch/(mm)				
.188 (4.76)	.750 (19.05)	1.000 (25.40)	1.312 (33.33)	.750 (19.05)	.156 (3.96)	.156 (3.96)	206	265	45
.188 (4.76)	.875 (22.23)	1.125 (28.58)	1.437 (36.50)	.875 (22.23)	.156 (3.96)	.156 (3.96)	225	315	62
.250 (6.35)	1.125 (28.58)	1.375 (34.93)	1.688 (42.88)	1.000 (25.40)	.156 (3.96)	.156 (3.96)	510	784	130
.281 (7.14)	1.437 (36.50)	1.750 (44.45)	2.125 (53.98)	1.125 (28.58)	.188 (4.76)	.188 (4.76)	774	1,180	240
.313 (7.94)	1.563 (39.69)	1.875 (47.63)	2.375 (60.33)	1.250 (31.75)	.188 (4.76)	.188 (4.76)	862	1,370	290
.375 (9.53)	1.938 (49.21)	2.375 (60.33)	2.875 (73.03)	1.750 (44.45)	.188 (4.76)	.219 (5.56)	980	1,570	615
.438 (11.11)	2.500 (63.50)	3.000 (76.20)	3.500 (88.90)	2.000 (50.80)	.250 (6.35)	.219 (5.56)	1,570	2,740	1,300
.500 (12.70)	2.875 (73.03)	3.500 (88.90)	4.125 (104.78)	2.500 (50.80)	.313 (7.94)	.281 (7.14)	2,160	4,020	1,900
.625 (15.88)	3.625 (92.08)	4.500 (114.30)	5.250 (133.35)	3.250 (82.55)	.375 (9.53)	.413 (10.50)	3,820	7,940	3,600

SI UNIT 1N=0.225lb
1kg=2.205lbs


SWD TYPE (Inch Standard)

— Open Block Type —



part number structure

example	SWD	20	G	R	UU
specification SWD: standard SWSD: anti-corrosion					
size retainer material blank: standard/steel anti-corrosion/stainless steel G: resin					
seal blank: without seal UU: seals on both sides					
self-aligning (SWD-resin retainer only)					

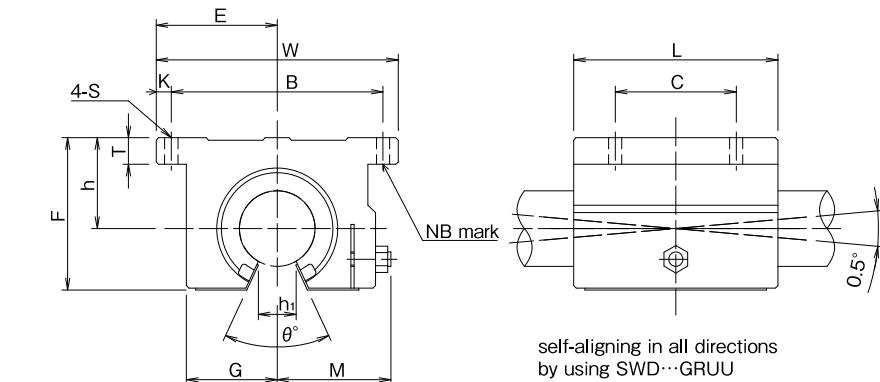

self-aligning in all directions
by using SWD...GRUU

part number	inner contact diameter inch/(mm)	major dimensions outer dimensions						
		h ±.001/±0.02 inch/(mm)	E ±.001/±0.02 inch/(mm)	W inch/(mm)	L inch/(mm)	F inch/(mm)	T inch/(mm)	G inch/(mm)
SWD 8GUU (12.700)	.5000 (12.700)	.6870 (17.450)	1.0000 (25.400)	2.000 (50.80)	1.500 (38.10)	1.100 (27.94)	.250 (6.35)	.688 (17.5)
SWD 10GUU (15.875)	.6250 (15.875)	.8750 (22.225)	1.2500 (31.750)	2.500 (63.50)	1.750 (44.45)	1.375 (34.93)	.281 (7.14)	.875 (22.23)
SWD 12GUU (19.050)	.7500 (19.050)	.9370 (23.800)	1.3750 (34.950)	2.750 (69.85)	1.875 (47.63)	1.535 (39.00)	.315 (8.00)	.937 (23.80)
SWD 16GUU (25.400)	1.0000 (25.400)	1.1870 (30.150)	1.6250 (41.300)	3.250 (82.55)	2.625 (66.68)	1.975 (50.17)	.375 (9.53)	1.188 (30.18)
SWD 20GUU (31.750)	1.2500 (31.750)	1.5000 (38.100)	2.0000 (50.800)	4.000 (101.60)	3.375 (85.73)	2.485 (63.12)	.437 (11.10)	1.500 (38.10)
SWD 24GUU (38.100)	1.5000 (38.100)	1.7500 (44.450)	2.3750 (60.325)	4.750 (120.65)	3.750 (95.25)	2.910 (73.90)	.500 (12.70)	1.750 (44.45)
SWD 32GUU (50.800)	2.0000 (50.800)	2.1250 (53.975)	3.0000 (76.200)	6.000 (152.4)	4.750 (120.65)	3.660 (92.90)	.625 (15.88)	2.250 (57.15)

Product of NB Corporation of America

M inch/(mm)	h1 inch/(mm)	θ	mounting dimensions				basic load rating dynamic C N	basic load rating static Co N	mass g
			B ±.01/±0.02 inch/(mm)	C ±.01/±0.02 inch/(mm)	K inch/(mm)	S inch/(mm)			
.98 (24.89)	.3425 (8.70)	80°	1.688 (42.88)	1.000 (25.40)	.156 (3.96)	.156 (3.96)	510	784	98
1.15 (29.21)	.375 (9.53)	80°	2.125 (53.98)	1.125 (28.58)	.188 (4.76)	.188 (4.76)	774	1,180	185
1.23 (31.24)	.4375 (11.11)	60°	2.375 (60.33)	1.250 (31.75)	.188 (4.76)	.188 (4.76)	862	1,370	235
1.48 (37.59)	.5625 (14.29)	50°	2.875 (73.03)	1.750 (44.45)	.188 (4.76)	.219 (5.56)	980	1,570	530
1.88 (47.75)	.625 (15.88)	50°	3.500 (88.90)	2.000 (50.80)	.250 (6.35)	.219 (5.56)	1,570	2,740	1,080
2.12 (53.85)	.750 (19.05)	50°	4.125 (104.78)	2.500 (63.50)	.313 (7.94)	.281 (7.14)	2,160	4,020	1,620
2.70 (68.58)	1.00 (25.40)	50°	5.250 (133.35)	3.250 (82.55)	.375 (9.53)	.413 (10.50)	3,820	7,940	3,100

SI UNIT 1N≈0.225lb

1kg≈2.205lbs