

ACTUATOR Type BG15

New line up to BG type Actuator Size 15

The Smallest in BG Series

The BG actuator is an integration of precision ball screw and guide block. BG15 with a height of 15mm further contributes to compact design of machinery.

High Positioning Accuracy

Assured accuracies are as follows.

Positioning repeatability:

±3microns High grade (H)

±1micron Precision grade (P)

Backlash:

5microns High grade (H)

2microns Precision grade (P)

Positioning Pin Hole

As an option, positioning pin holes are provided on the sub-table and guide rail. It is useful to maintain mounting accuracy when reassembly of work table or guide rail is required.



PART NUMBER STRUCTURE

①	②	③	④	⑤	⑥	⑦	⑧	⑨	⑩
BG	15	01	A	75	H	A0			P△□
		02	B	100	P	A1	C	K	
				125		A2	J○○		G▲
				150		A3			LB
				175		A4			PNP
				200		A5			
						A6			
						A7			
						RO			

① BG type

② size

③ ball screw lead

④ type of block

A : with 1 long block

B : with 2 long blocks

* Drive block is located closest to motor bracket side.

⑤ guide rail length

⑥ accuracy grade

H : high grade

P : precision grade

⑦ motor bracket (Please contact NB for details)

⑧ cover and bellows

none : without top cover

C : with top cover + sub table

J : with bellows

⑨ sensor

none : without sensor

K : with proximity sensor

⑩ option

none : without option

P : with positioning pin hole

G : with special grease option

LB : with low temperature black chrome treatment

PNP : with PNP sensor

Please contact NB for details.



NIPPON BEARING CO., LTD.

2833 Chiya, Ojiya-city, Niigata-pref., 947-8503 JAPAN

Phone: 81-258-82-0011 FAX: 81-258-81-1135 <http://www.nb-linear.co.jp>

NB Corporation of America

930 Muirfield Drive, Hanover Park,
IL 60133, U.S.A.
Phone: 1(630)295-8880
FAX: 1(630)295-8881
TOLL FREE: (800)521-2045
<http://www.nbcorporation.com>
info@nbcorporation.com

Western Regional Office
2157 O'Toole Ave., Suite D,
San Jose, CA 95131, U.S.A.
Phone: 1(408)435-1800
FAX: 1(408)435-1850
TOLL FREE: (888)562-4175




Eastern Regional Office
41 Orchard Street, Ramsey,
NJ 07446, U.S.A.
Phone: 1(201)236-3886
FAX: 1(201)236-5112
TOLL FREE: (800)981-8190

NB Europe B.V.




Boekweitstraat 21, 2153 GK Nieuw-Vennep,
The Netherlands
Phone: +31 (0)252-463-200
FAX: +31 (0)252-463-209
<http://www.nbeurope.com>
info@nbeurope.com

BG15A, B

—Without Top Cover—

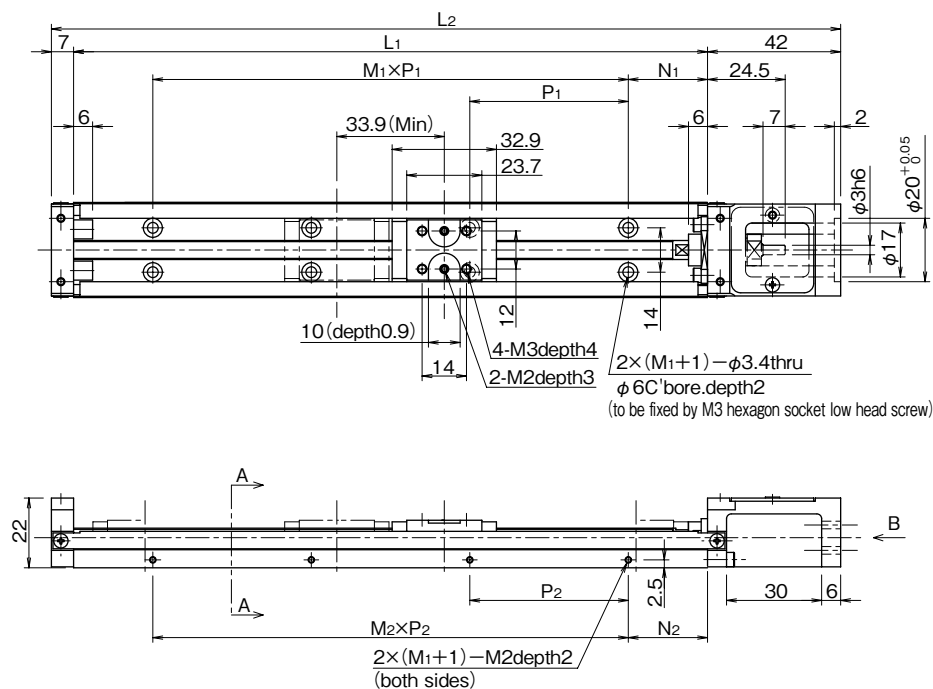

—With Top Cover—

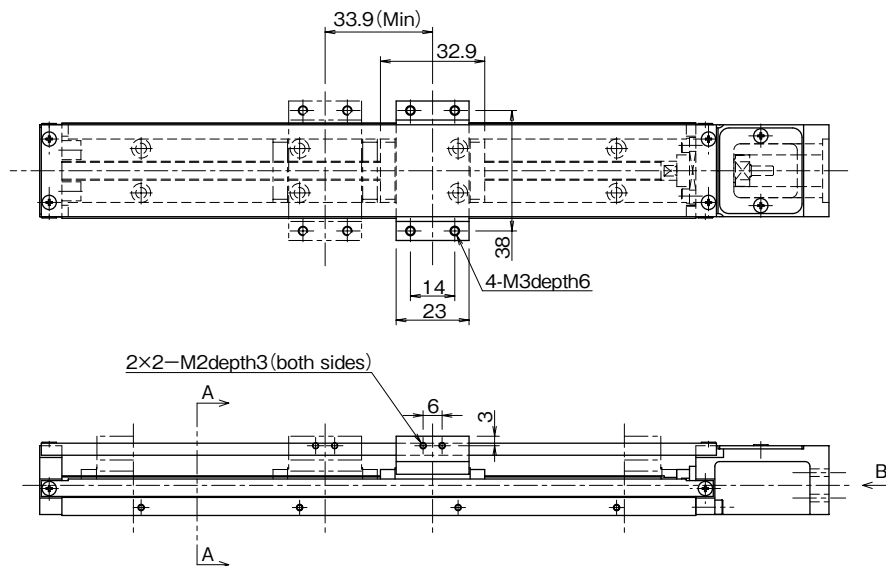

dimensions						stroke limit	
L ₁	L ₂	N ₁	M ₁ × P ₁	N ₂	M ₂ × P ₂	BG15A	BG15B
75	124	12.5	1 × 50	12.5	1 × 50	30	—
100	149	25		25		55	—
125	174	12.5	2 × 50	12.5	2 × 50	80	46
150	199	25		25		105	71
175	224	12.5	3 × 50	12.5	3 × 50	130	96
200	249	25		25		155	121

Stroke limit is a drive distance between both ends of the dampers.